Product Data Sheet | 4314/17T



4314/17T

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 5

3.1 Operating Data - Electrical Interface - Input 5
3.2 Electrical Operating Data 6
3.3 Operating Data - Electrical Interface -Output 7
3.4 Electrical Features 9
3.5 Aerodynamic 10
3.6 Sound Data 11

4 Environment 11

4.1 General 11
4.2 Climatic requirements*) 11

5 Safety 12

5.1 Electrical Safety 12
5.2 Approval Tests 12

6 Reliability 12

6.1 General 12

1 General

Fan type	Fan	
Rotational direction looking at rotor	clockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position	any	

2 Mechanics


2.1 General

Width	119,0 mm	
Height	119,0 mm	
Depth	32,0 mm	
Weight	0,220 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	wire outlet corner: 20 Ncm remaining corners: 20 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Length of lead wire Tolerance	L = 310 mm +- 10,0 mm	
Wire gauge (AWG)	24	
Insulation diameter	1,55 mm	
Contact	see drawing	



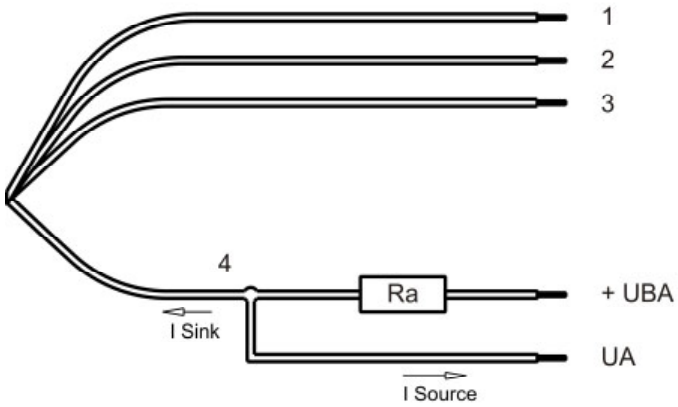

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	NTC
Wire 4	white	Alarm



The auxilliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	cExternal Temperature Sensor

Features

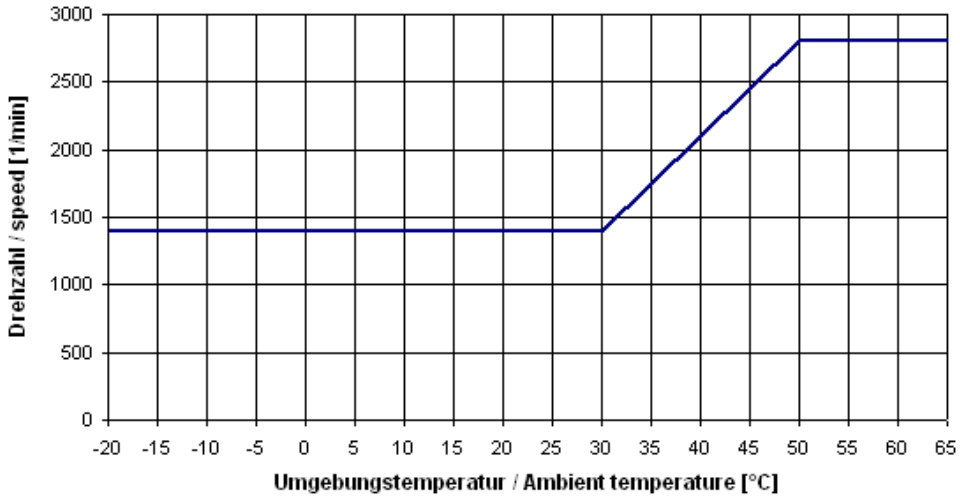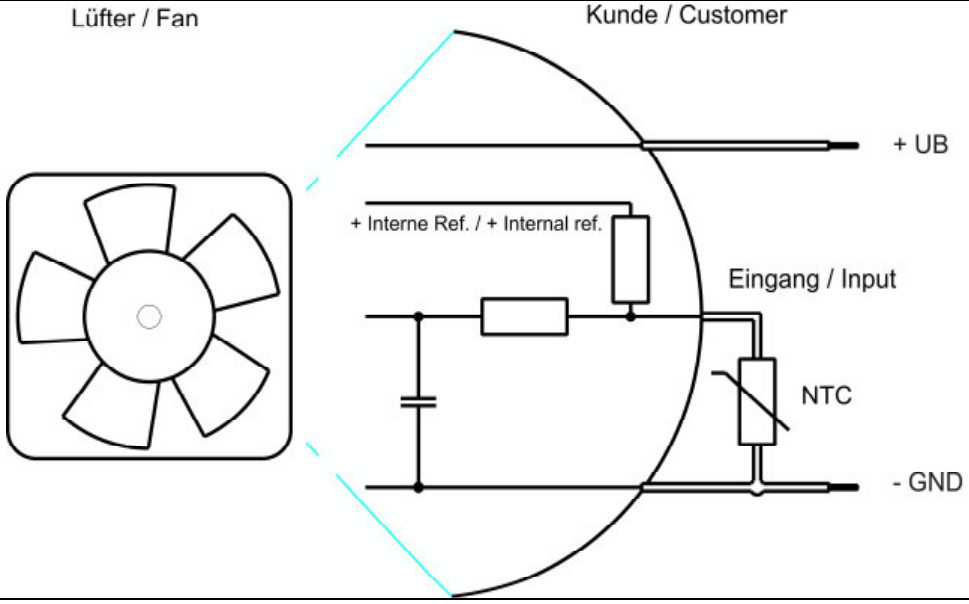Characteristics	
Schematics	

3.2 Electrical Operating Data

Measurement conditions:	Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal;warm-up time before measuring 5 minutes (unless otherwise specified).In the intake and outlet area should not be any solid obstruction within 0,5 m.

Δp = 0:	corresp. to free air flow (see section 3.5)
I:	corresp. to arithm. mean current value

Name	Condition		
TU 0001	TU: >= 50 °C		
NTC 0001	NTC <= 34 kOhm		

Features	Condition	Symbol	Values		
Voltage range	Δp = 0	U	18,0 V		32,0 V
Nominal voltage	Δp = 0	U_N		24,0 V	
Power consumption Tolerance	Δp = 0 TU / NTC 0001	P	2,9 W +- 25,0 %	4,8 W +- 25,0 %	5,8 W +- 25,0 %
Current consumption Tolerance	Δp = 0 TU / NTC 0001	I	160 mA +- 25,0 %	200 mA +- 25,0 %	180 mA +- 25,0 %
Speed Tolerance	Δp = 0 TU / NTC 0001	n	2.250 1/min +- 12,5 %	2.800 1/min +- 9,0 %	2.800 1/min +- 9,0 %
Starting current consumption				780 mA	

Name	Condition		
TU 0002	TU: <= 30 °C		
NTC 0002	NTC >= 78 kOhm		


Features	Condition	Symbol	Values		
Voltage range	Δp = 0	U	18,0 V		32,0 V
Nominal voltage	Δp = 0	U_N		24,0 V	
Power consumption Tolerance	Δp = 0 TU / NTC 0002	P	1,2 W +- 25,0 %	1,6 W +- 25,0 %	2,2 W +- 25,0 %
Current consumption Tolerance	Δp = 0 TU / NTC 0002	I	66 mA +- 25,0 %	68 mA +- 25,0 %	68 mA +- 25,0 %
Speed Tolerance	Δp = 0 TU / NTC 0002	n	1.400 1/min **)	1.400 1/min **)	1.400 1/min **)

****) *Vario Pro:***	Unless otherwise specified in the table a general fan speed tolerance applies, relating to the maximum value of the required characteristic curve. Tolerance:+- 9,0 %

3.3 Operating Data - Electrical Interface -Output

Tacho type	None

Alarm type	/17 (high = ok, Open collector)

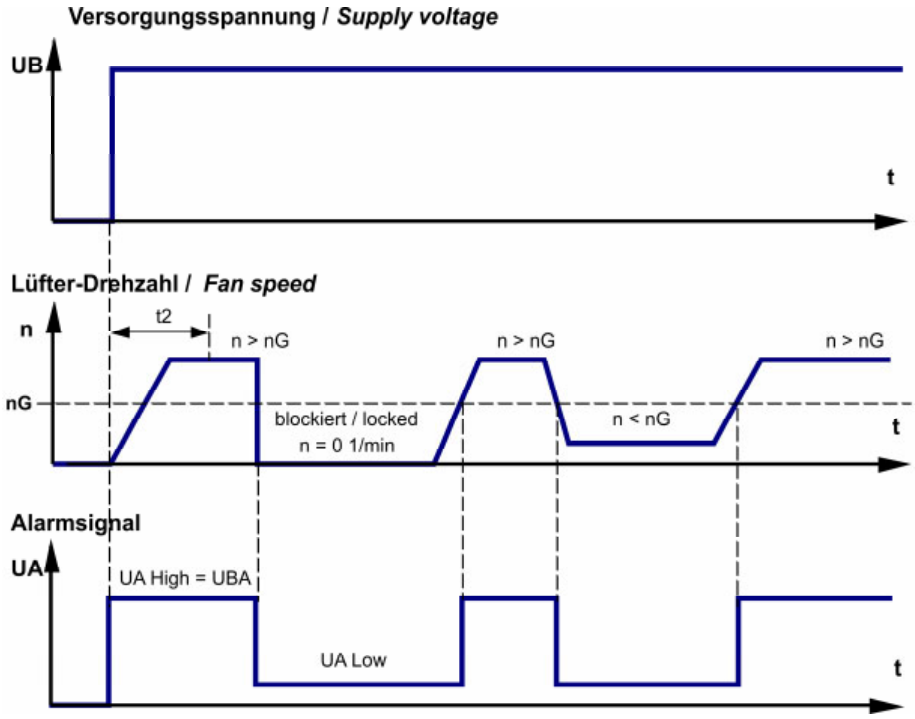


$$Ra = \frac{UBA - UA\ Low}{I\ Sink}$$

Features	Note	Values
Alarm operating voltage (UBA)		<= 60 V
Alarm signal Low *)	I sink: 2 mA	<= 0,4 V
Alarm signal High *)	I source: 0 mA	60 V
Maximum sink current		<= 20 mA
External resistor	External resistor Ra from UBA to UA required. All voltage measured to GND.	
Alarm start-up delay time (t2)		<= 15 s
Alarm trip speed limit (nG) Tolerance		1.150 1/min +- 100 1/min
Alarm at sense failure	Yes	
Alarm latch	No	
Alarm isolated from motor	No	

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at Un	Rectifying diode IF <= 20 mA	
Locked rotor protection	Auto restart	
Locked rotor current at Un	approx. 780 mA	
Clock signal t3/t4 at locked rotor	Typical: 0,6 s / 10 s	

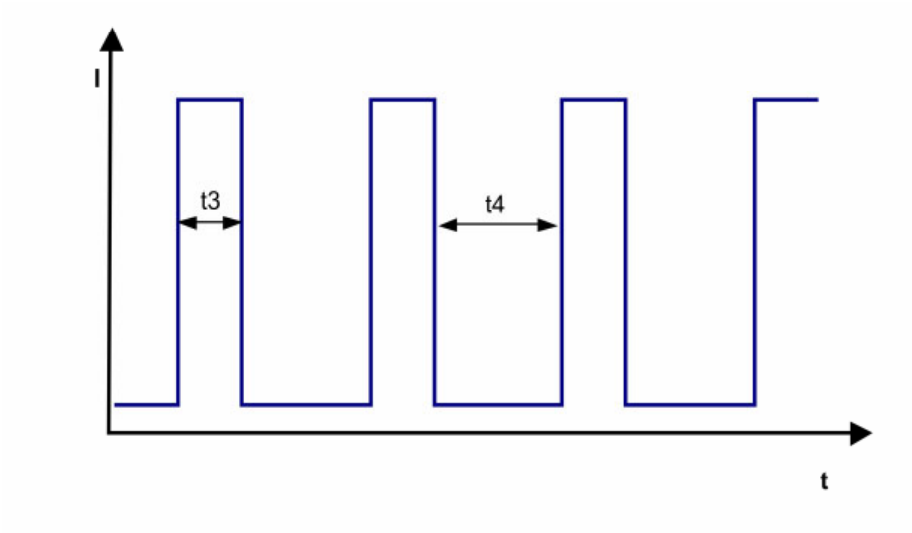


3.5 Aerodynamic

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

2.800 1/min at free air flow	TU >= 50 °C NTC <= 34 kOhm		

Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)	170,0 m3/h	
Max. static pressure (Δp = max. / $\dot{V}$ =0)	78 Pa	

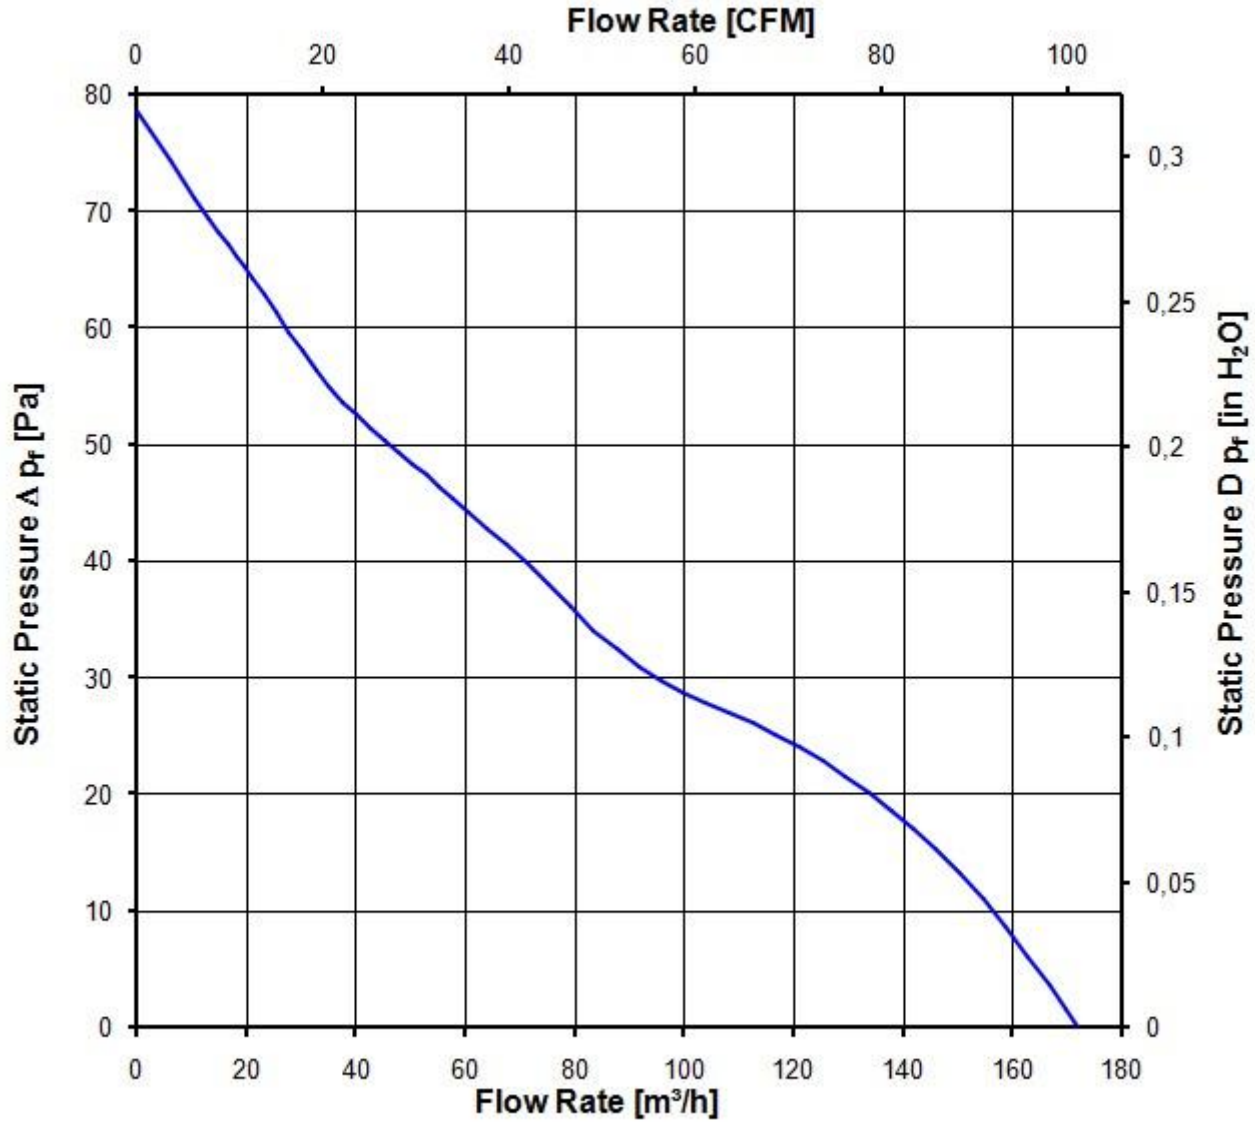

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

2.800 1/min at free air flow	TU >= 50 °C NTC <= 34 kOhm		

Optimal operating point	134,0 m3/h @ 17 Pa	
Sound power level at the optimal operating point	5,8 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	45,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

*) Permittet application area:
The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)
There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests

CE	Yes
UL	Yes / UL507, Electric Fans
VDE	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Yes / C22.2 No. 113 Fans and Ventilators
CCC	No

The approval tests are observed to:
U approval max.:28 V @ TU approval max.: 65 °C


6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	65.000 h	
Life expectancy L10 at TU max.	35.000 h	
Life expectancy L10 IPC (40 °C)	110.000 h	

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN 34 beachten

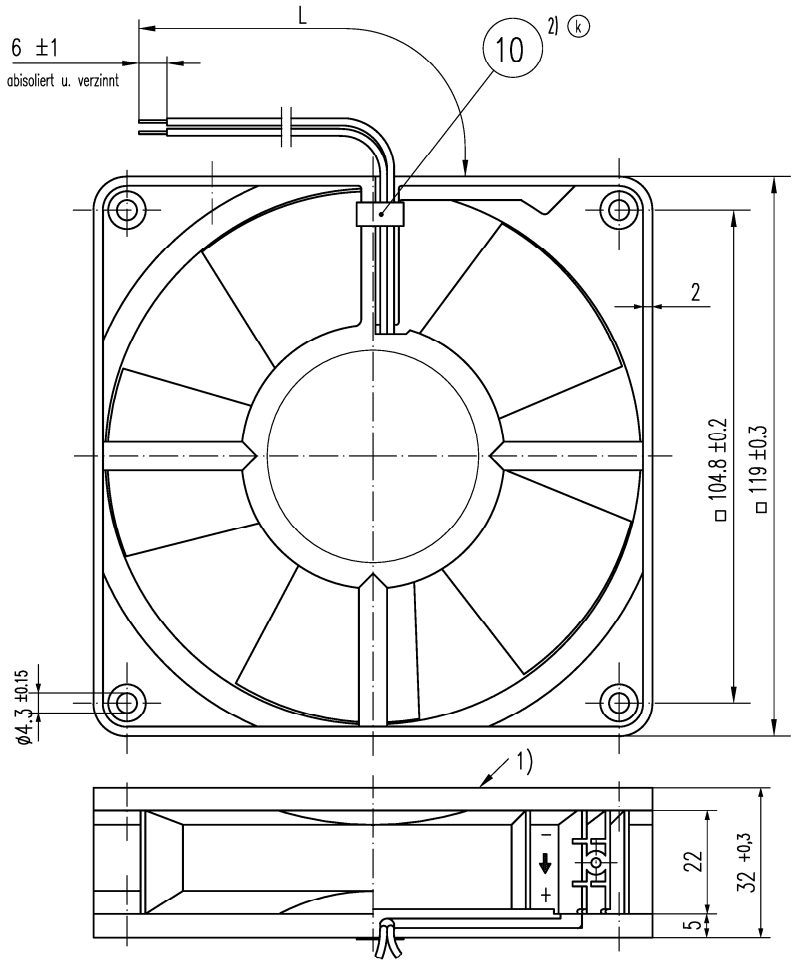

1) Rotorüberstand bis max. 0.4 mm zulässig.
2) nur wenn in Stückliste vermerkt
Axialspiel bei: - Kugellagerung (K) : 0 (mit Federausgleich)
- Gleitlagerung (G) : 0.1 - 0.5

(i) Anzahl und Länge der Litzen siehe BV - Blatt1

082
516
3...
240
235
231
210

Allgemeintoleranzen
DIN ISO 2768 – c

					Datum	Name
k						
i				Erstellt		
h				Geprüft		
g						

Index	Änd.-Nr.	Datum	Geändert von

Zur Verwendung im Verteiler freigegeben
von am

PAPST
PAPST-MOTOREN GmbH & Co KG
D-78112 St.Georgen
Germany

Artikel | Maßstab
Zchg.-Nr. | Blatt
Ers.f.Zchg.: