W3G300-ER40-75

EC axial fan

with brushless DC motor

Automotive



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	**W3G300-ER40-75**	
Motor	**M3G074-CF**	
Nominal voltage	VDC	26
Nominal voltage range	VDC	18 .. 32
Method of obtaining data		fa
Speed (rpm)	min^{-1}	2900
Power consumption	W	210
Current draw	A	8
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	70

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

EC axial fan

with brushless DC motor

Automotive

Technical description

Weight	2.5 kg
Size	300 mm
Motor size	74
Impeller material	PBT plastic UL94 HB (black)
Fan housing material	PP plastic (black)
Number of blades	5
Airflow direction	A
Balancing grade according to DIN ISO 1940-1	G 10
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP24 KM, electronics IP6K9K
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H2
Max. permitted ambient temp. for motor (transport/storage)	+70 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Life expectancy	25,000 h (typical)
Technical features	- Lowering input - Tach output - Fault output (high-side switch max. 30 mA) - INVLIN (inverse linear control input) - Load dump (58 V) - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Standstill on cable break - Overvoltage detection - Thermal overload protection for electronics - Line undervoltage detection
Electrical hookup	Connector with cable
Motor protection	Reverse polarity and locked-rotor protection
With cable	Lateral
Sound level	94 dB(A), sound power level according to ISO 13347


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC axial fan

with brushless DC motor

Automotive

Product drawing

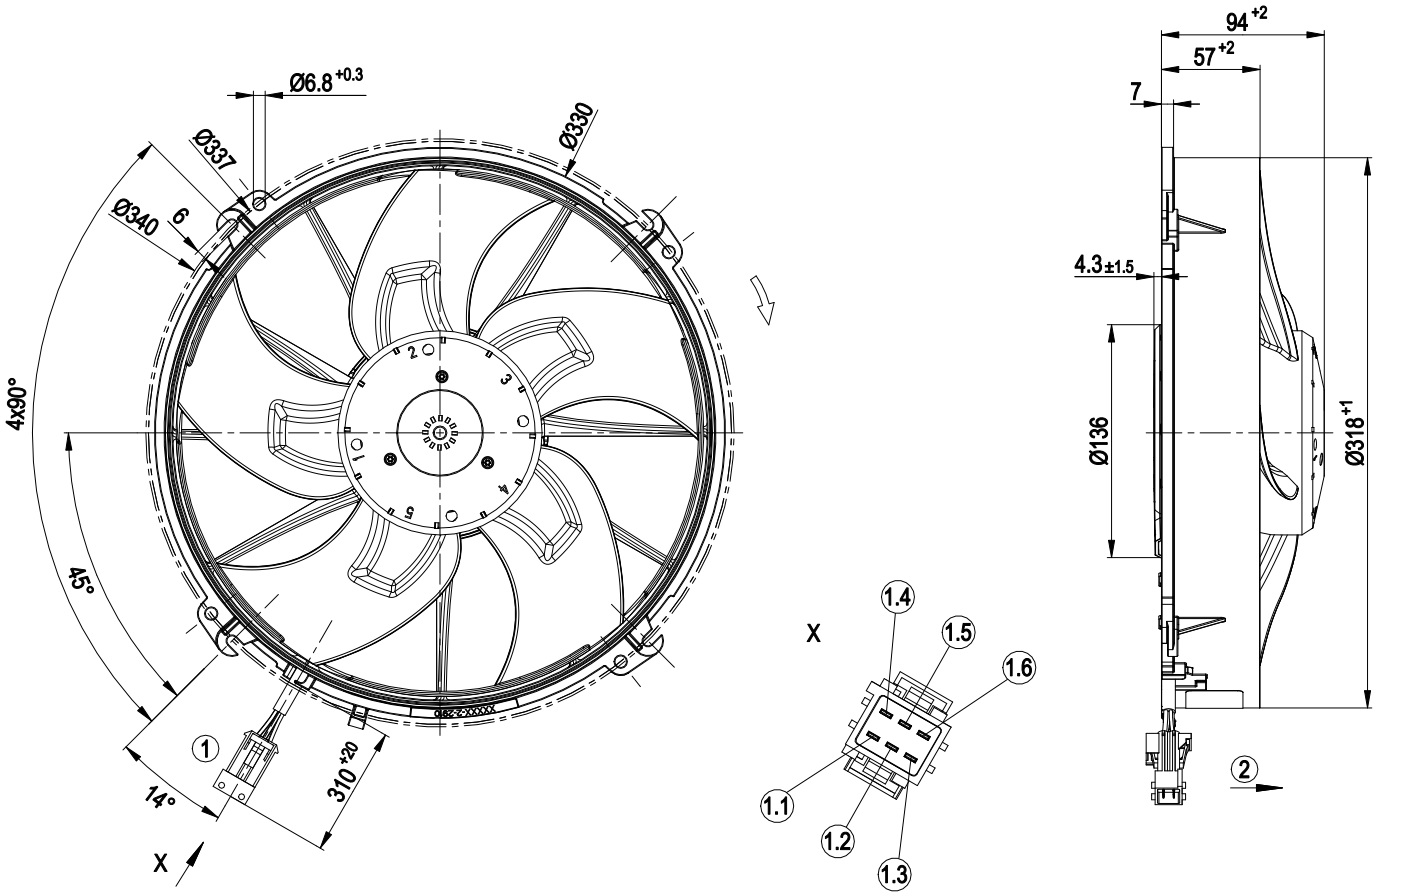

1	Cable with 6-pole coded plug tyco Junior Power Timer 1-962349-1
	cable (460 mm) with mating connector, part no. 02002-4-1021 not included in scope of delivery
1.1	+ UB (black)
1.2	GND (brown)
1.3	PWM/LIN (yellow)
1.4	INVLIN (orange)
1.5	ABSENK (blue)
1.6	Diagnostic output (white)
2	Direction of air flow "A"


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC axial fan

with brushless DC motor

Automotive

Connection diagram

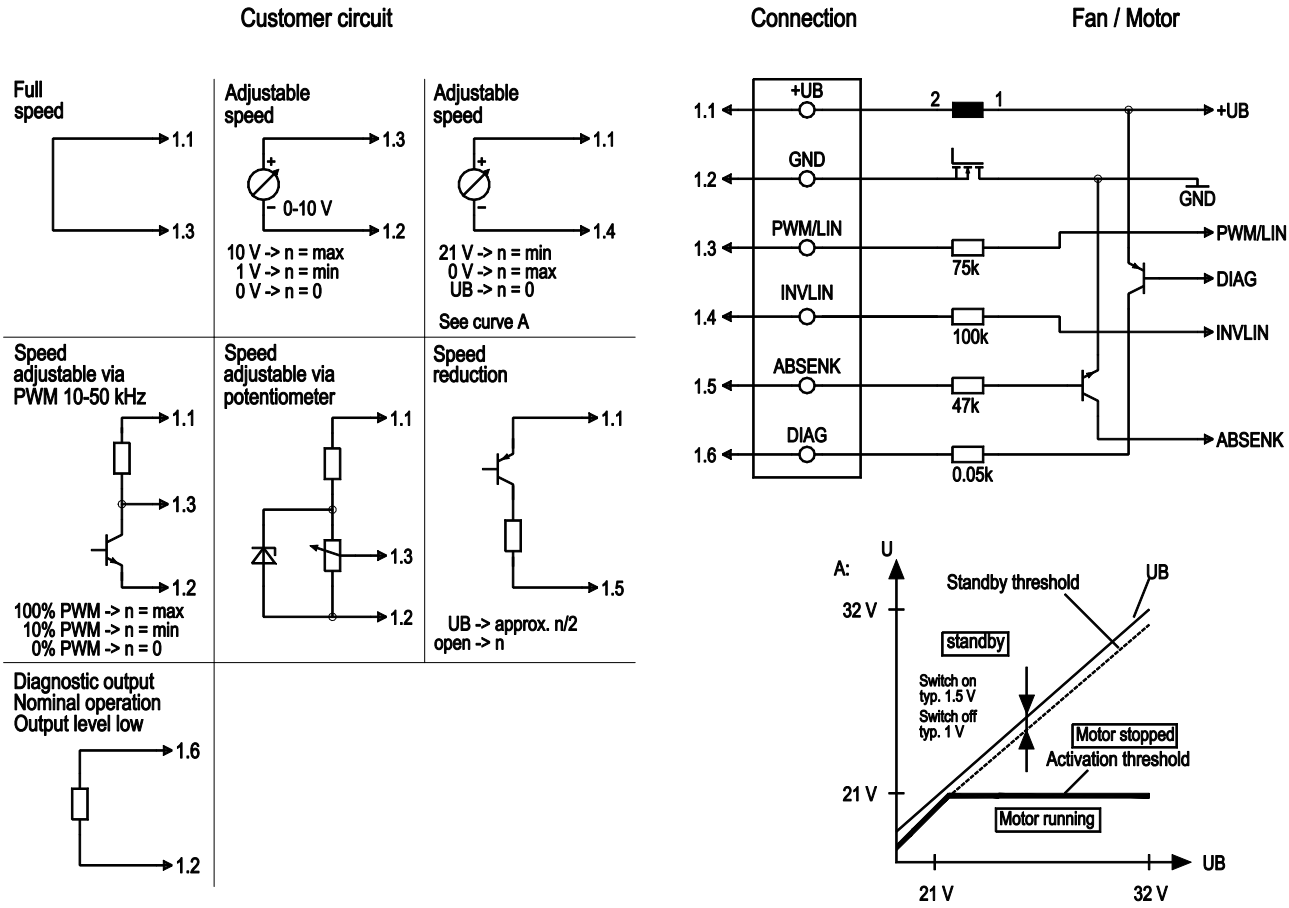

No.	Conn.	Designation	Function/assignment
	1.1	+UB	Power supply
	1.2	GND	Power supply GND, reference ground
	1.3	PWM/LIN	Analog voltage control input 0-10 V or PWM
	1.4	INVLIN	Control input, inverse linear
	1.5	ABSENK	Lowering input
	1.6	DIAG	Diagnostic output


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC axial fan

with brushless DC motor

Automotive

Curves: Air performance

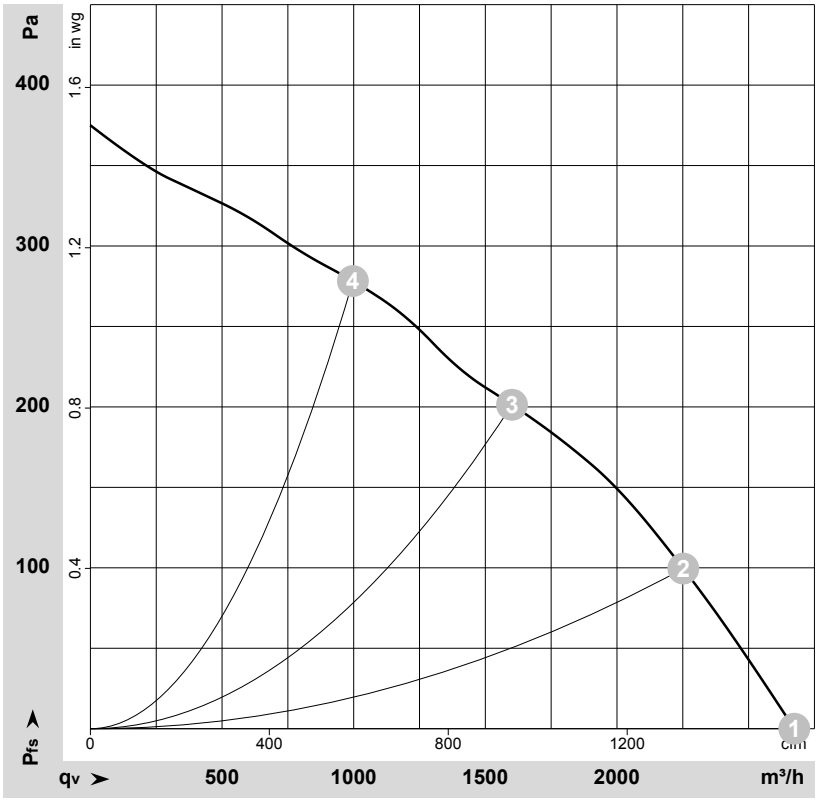

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-127024-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P_{ed}	I	q_V	p_{fs}	q_V	p_{fs}
	V	min^{-1}	W	A	m^3/h	Pa	cfm	in. wg
1	26	2900	210	8.00	2675	0	1575	0.00
2	26	2905	227	8.71	2250	100	1325	0.40
3	26	2890	246	9.49	1600	200	940	0.80
4	26	2765	277	10.65	995	280	585	1.12

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com