4418 MU

Customer specification:
Version: 1.1
Created: 17.06.2014
technical project manager:

INDEX

1 General 2
2 Mechanics 2
2.1 General 2
2.2 Motor 2
2.3 Connections 2
3 Operating Data 3
3.1 Operating Data - Electrical Interface - Input 3
3.2 Electrical Operating Data 3
3.3 Operating Data - Electrical Interface -Output 4
3.4 Electrical Features 4
3.5 Aerodynamic 5
3.6 Sound Data 6
4 Environment 6
4.1 General 6
4.2 Climatic requirements*) 6
4.3 Mechanical requirements 7
4.4 EMC 7
5 Safety 7
5.1 Electrical Safety 7
5.2 Approval Tests 7
6 Reliability 7
6.1 General 7
***7* Additional *Data* 8**

Special features according to QMH 2-5.4.7 and company standard 1-23.00 have the following definitions:

"A" : Product features or process parameters which influence the safety of a product or the compliance of legal requirements. (Must not necessary verified and documented 100%. Standards and legal requirements must be considered.)

"FK" : Product features or process parameters which influence the fit and function of a product or which have to be controlled or documented for some other reasons (e.g. Customer requirements).

1 General

Fan type	Fan	
Rotational direction looking at rotor	clockwise	**FK**
Airflow direction	Air outlet over struts	**FK**
Bearing system	Ball bearing	
Lubrication	see sectional drawing of the bearing	
Mounting position Tolerance	any	
Balancing grade	16	**FK**
Impeller weight	118,0 g	

2 Mechanics

2.1 General


Width	119 mm	
Height	119 mm	
Depth	38 mm	
Diameter	0 mm	
Weight	0,275 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	wire outlet corner: 80 Ncm remaining corners: 80 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Motor

Type of motor	Electronically commutated external rotor	
Diameter of the motor	35 mm	
Height of the motor	10 mm	
Number of phases	1	
Number of windings	2	
Operating mode	Continuous duty	
Insulation material class	E	

2.3 Connections

Electrical connection	Wires	
Length of lead wire Tolerance	L = 310 mm +- 10 mm	
Length of tube Tolerance	see drawing	
Wire gauge (AWG)	24	
Insulation diameter	1,10 mm	
Plug	see drawing	
Contact	see drawing	

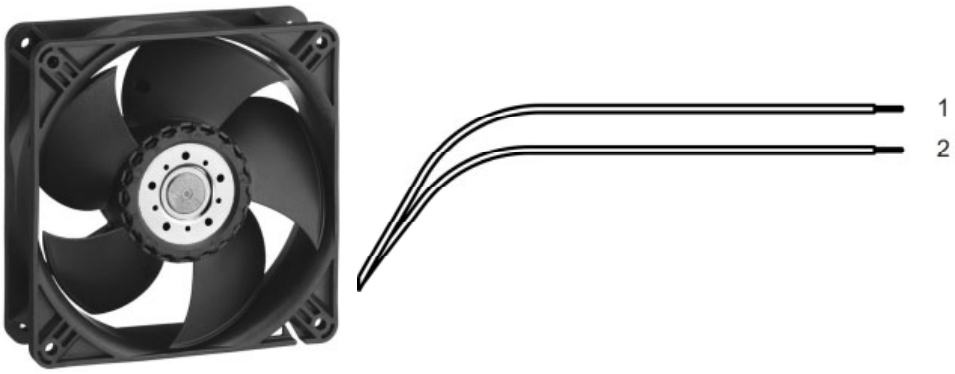

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	None

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal;warm-up time before measuring 5 minutes (unless otherwise specified).In the intake and outlet area should not be any solid obstruction within 0,5 m.

Δp = 0: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Features	Condition	Symbol	Values		
Voltage range	Δp = 0	U	36,0 V		60,0 V
Nominal voltage	Δp = 0	U_N		48,0 V	
Power consumption Tolerance	Δp = 0 0001	P	2,7 W +- 17,5 %	4,7 W +- 12,5 %	7,8 W +- 15,0 %
Current consumption Tolerance	Δp = 0 0001	I	76 mA +- 17,5 %	98 mA*) +- 12,5 %	130 mA +- 15,0 %
Speed Tolerance	Δp = 0 0001	n	2.600 1/min +- 12,5 %	3.300 1/min*) +- 7,5 %	3.860 1/min +- 10,0 %
Starting current consumption				< 650 mA	

*) Attention: Marked values are "FK" features


3.3 Operating Data - Electrical Interface -Output

Tacho type	None

Alarm type	None

3.4 Electrical Features

Electronic function	None	
Reversed polarity protection Max. residual current at Un	Rectifying diode IF < 100 uA	**A**
Locked rotor protection	Auto restart	**A**
Locked rotor current at Un	approx. 600 mA	
Clock signal t3/t4 at locked rotor	Typical: 0,6 s / 10 s	

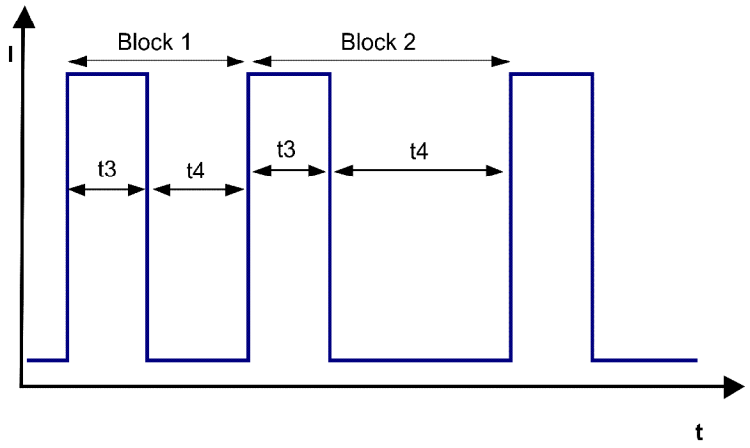

Block1: special locked rotor protection: 5 cycles t3 / t4 = 0,6 s / 1 s Block2: locked rotor protection t3 / t4 = 0,6 s / 10 s


3.5 Aerodynamic

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

3.300 1/min at free air flow

Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)	184,0 m3/h	**FK**
Max. static pressure (Δp = max. / $\dot{V}$ =0)	103 Pa	**FK**

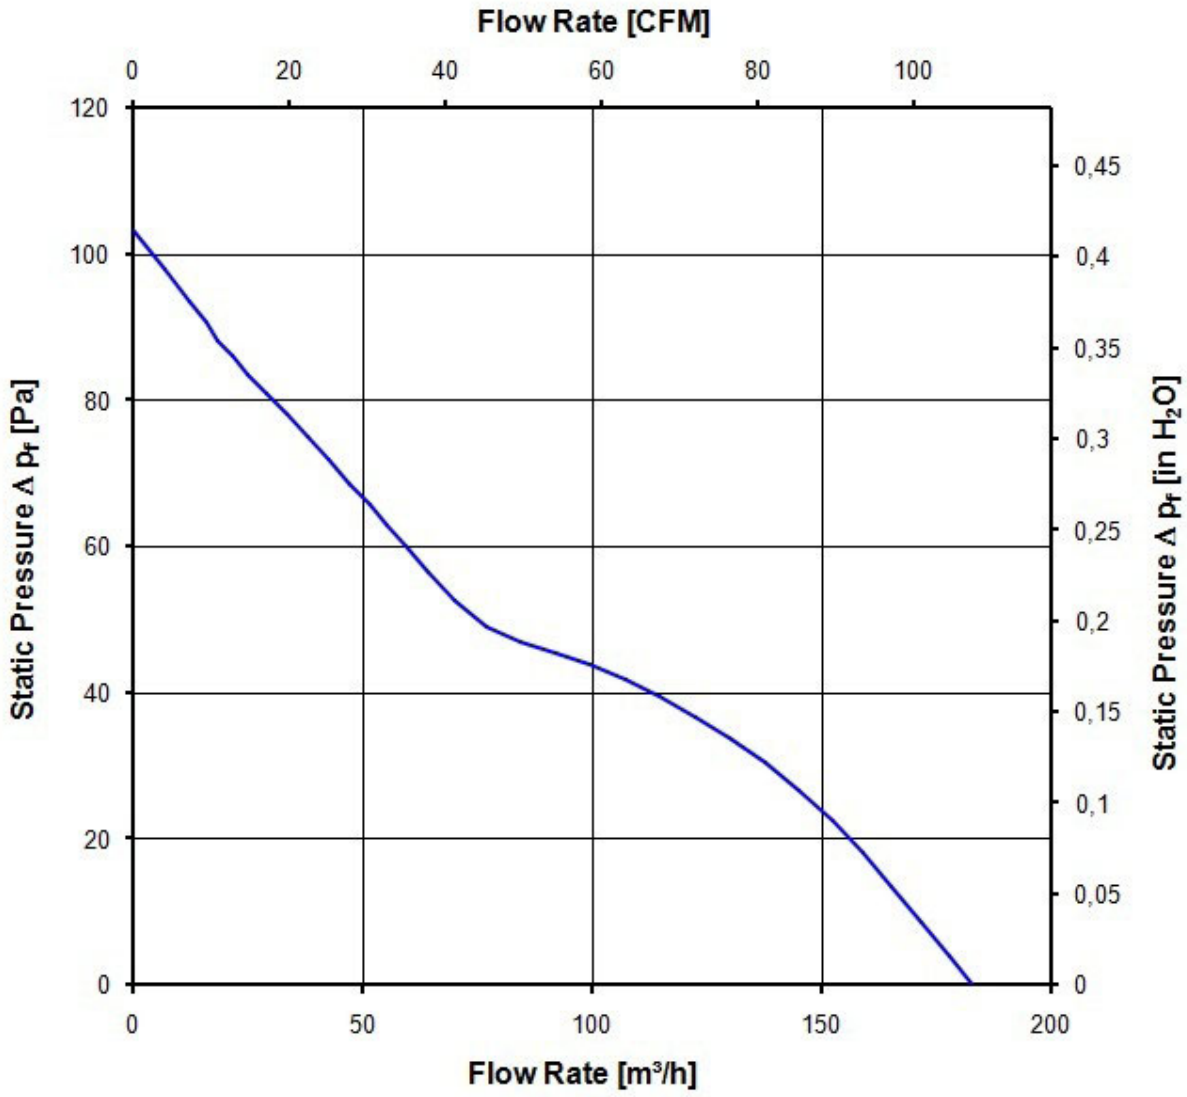

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

3.300 1/min at free air flow

Optimal operating point	106,0 m3/h @ 38 Pa	
Sound power level at the optimal operating point	5,3 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	43,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	85 °C	

4.2 Climatic requirements*)

Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Water exposure	Splash water check IPX4; according to DIN EN 60529 VDE 0470, not certified	
Radiation exposure	Solar radiation; according to DIN EN 60068-2-5	
Dust requirements	Dust check IP5X; according to DIN EN 60529 VDE 0470, not certified	
Salt fog requirements	salt fog, cyclic, in operation; according to DIN EN 60068-2-52, 3 cycle	
Harmful gas requirements	Mixed gas corrosion test; according to DIN EN 60068-2-60	

*) Permittet application area:
The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.

Pollution degree 3 (according DIN EN 60664-1)
It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

4.3 Mechanical requirements

Please require severity levels and specification parameters from the responsible development departments

4.4 EMC

not specified

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	**A**
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	III	

5.2 Approval Tests

CE	No
UL	Yes
VDE	Yes
CSA	Yes
CCC	Yes

The approval tests are observed to:
Maximal permitted operating voltage (see section 3.1) and max. permitted ambient temperature TU max.

6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	65.000 h	
Life expectancy L10 at TU max.	32.500 h	
Life expectancy L10 Delta (40 °C)	110.000 h	

7 Additional *Data*

