Product Data Sheet LE 624 HHPR-195 (1x)

ebmpapst

The engineer's choice



GREEN TECH

LE 624 HHPR-195 (1x)

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 4

3.1 Electrical Operating Data 4
3.2 Electrical Features 4
3.3 Aerodynamics 4
3.4 Sound Data 4

4 Environment 4

4.1 General 4
4.2 Climatic Requirements 4

5 Safety 5

5.1 Electrical Safety 5
5.2 Approval Tests 5

6 Reliability 5


6.1 General 5

1 General

2 Mechanics

2.1 General

2.2 Connections

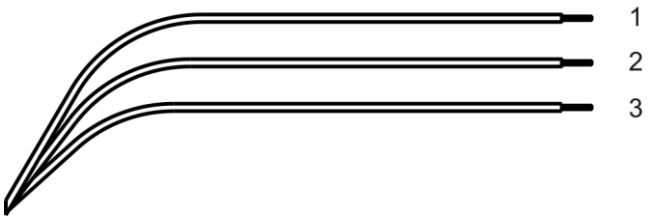

Wire	Color	Operation	Plug connection
1	brown	+ UB	Pin 1
2	yellow	- GND	Pin 3
3	blue	PWM	Pin 2

3 Operating Data

3.1 Electrical Operating Data

3.2 Electrical Features

3.3 Aerodynamics

Measurement conditions:	Measured with a double chamber intake rig. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

3.4 Sound Data

Measurement conditions:	Sound pressure level: 1 meter distance between microphone and the air intake. Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see chapter aerodynamics.

4 Environment

4.1 General

4.2 Climatic Requirements

not specified

Please require severity levels and specification parameters from the responsible development departments.

5 Safety

5.1 Electrical Safety

5.2 Approval Tests

CE	EC Declaration of Conformity	No
EAC	Eurasian Conformity	No
UL	Underwriters Laboratories	No
VDE	Association for Electrical, Electronic and Information Technologies	No
CSA	Canadian Standards Association	No
CCC	China Compulsory Certification	Not applicable

6 Reliability

6.1 General

9972207006