

4414MU

INDEX

1 General 3
2 Mechanics 3
2.1 General 3
2.2 Connections 3
3 Operating Data 4
3.1 Operating Data - Electrical Interface - Input 4
3.2 Electrical Operating Data 5
3.3 Operating Data - Electrical Interface -Output 5
3.4 Electrical Features 5
3.5 Aerodynamic 7
3.6 Sound Data 8
4 Environment 8
4.1 General 8
4.2 Climatic requirements*) 8
5 Safety 9
5.1 Electrical Safety 9
5.2 Approval Tests 9
6 Reliability 9
6.1 General 9

1 General

Fan type	Fan	
Rotational direction looking at rotor	clockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position	any	


2 Mechanics

2.1 General

Width	119 mm	
Height	119 mm	
Depth	38 mm	
Weight	0,275 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	wire outlet corner: 80 Ncm remaining corners: 80 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Length of lead wire Tolerance	310 mm +- 10 mm	
Wire gauge (AWG)	24	
Insulation diameter	1,10 mm	

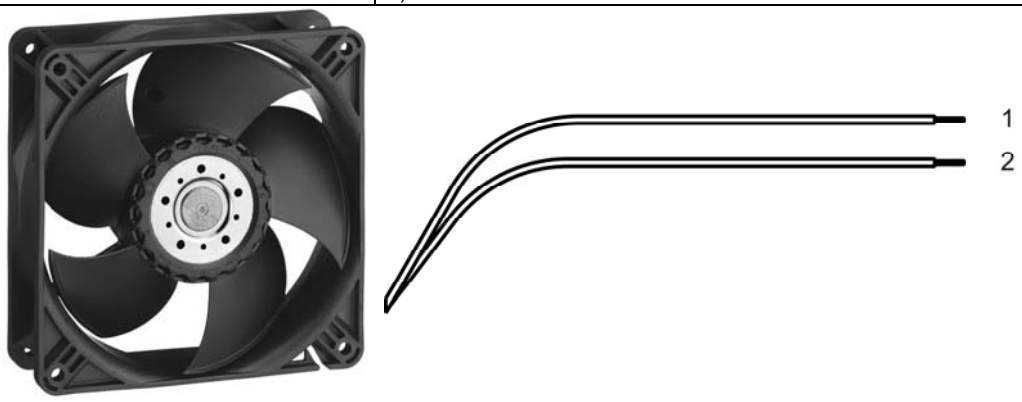

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	None

3.2 Electrical Operating Data

Measurement conditions:	Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal;warm-up time before measuring 5 minutes (unless otherwise specified).In the intake and outlet area should not be any solid obstruction within 0,5 m.

∆p = 0: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Features	Condition	Symbol	Values		
Voltage range	∆p = 0	U	18,0 V		28,0 V
Nominal voltage	∆p = 0	U_N		24,0 V	
Power consumption Tolerance	∆p = 0 0001	P	2,3 W +- 17,5 %	4,4 W +- 12,5 %	5,6 W +- 15,0 %
Current consumption Tolerance	∆p = 0 0001	I	130 mA +- 17,5 %	185 mA +- 12,5 %	200 mA +- 15,0 %
Speed Tolerance	∆p = 0 0001	n	2.600 1/min +- 12,5 %	3.300 1/min +- 7,5 %	3.550 1/min +- 10,0 %
Starting current consumption				< 1.100 mA	


3.3 Operating Data - Electrical Interface -Output

Tacho type	None

Alarm type	None

3.4 Electrical Features

Electronic function	None	
Reversed polarity protection Max. residual current at Un	Rectifying diode IF < 50 uA	
Locked rotor protection	Auto restart	
Locked rotor current at Un	approx. 1.100 mA	
Clock signal t3/t4 at locked rotor	Typical: 0,5 s / 2,7 s	

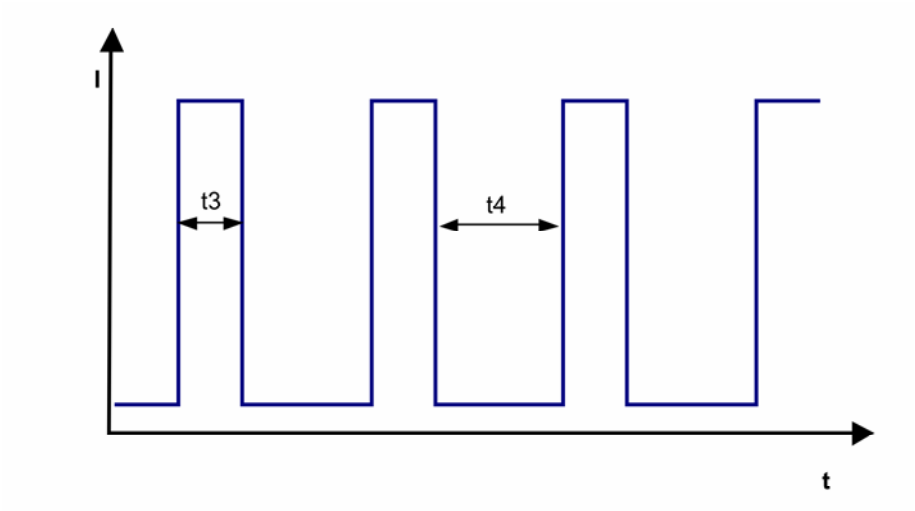
I
t3
t4
t


3.5 Aerodynamic

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m.

a.) Operation condition:

3.300 1/min at free air flow

Max. free-air flow (Δp = 0 / V̇ = max.)	184,0 m3/h	
Max. static pressure (Δp = max. / V̇ =0)	103 Pa	

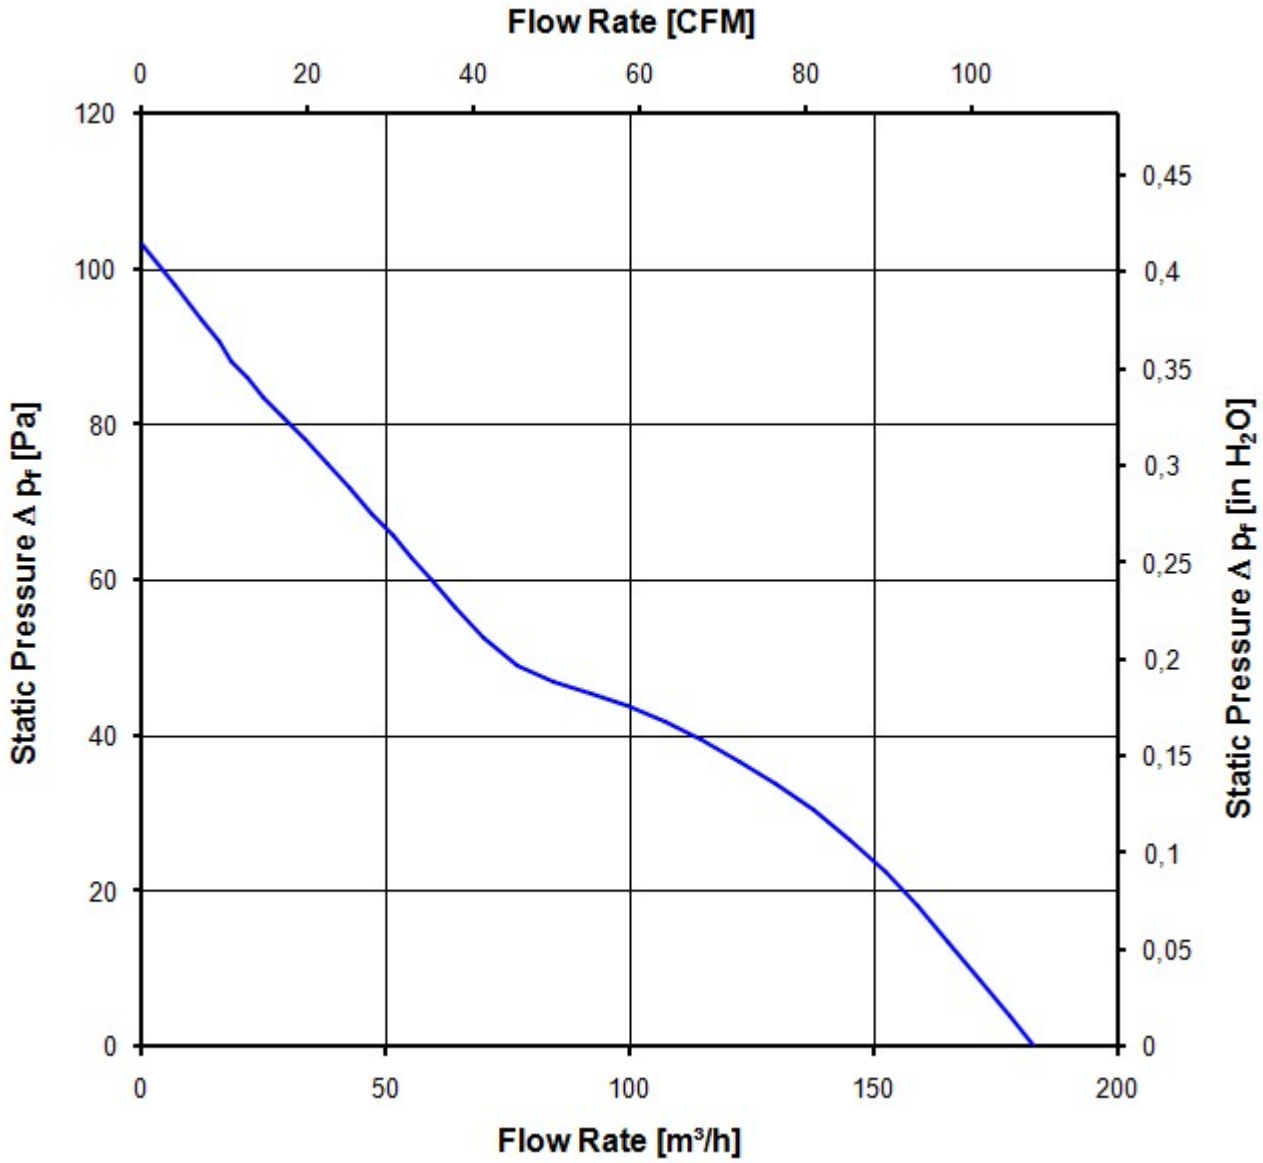

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

3.300 1/min at free air flow

Optimal operating point	106,0 m3/h @ 38 Pa	
Sound power level at the optimal operating point	5,3 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	43,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements*)

Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Water exposure	Splash water check IPX4; according to DIN EN 60529 VDE 0470, not certified	
Radiation exposure	Solar radiation; according to DIN EN 60068-2-5	
Dust requirements	Dust check IP5X; according to DIN EN 60529 VDE 0470, not certified	
Salt fog requirements	salt fog, cyclic, in operation; according to DIN EN 60068-2-52, 3 cycle	
Harmful gas requirements	Mixed gas corrosion test; according to DIN EN 60068-2-60	

*) Permittet application area:
The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.Pollution degree 3 (according DIN EN 60664-1)
It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Air and leakage distances	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests

UL	In process
VDE	In process
CSA	In process


The approval tests are observed to:
Maximal permitted operating voltage (see section 3.1) and max. permitted ambient temperature TU max.


6 Reliability


6.1 General

L10 @ 40°C (ebmpapst standard): 65.000h
L10 @ 40°C (IPC standard): 110.000h

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

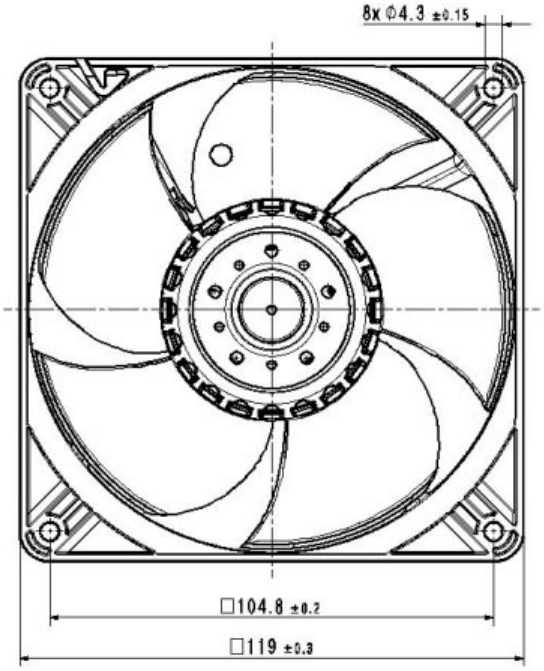

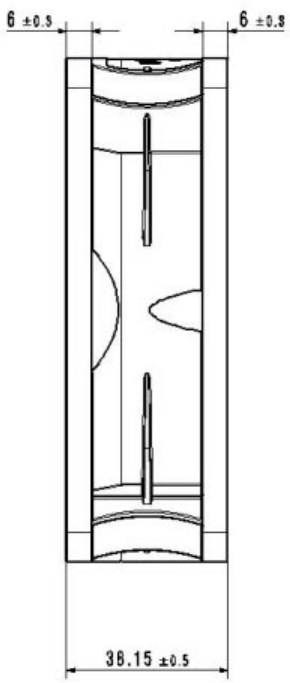

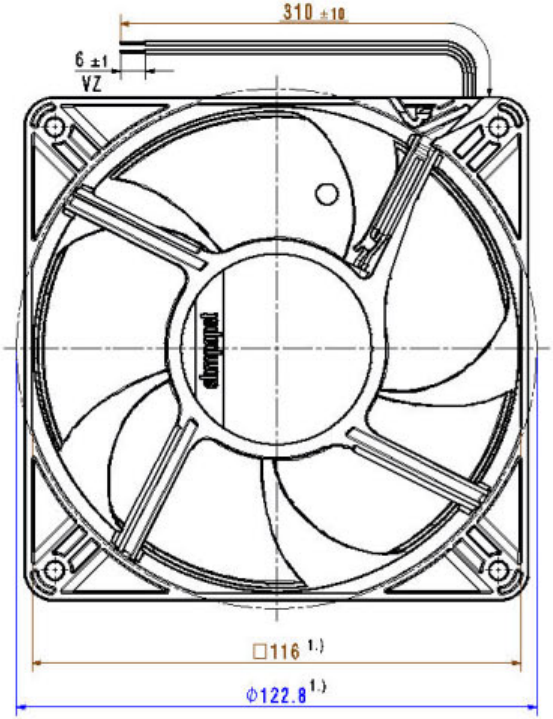

1.) Maße fuer Montageausschnitt
- Axialspiel: mit Feder spielfrei verspannt
- Max. Anzugsmoment bei Montage über beide Befestigungsflansche = 0.8 Nm

1.) measures for mounting cut-out
- without axial clearance by a pre-loaded spring
- Max. torque when mounted across both mounting flanges = 0.8 Nm

VZ = verzinnt / tinned

ebmpapst

ebm-papst St.Georgen GmbH & Co KG