Product Data Sheet RER133-41/18/2TDP

ebmpapst

The engineer's choice



GREEN TECH

RER133-41/18/2TDP

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 4

3.1 Electrical Interface - Input 4
3.2 Electrical Operating Data 5
3.3 Electrical Interface - Output 6
3.4 Electrical Features 7
3.5 Aerodynamics 8
3.6 Sound Data 9

4 Environment 9

4.1 General 9
4.2 Climatic Requirements 9

5 Safety 10

5.1 Electrical Safety 10
5.2 Approval Tests 10

6 Reliability 10

6.1 General 10

1 General

Fan type	Radial blower without chassis with intake nozzle	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air in axially, Air out radially	
Bearing system	Ball bearing	
Mounting position - shaft	Any	


2 Mechanics

2.1 General

Depth	91,0 mm	
Diameter	133,0 mm	
Mass	0,890 kg	
Housing material	--	
Impeller material	Plastic	

2.2 Connections

Electrical connection	Wires	
Lead wire length Tolerance	L = 425 mm +- 10,0 mm	
Tube length Tolerance	S = 115 mm +- 5,0 mm	
Wire size (AWG)	22	
Insulation diameter	1,35 mm	

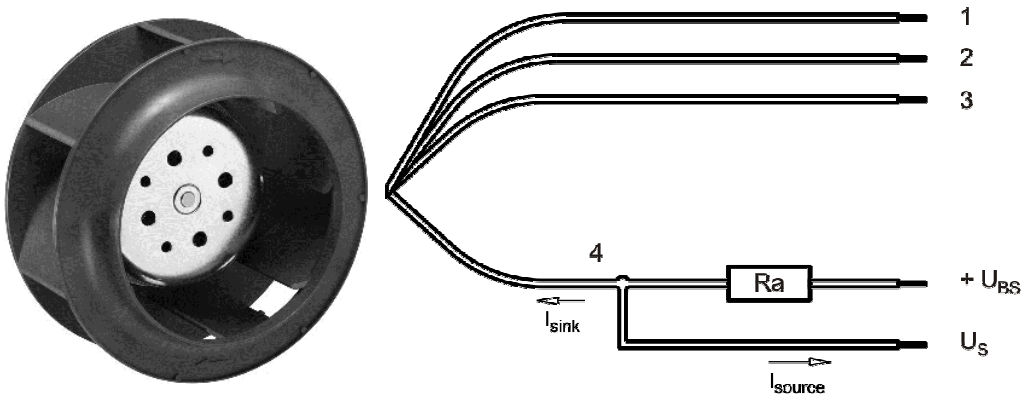

Wire	Color	Operation
1	red	+ UB
2	blue	- GND
3	violet	PWM
4	white	Tacho

The auxilliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

3 Operating Data


3.1 Electrical Interface - Input

Control input	PWM


Features

Inpute type	Open collector	
PWM - Frequency		1 kHz - 10 kHz typical: 2 kHz

Characteristics

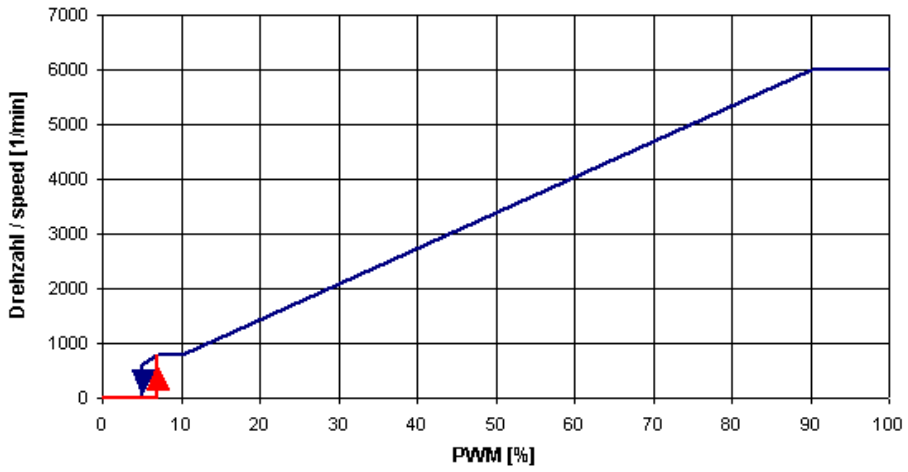

Schematics

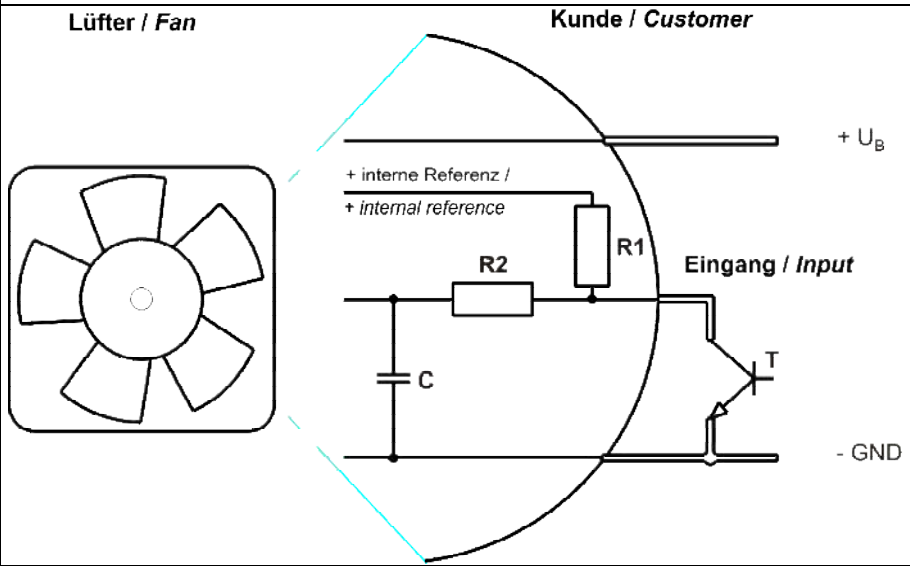

Speed control:
By Puls-width-modulation (PWM) 0 ... 100%
Open collector in relation to signal ground
f = 2kHz +-20%

Information to the curve:

0 % - 7% PWM:	0 1/min
7 % PWM:	800 1/min (Fan on, comming from 0% PWM)
7 % - 10% PWM:	800 1/min (corresponding to min. speed)
10 % - 90% PWM:	linear increasing curve
90 % - 100% PWM:	6.000 1/min (corresponding to max. speed)
7 % - 5 % PWM:	linear decreasing curve (comming from 100% PWM)
5 % PWM:	600 1/min or 0 1/min (Fan off, comming from 100% PWM)

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified).
In the intake and outlet area should not be any solid obstruction within 0,5 m.

Measurement setup:	Measured between two steel plates
Steel plate:	140 mm x 140 mm
Intake nozzle:	D: 87 mm; R: 7 mm
Distance between bottom and top plate:	101 mm
Overlapping impeller / nozzle:	2 mm

Δp = 0: corresp. to free air flow (see chapter aerodynamics)
I: corresp. to arithm. mean current value


Name	Condition		
PWM 0001	PWM: 100 %; f: 2 kHz		

100% PWM; f = 2 kHz or broken lead wire (open control input)

Features	Condition	Symbol	Values		
Voltage range		U	36 V		72,0 V
Nominal voltage		U_N		48,0 V	
Power consumption Tolerance	Δp = 0 PWM 0010	P	88,2 W +- 10,0 %	87 W +- 10,0 %	92,9 W +- 10,0 %
Current consumption Tolerance	Δp = 0 PWM0010	I	2.450 mA +- 10,0 %	1.800 mA +- 10,0 %	1.290 mA +- 10,0 %
Speed Tolerance	Δp = 0 PWM 0010	n	6.000 1/min +- 7,5 %	6.000 1/min +- 7,5 %	6.000 1/min +- 7,5 %

3.3 Electrical Interface - Output

Tacho type	/2 (open collector)

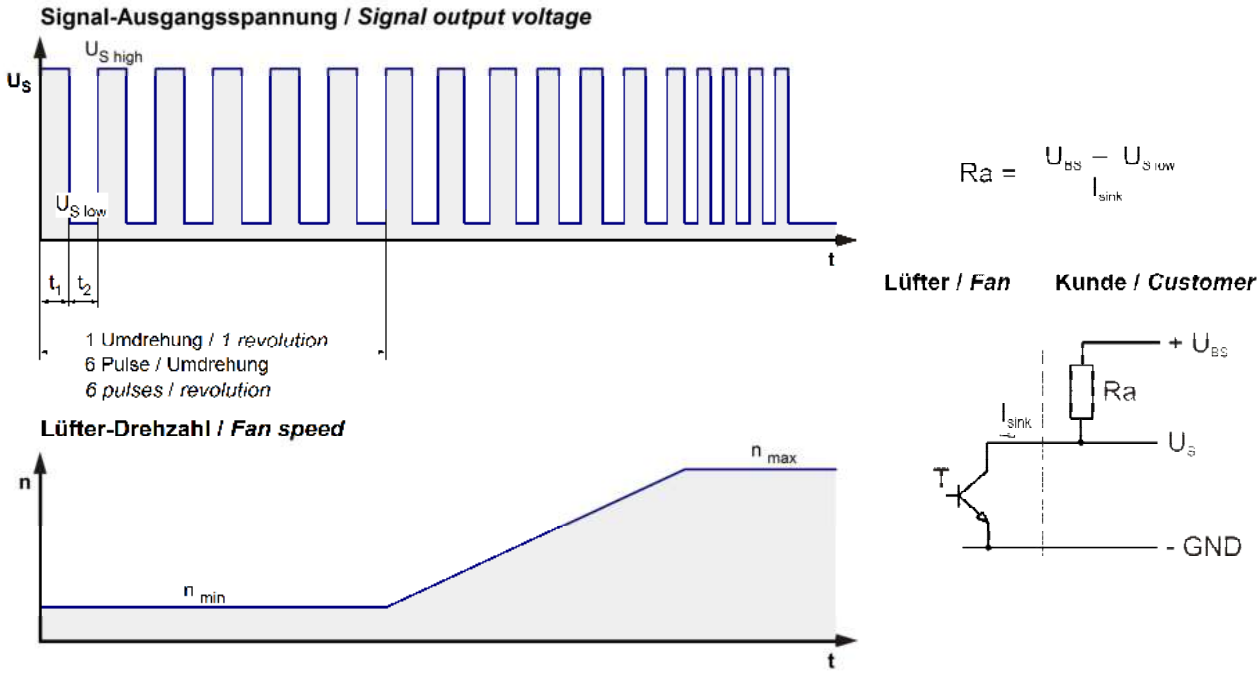


Features		Note	Values
Tacho operating voltage	U_{BS}		<= 60,0 V
Tacho signal Low	$U_{S\ low}$	I sink: 2 mA	<=0,4 V
Tacho signal High	$U_{S\ high}$	I source: 0 mA	<=60,0 V
Maximum sink current	I_{sink}		<= 20 mA
Maximum source current			0 mA
External resistor		External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency		(6 x n) / 60	600 Hz
Tacho isolated from motor		No	
Slew rate			=> 0,5 V/us

n = revolutions per minute (1/min)

Please note:
At zero speed the tacho signal is at a static HIGH. It will be also HIGH when the fan is still spinning, but the speed control signal is set to zero speed already.
The tacho signal is only activated after the start-up is completed.

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at U_N	P-CH FET I_F <= 5 mA	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 1.400 mA	
Clock signal at locked rotor	t_3 / t_4 typical: 3,2 s / 10,0 s	

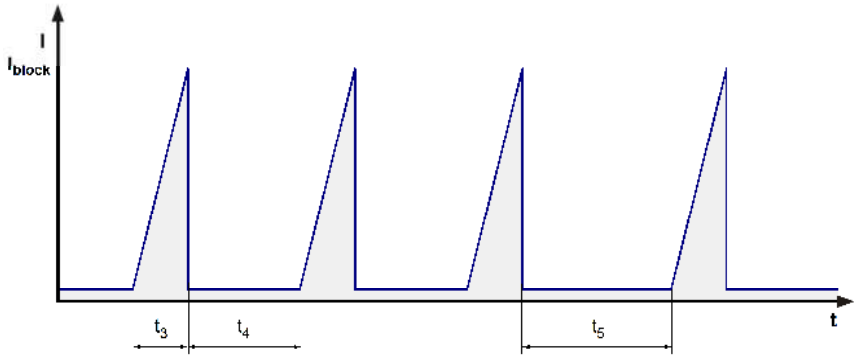

Locked rotor signal t5:
After 4 failed start-ups there is an extended timeout of 40 s.

3.5 Aerodynamics


Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

Measurement setup:	Measured between two steel plates
Steel plate:	140 mm x 140 mm
Intake nozzle:	D: 87 mm; R: 7 mm
Distance between bottom and top plate:	101 mm
Overlapping impeller / nozzle:	2 mm

a.) Operation condition:

6.000 1/min at free air flow	PWM 100 %; f: 2 kHz		

Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)	540,0 m3/h	
Max. static pressure (Δp = max. / $\dot{V}$ =0)	770 Pa	

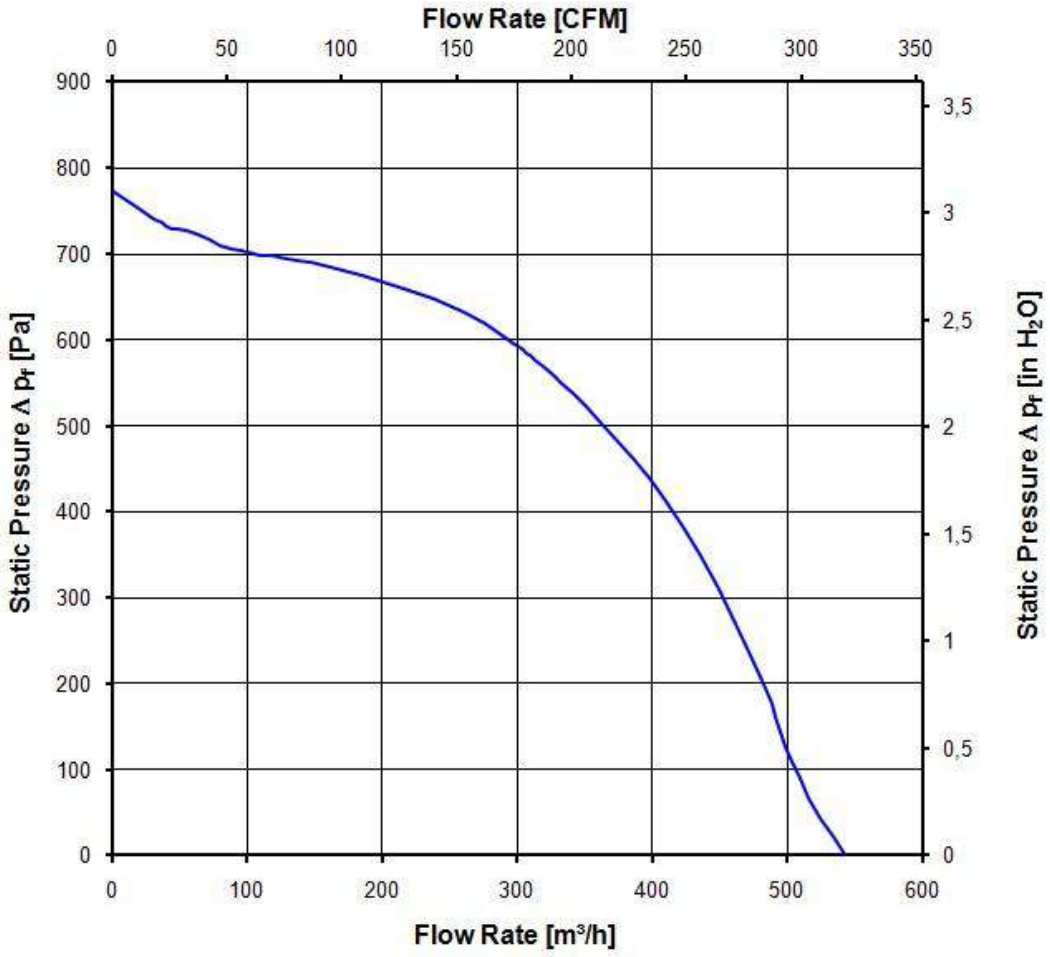

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

6.000 1/min at free air flow	PWM 100 %; f: 2 kHz		

Optimal operating point	475,0 m3/h @ 198 Pa	
Sound power level at the optimal operating point	8,2 bel(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

Permitted application area:
The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)
There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	 1000 VAC / 1 Min. 1000 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	I	

5.2 Approval Tests

CE	EC Declaration of Conformity	No
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

The approval tests are observed to:
U approval max.:72,0 V @ TU approval max.: 65,0 °C


6 Reliability


6.1 General


Life expectancy L10 at TU = 40 °C	70.000 h	
Life expectancy L10 at TU max.	37.500 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	117.500 h	


Copy of this document, any giving it access and any use or communication of its contents thereof, are forbidden - Data stored electronically differ from the document of example. All rights are reserved in the event of the grant of a patent or of registration of a utility model or design.


Schutzvermerk nach DIN ISO 16016 beachten
Note to protect as per ISO 16016

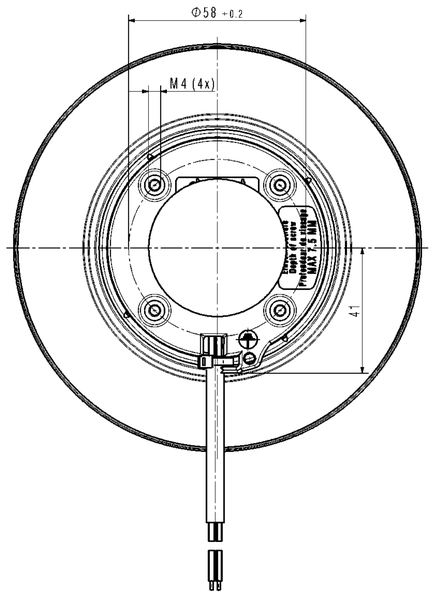

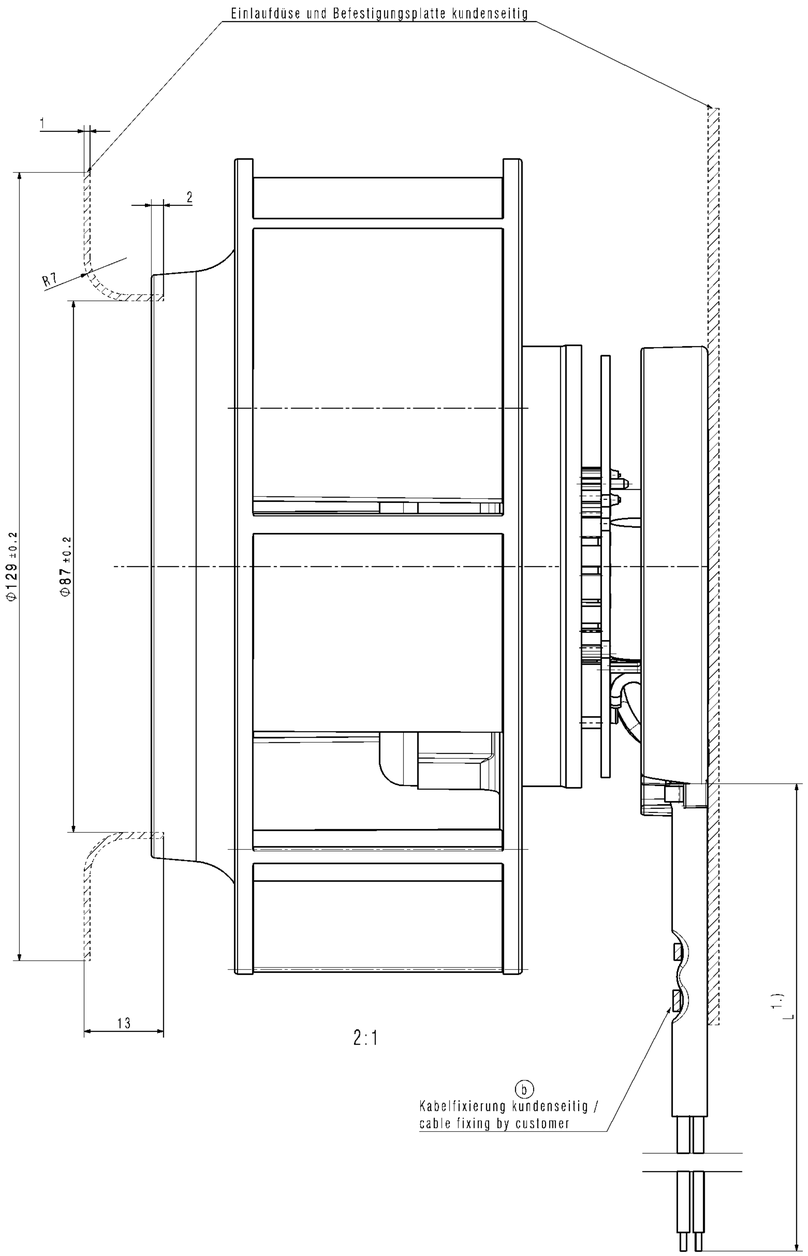


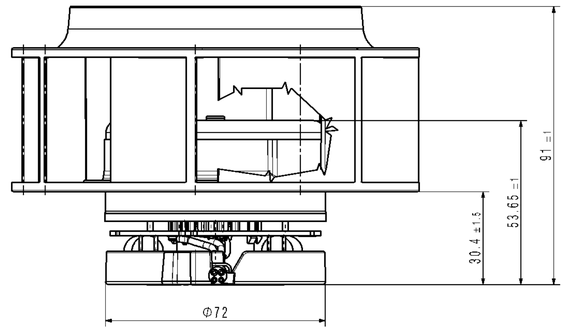

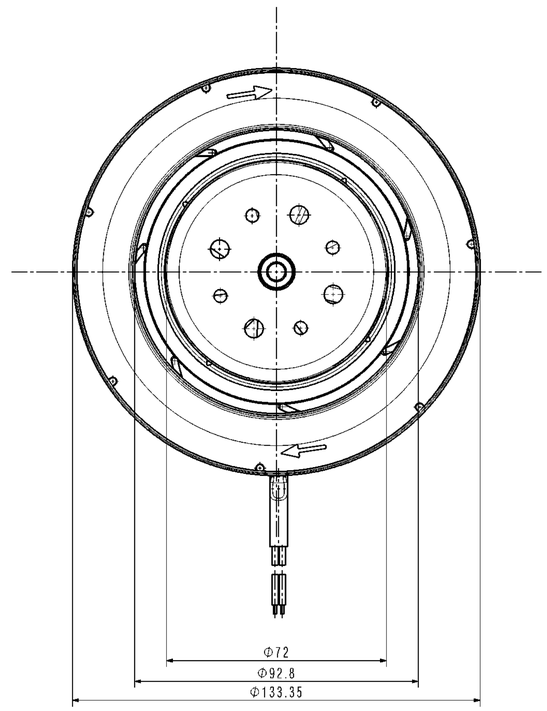



1:2



1:2

1.) Anzahl und Länge der Litzen sowie Länge des Schlauches siehe Produktspezifikation

- Axialspiel der Kugellager mit Feder spielfrei gelagert

1.) length and number of wires and length of tube see design specification

-ball bearing without clearance by a pre-load spring

Bei Übergabe von CAD-Daten bleibt diese Zeichnung bindendes Dokument. Bei Unstimmigkeiten gelten die Angaben in der Zeichnung.

In case of handed over CAD data is this drawing binding document. In event of discrepancies the specifications in this drawing are binding.

(A X: XXX) = Merkmale unterliegen einer besonderen Archivierung characteristics are subject to special filing

(FK X: XXX) = Funktionskritische Merkmale function-critical characteristics

(PK X: XXX) = Prozeßkritische Merkmale process-critical characteristics

Gesamt Anzahl/ Total Number	Merkmale / Characteristics	Gelöschte Zähl-Nr./ Deleted Consecutive Number
-	A-Merkmale / A-Characteristics	-
-	FK-Merkmale / FK-Characteristics	-
-	PK-Merkmale / PK-Characteristics	-

FR	120947	V5R19	PAPST		
SAP-Kratum/Stufe	Aend.-Nr./ Change-No.	CATIA-System-Version/ CATIA-System-Version	CAD-Umgebung/ CAD-Environment		
		NONADRIVE OPENRUN			
		3D-Referenzmodell / 3D-Reference-model			
		Datum	Name		
Toleranzierung / Tolerances: Size ISO 14405-D		Bearb./ Drawn:	17.02.2014	ECKMANN	
Allgemeintoleranzen / Gen. Tolerances: DIN ISO 2768-mK		Gepr./ Checked:	17.02.2014	ECKMANN	
		Freig./ Release:	20.02.2014	NUBER	

ebmpapst

ebm-papst St.Georgen GmbH & Co KG

Werkstoff / Material:				Volumen / Volume (berg):	454.373,028
				Gewicht / Mass (g):	0,473

Artikel / Title:

Radialgebläse RER133-41

Zchg.-Nr./ Drawing No.		Ers.f.Zchg. / Replaces:
9595420050		
Dokumenttyp / Type of Document	Teildokument (Blatt/Page)	Index / Index	Format / Size:	Massstab/Scale
C2D	002	B	A1	1:1

Vertraulich / Confidential Information 09.03.2018