R3G400-AC30-61

EC centrifugal fan

backward-curved, single-intake



ebm-papst Ventilator (Shanghai) Co.,Ltd.
No.418, Hua Jing Road, Pilot Free Trade Zone, Pudong District
Shanghai, China, 200131
Tel: +86(0)21-50460183
www.ebmpapst.com

Nominal data

Type	**R3G400-AC30-61**
Motor	**M3G084-FA**

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min^{-1}	1350
Power consumption	W	350
Current draw	A	1.52
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	30

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	63.1	46.7
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		78.4	62
05 Variable speed drive		Yes	

09 Power consumption P_{ed}	kW	0.35
09 Air flow q_v	m^3/h	2380
09 Pressure increase p_{fs}	Pa	299
10 Speed (rpm) n	min^{-1}	1350
11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = 1 + p_{fs} / 100 000 Pa

LU-13785-1

EC centrifugal fan

backward-curved, single-intake

Technical description


Weight	5.7 kg
Size	400 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display: reversible voltage output 0 V / +15 V - Integrated PID controller - Motor current limitation - PFC, active - RS-485 ebmBUS - Soft start - Control interface with SELV potential safely disconnected from supply - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CCC; UL1004-3 + 60730-1; CSA C22.2 No.77

ebm-papst Ventilator (Shanghai) Co.,Ltd. • No.418, Huajing Road, PilotFree Trade Zone, Pudong District, Shanghai, China, 200131 • Phone +86(0)21-50460183 • www.ebmpapst.com

EC centrifugal fan

backward-curved, single-intake

Product drawing

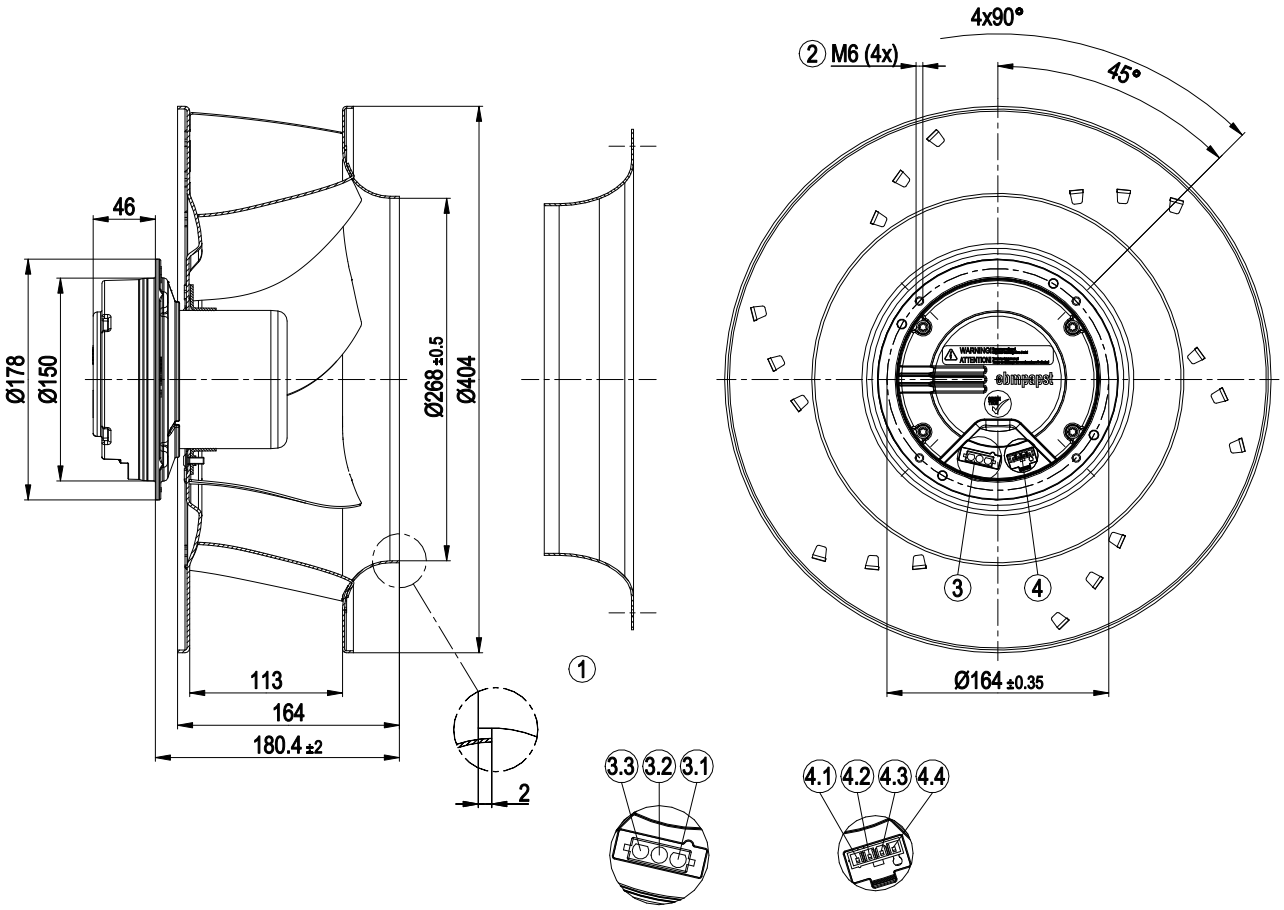


1	Accessory part: inlet ring 54476-2-4013 not included in scope of delivery
2	Max. clearance for screw 10 mm
3	3-pole header Lonco C63502-3A, mating connector with sockets not included in scope of delivery
3.1	L
3.2	N
3.3	PE
4	4-pole header Molex 39-30-2040, mating connector with sockets not included in scope of delivery
4.1	RSB
4.2	RSA
4.3	+15 V; in case of fault: 0 V
4.4	0 V; in case of fault: +15 V

ebm-papst Ventilator (Shanghai) Co.,Ltd. • No.418, Huajing Road, PilotFree Trade Zone, Pudong District, Shanghai, China, 200131 • Phone +86(0)21-50460183 • www.ebmpapst.com

EC centrifugal fan

backward-curved, single-intake

Accessory part

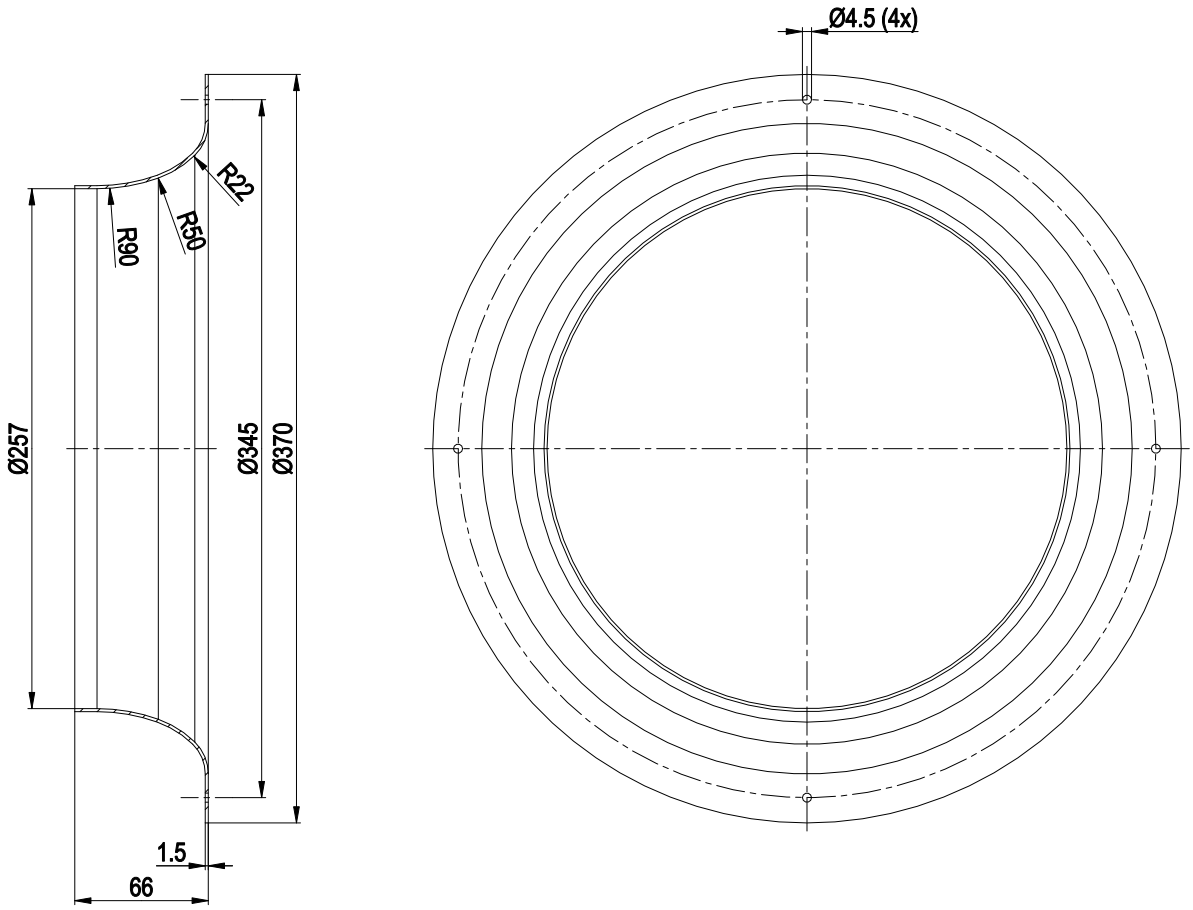


Inlet ring 54476-2-4013 not included in scope of delivery

ebm-papst Ventilator (Shanghai) Co.,Ltd. • No.418, Huajing Road, PilotFree Trade Zone, Pudong District, Shanghai, China, 200131 • Phone +86(0)21-50460183 • www.ebmpapst.com

EC centrifugal fan

backward-curved, single-intake

Connection diagram

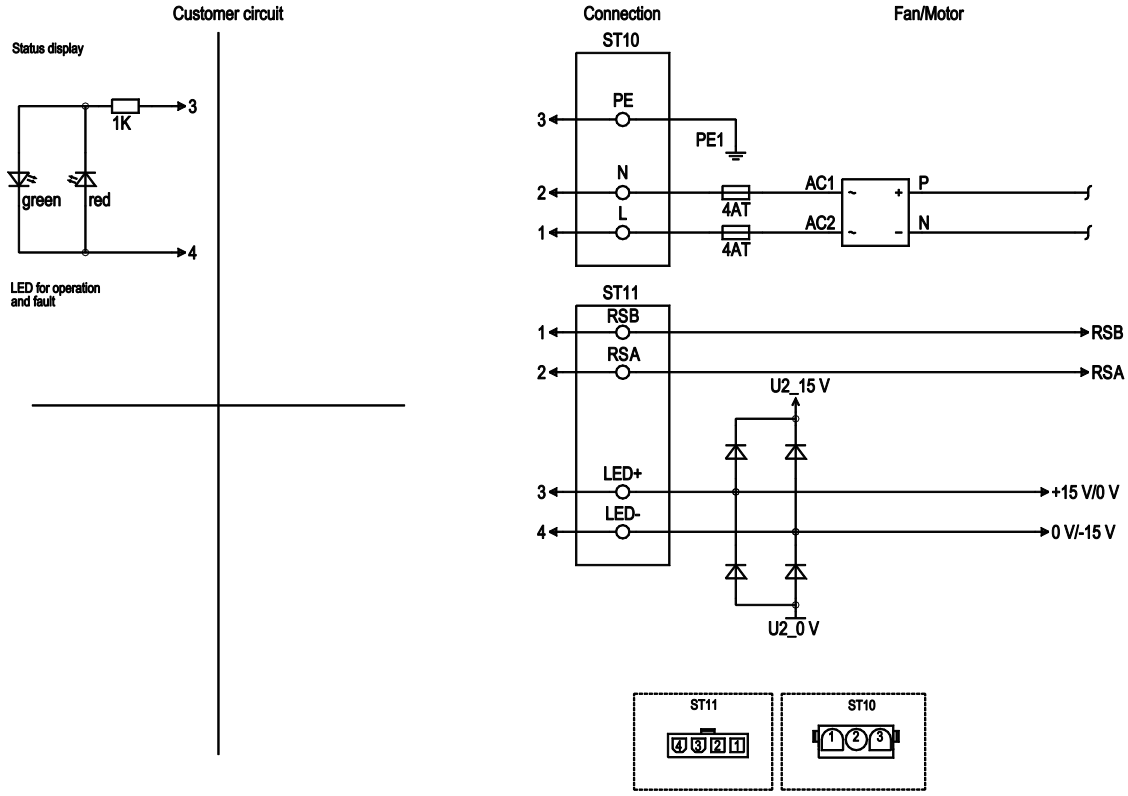


No.	Conn.	Designation	Color	Function/assignment
10	1	L		Power supply, phase, 50/60 Hz
10	2	N		Power supply, neutral conductor, 50/60 Hz
10	3	PE		Protective earth
11	1	RSB		RS-485 interface for ebmBus, RSB; SELV
11	2	RSA		RS-485 interface for ebmBus, RSA; SELV
11	3	LED +		Voltage output 15 V (+15%/-10%), max. 30 mA, power supply for external devices (e.g. status display for LED), SELV
11	4	LED -		Reference ground for control interface, SELV

EC centrifugal fan

backward-curved, single-intake

Curves: Air performance 50 Hz

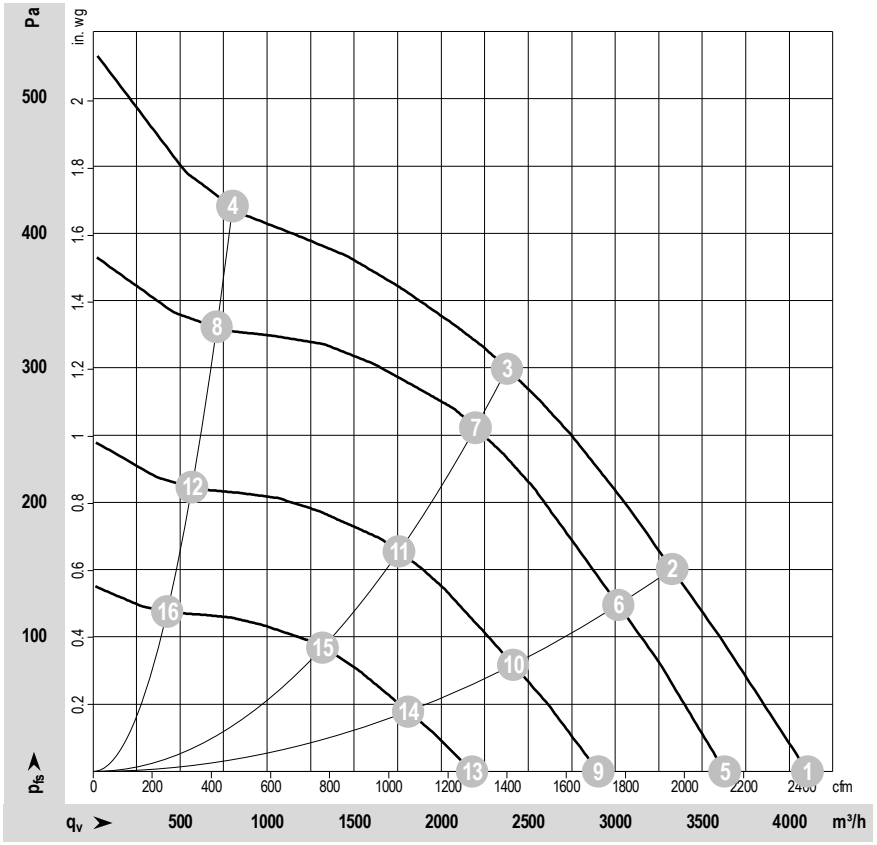

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-13785-2

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Fan Performance

	Wired	U	f	n	P_{ed}	I	q_V	p_{fs}	q_V	p_{fs}
		V	Hz	min^{-1}	W	A	m^3/h	Pa	cfm	in.wg
1	1~	230	50	1415	270	1.18	4100	0	2413	0.00
2	1~	230	50	1380	320	1.39	3325	150	1957	0.60
3	1~	230	50	1350	350	1.52	2380	300	1401	1.20
4	1~	230	50	1410	280	1.21	800	420	471	1.69
5	1~	230	50	1250	187	0.82	3628	0	2135	0.00
6	1~	230	50	1250	237	1.03	3017	124	1776	0.50
7	1~	230	50	1250	276	1.2	2196	256	1293	1.03
8	1~	230	50	1250	194	0.85	710	330	418	1.32
9	1~	230	50	1000	96	0.42	2903	0	1709	0.00
10	1~	230	50	1000	121	0.53	2414	79	1421	0.32
11	1~	230	50	1000	141	0.61	1757	164	1034	0.66
12	1~	230	50	1000	99	0.43	568	211	334	0.85
13	1~	230	50	750	40	0.18	2177	0	1281	0.00
14	1~	230	50	750	51	0.22	1810	45	1065	0.18
15	1~	230	50	750	60	0.26	1318	92	776	0.37
16	1~	230	50	750	42	0.18	426	119	251	0.48

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Ventilator (Shanghai) Co.,Ltd. • No.418, Huajing Road, PilotFree Trade Zone, Pudong District, Shanghai, China, 200131 • Phone +86(0)21-50460183 • www.ebmpapst.com