**K3G355-PH49-02**

# EC centrifugal module - RadiPac

backward curved, single inlet

with support bracket

**ebm-papst Mulfingen GmbH & Co. KG**
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

## Nominal data

| | |
|---|---|
| **Type** | **K3G355-PH49-02** |
| **Motor** | **M3G112-GA** |

| | | |
|---|---|---|
| Phase | | 3~ |
| Nominal voltage | VAC | 400 |
| Nominal voltage range | VAC | 380 .. 480 |
| Frequency | Hz | 50/60 |
| Type of data definition | | ml |
| Speed (rpm) | $min^{-1}$ | 2870 |
| Power input | W | 1900 |
| Current draw | A | 3 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 55 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

## Data in accordance with ecodesign regulation EU 327/2011 (prEN 17166)

| | | Actual | Request 2015 |
|---|---|---|---|
| 01 Overall efficiency $\eta_{es}$ | % | 68.8 | 54.4 |
| 02 Measurement category | | A | |
| 03 Efficiency category | | Static | |
| 04 Efficiency grade N | | 76.4 | 62 |
| 05 Variable speed drive | | Yes | |

| | | |
|---|---|---|
| 09 Power input $P_{ed}$ | kW | 1.89 |
| 09 Air flow $q_v$ | $m^3/h$ | 4470 |
| 09 Pressure increase $p_{fs}$ | Pa | 991 |
| 10 Speed (rpm) n | $min^{-1}$ | 2895 |
| 11 Specific ratio* | | 1.01 |

Data definition with optimum efficiency.

* Specific ratio = 1 + $p_{fs}$ / 100 000 Pa

LU-174051

The indicated efficiency values for obtaining conformity with the Ecodesign Directive EU 327/2011 were achieved with defined air conduction components (e.g. inlet nozzles).
The dimensions are to be requested from ebm-papst. If other air guide geometries are used on the installation side, the ebm-papst evaluation loses its validity/conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2(2a) (motors completely integrated into a product).

# EC centrifugal module - RadiPac

backward curved, single inlet

with support bracket

## Technical features

| | |
|---|---|
| **Mass** | 24.9 kg |
| **Size** | 355 mm |
| **Motor size** | 112 |
| **Surface of rotor** | Coated in black |
| **Material of electronics housing** | Die-cast aluminium |
| **Material of impeller** | Aluminium sheet |
| **Material of mounting plate** | Sheet steel, galvanised |
| **Material of support bracket** | Steel, coated in black |
| **Number of blades** | 5 |
| **Direction of rotation** | Clockwise, seen on rotor |
| **Type of protection** | IP54 |
| **Insulation class** | "B" |
| **Humidity (F) / environmental protection class (H)** | H1 |
| **Max. permissible ambient motor temp. (transp./ storage)** | +80 °C |
| **Min. permissible ambient motor temp. (transp./storage)** | -40 °C |
| **Mounting position** | See key to the product drawing |
| **Condensation drainage holes** | Rotor-side |
| **Operation mode** | S1 |
| **Motor bearing** | Ball bearing |
| **Technical features** | - Output 10 VDC, max. 10 mA<br>- Output 20 VDC, max. 50 mA<br>- Output for slave 0-10 V<br>- Operation and alarm display<br>- Input for sensor 0-10 V or 4-20 mA<br>- External 24 V input (programming)<br>- External release input<br>- Alarm relay<br>- Integrated PID controller<br>- Output limit<br>- Motor current limit<br>- PFC, passive<br>- RS485 MODBUS RTU<br>- Soft start<br>- Control input 0-10 VDC / PWM<br>- Control interface with SELV potential safely disconnected from the mains<br>- Over-temperature protected electronics / motor<br>- Line undervoltage / phase failure detection |
| **EMC interference immunity** | Acc. to EN 61000-6-2 (industrial environment) |
| **EMC interference emission** | Acc. to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used devices with a total rated power greater than 1 kW |
| **Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)** | <= 3.5 mA |
| **Electrical connection** | Terminal box |
| **Motor protection** | Thermal overload protector (TOP) wired internally |



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC centrifugal module - RadiPac

backward curved, single inlet

with support bracket

| | |
|---|---|
| **Safety classification** | I; If a protective earth is connected by the customer<br>This component to be built-in can have several local protection class ratings. The specification refers to the basic design of this component.<br>The final protection class is based on the intended installation and connection of the component. |
| **Product conforming to standard** | EN 61800-5-1; CE |
| **Approval** | CSA C22.2 no. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1 |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC centrifugal module - RadiPac

backward curved, single inlet

with support bracket

## Product drawing

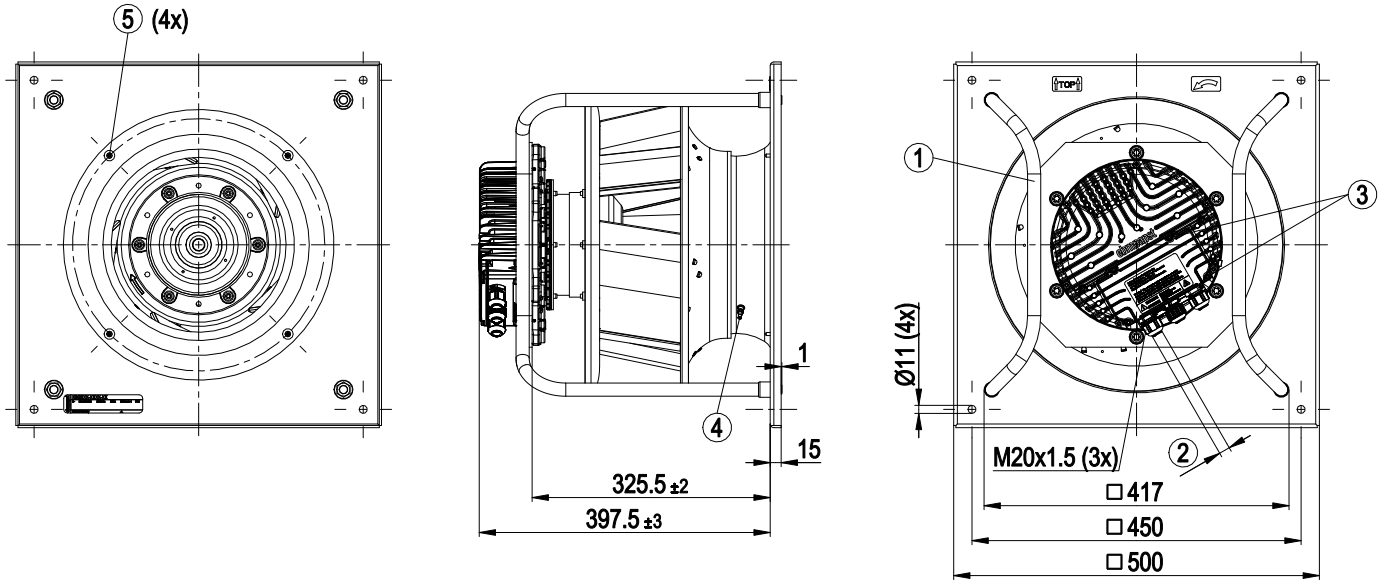


| | |
|---|---|
| 1 | Installation position: Shaft horizontal (install the support struts only vertically as shown in the illustration!) or rotor on bottom; rotor on top on request |
| 2 | Cable diameter min. 4 mm, max. 10 mm, tightening torque 4±0.6 Nm |
| 3 | Tightening torque 3.5±0.5 Nm |
| 4 | Inlet nozzle with pressure tap (k-factor: 148) |
| 5 | Attachment holes for inlet nozzle and FlowGrid (00400-2-2957 not included in scope of delivery) |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC centrifugal module - RadiPac

backward curved, single inlet

with support bracket

## Connection screen

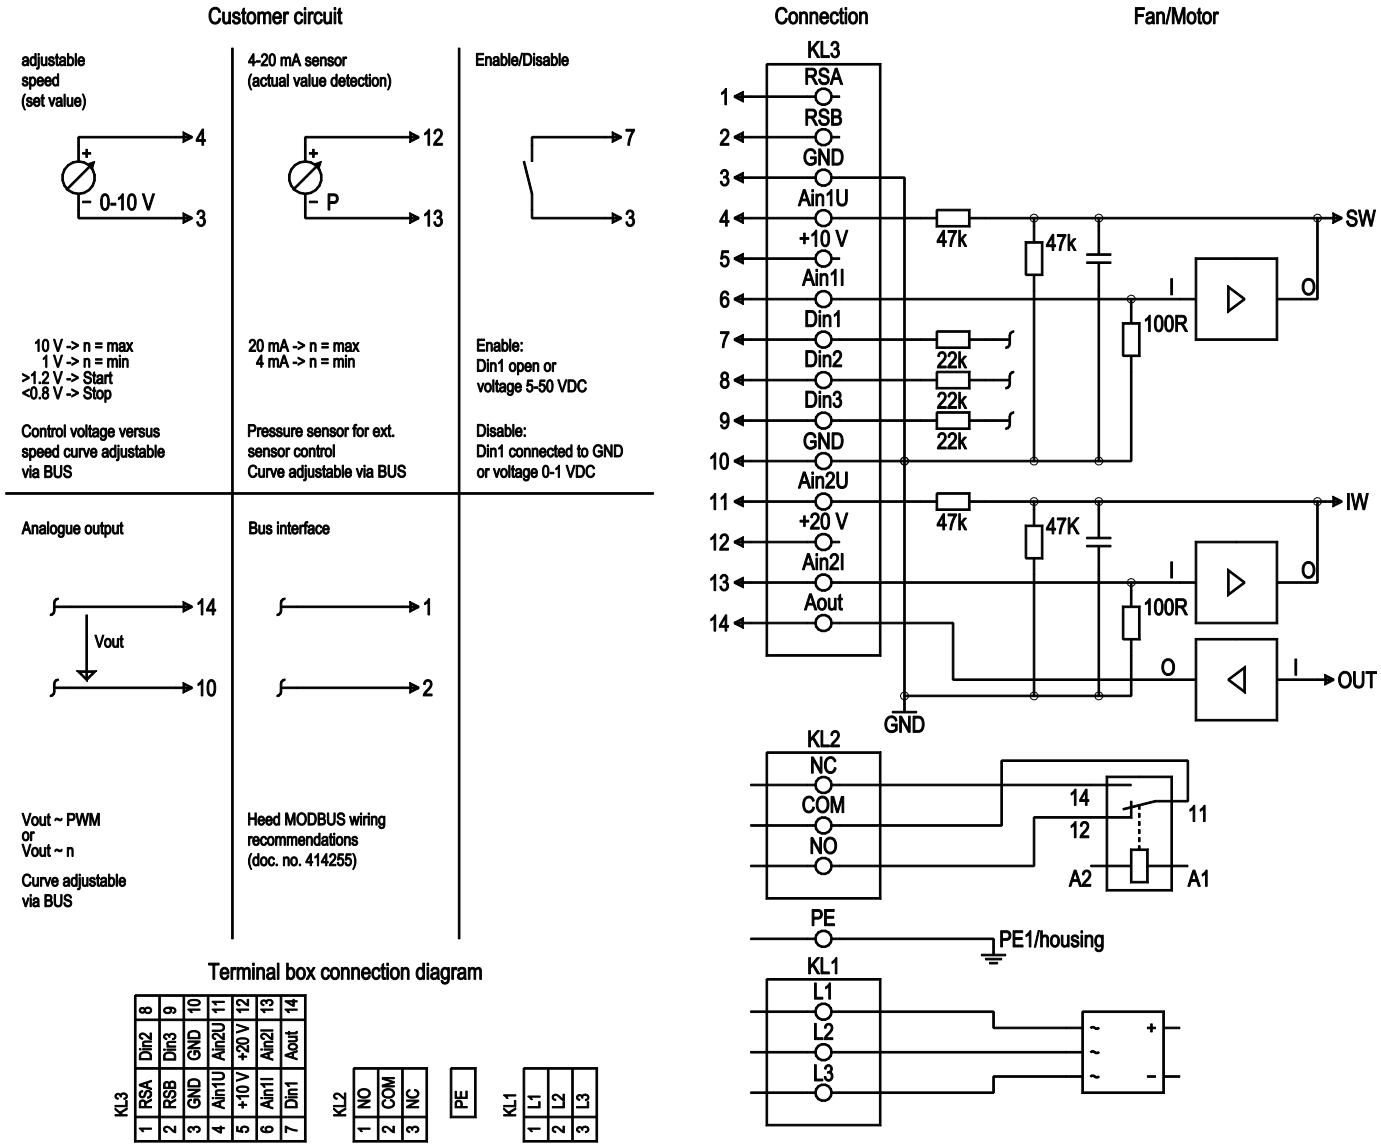


| No. | Conn. | Designation | Function / assignment |
|---|---|---|---|
| KL 1 | 1 | L1 | Mains connection, power supply; see technical data for nominal voltage range |
| KL 1 | 2 | L2 | Mains connection, power supply; see technical data for nominal voltage range |
| KL 1 | 3 | L3 | Mains connection, power supply; see technical data for nominal voltage range |
| PE | | PE | Earth connection, PE connection |
| KL 2 | 1 | NO | Status relay, floating status contact, make for failure |
| KL2 | 2 | COM | Status relay, floating status contact, changeover contact, common connection; contact rating 30 VAC/max. 2 A (AC1)/min. 10 mA |
| KL2 | 3 | NC | Status relay, floating status contact, break for failure |
| KL 3 | 1 | RSA | Bus connection RS-485, RSA, MODBUS RTU; SELV |
| KL 3 | 2 | RSB | Bus connection RS-485, RSB, MODBUS RTU; SELV |
| KL 3 | 3 / 10 | GND | Reference ground for control interface; SELV |
| KL 3 | 4 | Ain1 U | Analogue input 1, set value: 0-10 V, Ri = 100 kΩ, parametrisable curve, only for use as alternative to input Ain1; SELV |



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

| No. | Conn. | Designation | Function / assignment |
|---|---|---|---|
| KL 3 | 5 | + 10 V | Fixed voltage output 10 VDC, +10 V +/- 3%, max. 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometer); SELV |
| KL 3 | 6 | Ain1 I | Analogue input 1, set value: 4-20 mA; Ri = 100 Ω, parametrisable curve, only for use as alternative to input Ain1 U; SELV |
| KL 3 | 7 | Din1 | Digital input 1: Enabling of electronics,<br>Enabling: Pin open or applied voltage 5-50 VDC<br>Disabling: Bridge to GND or applied voltage <1 VDC<br>Reset function: Triggers software reset after a level change to <1 VDC; SELV |
| KL 3 | 8 | Din2 | Digital input 2: Parameter set 1/2 switching, depending on EEPROM setting, the valid/used parameter set can be selected via the bus or via the digital input DIN2.<br>Parameter set 1: Pin open or applied voltage 5-50 VDC<br>Parameter set 2: bridge to GND or applied voltage <1 VDC; SELV |
| KL 3 | 9 | Din3 | Digital input 3: Controller function of integrated controller, depending on EEPROM setting, the controller function of the integrated controller can be selected via the bus or the digital input Din 3<br>normal: pin open or applied voltage 5-50 VDC<br>inverse: bridge to GND or applied voltage <1 VDC; SELV |
| KL 3 | 11 | Ain2 U | Analogue input 2, actual value: 0-10 V, Ri = 100 kΩ, parametrisable curve, only usable as alternative to input Ain2; SELV |
| KL 3 | 12 | + 20 V | Fixed voltage output 20 VDC, +20 V +25/-10%, max. 50 mA, short-circuit-proof, power supply for ext. devices (e.g. sensors); SELV<br>Alternatively: +24 VDC input for parametrisation without mains power |
| KL 3 | 13 | Ain2 I | Analogue input 2, actual value: 4-20 mA, Ri = 100 Ω, parametrisable curve, only for use as alternative to input Ain2 U; SELV |
| KL 3 | 14 | Aout | Analogue output 0-10 VDC, max. 5 mA, output of the current motor level control coefficient / motor speed parametrisable curve; SELV |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC centrifugal module - RadiPac

backward curved, single inlet

with support bracket

## Charts: Air flow 50 Hz

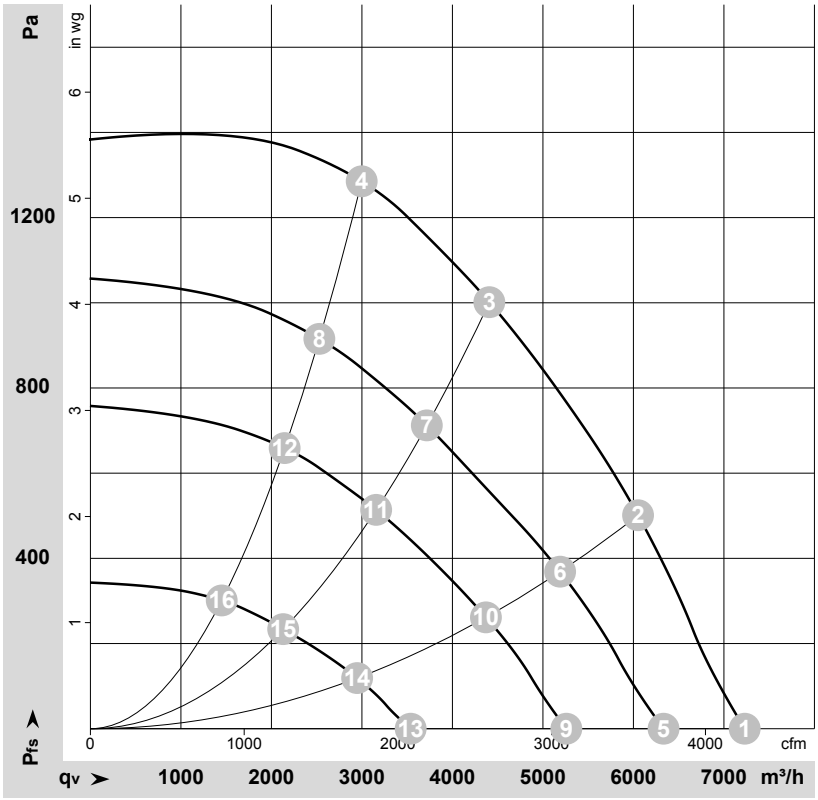


ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-174051-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

| | U | f | n | $P_{ed}$ | I | $LpA_{in}$ | $LwA_{in}$ | $LwA_{out}$ | $q_V$ | $p_{fs}$ | $q_V$ | $p_{fs}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | V | Hz | $min^{-1}$ | W | A | dB(A) | dB(A) | dB(A) | $m^3/h$ | Pa | cfm | in. wg |
| 1 | 400 | 50 | 2870 | 1046 | 1.69 | 85 | 92 | 94 | 7230 | 0 | 4255 | 0.00 |
| 2 | 400 | 50 | 2870 | 1580 | 2.46 | 77 | 85 | 89 | 6050 | 500 | 3560 | 2.01 |
| 3 | 400 | 50 | 2870 | 1900 | 3.00 | 73 | 81 | 86 | 4410 | 1000 | 2595 | 4.01 |
| 4 | 400 | 50 | 2870 | 1887 | 2.92 | 79 | 86 | 89 | 3000 | 1300 | 1765 | 5.22 |
| 5 | 400 | 50 | 2540 | 735 | 1.25 | 81 | 88 | 91 | 6335 | 0 | 3725 | 0.00 |
| 6 | 400 | 50 | 2480 | 1024 | 1.65 | 73 | 81 | 85 | 5190 | 370 | 3055 | 1.49 |
| 7 | 400 | 50 | 2440 | 1156 | 1.84 | 70 | 77 | 82 | 3715 | 714 | 2190 | 2.87 |
| 8 | 400 | 50 | 2440 | 1142 | 1.82 | 75 | 81 | 85 | 2530 | 923 | 1490 | 3.71 |
| 9 | 400 | 50 | 2130 | 468 | 0.88 | 77 | 85 | 87 | 5260 | 0 | 3095 | 0.00 |
| 10 | 400 | 50 | 2090 | 649 | 1.14 | 70 | 78 | 82 | 4370 | 262 | 2570 | 1.05 |
| 11 | 400 | 50 | 2070 | 738 | 1.25 | 66 | 73 | 79 | 3155 | 515 | 1860 | 2.07 |
| 12 | 400 | 50 | 2070 | 737 | 1.25 | 71 | 77 | 81 | 2145 | 665 | 1265 | 2.67 |
| 13 | 400 | 50 | 1440 | 179 | 0.41 | 65 | 75 | 76 | 3540 | 0 | 2085 | 0.00 |
| 14 | 400 | 50 | 1415 | 232 | 0.50 | 60 | 68 | 73 | 2945 | 119 | 1735 | 0.48 |
| 15 | 400 | 50 | 1400 | 260 | 0.54 | 57 | 65 | 70 | 2130 | 234 | 1255 | 0.94 |
| 16 | 400 | 50 | 1400 | 262 | 0.54 | 60 | 67 | 72 | 1450 | 304 | 855 | 1.22 |

U = Supply voltage · f = Frequency · n = Speed (rpm) · $P_{ed}$ = Power input · I = Current draw · $LpA_{in}$ = Sound pressure level inlet side · $LwA_{in}$ = Sound power level inlet side · $LwA_{out}$ = Sound power level outlet side
$q_V$ = Air flow · $p_{fs}$ = Pressure increase



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com