Preliminary Product Data Sheet 4114N/2HHP-365

ebmpapst

The engineer's choice



GREEN TECH

4114N/2HHP-365

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 4

3.1 Electrical Interface - Input 4
3.2 Electrical Operating Data 5
3.3 Electrical Interface - Output 6
3.4 Electrical Features 7
3.5 Aerodynamics 8
3.6 Sound Data 9

4 Environment 9

4.1 General 9
4.2 Climatic Requirements 9

5 Safety 10

5.1 Electrical Safety 10
5.2 Approval Tests 10

6 Reliability 10

6.1 General 10

1 General

Fan type	Fan	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air intake over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	

2 Mechanics


2.1 General

Width	119,0 mm	
Height	119,0 mm	
Depth	38,0 mm	
Mass	0,390 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	Wire outlet corner: 420 Ncm Remaining corners: 600 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires - Plug	
Lead wire length Tolerance	See drawing	
Wire size (AWG)	22	
Insulation diameter	1,70 mm	
Plug	See drawing	
Contact	See drawing	



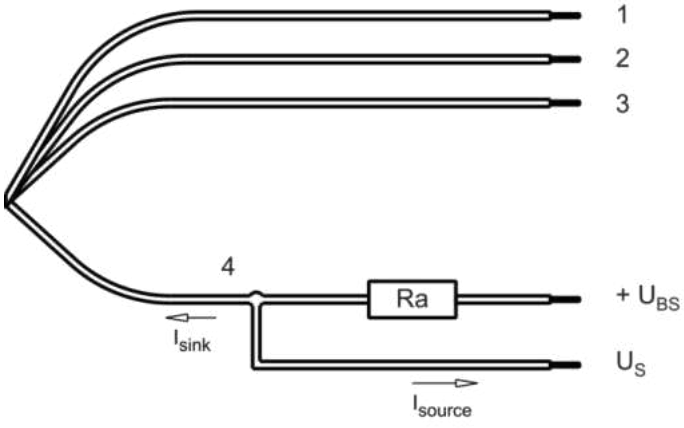

Wire	Color	Operation
1	red	+ UB
2	white	Tacho
3	violet	PWM
4	blue	- GND

The auxilliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

3 Operating Data


3.1 Electrical Interface - Input

Control input	PWM


Features

Inpute type	Open collector	
PWM - Frequency		1 kHz - 10 kHz typical: 2 kHz

Characteristics

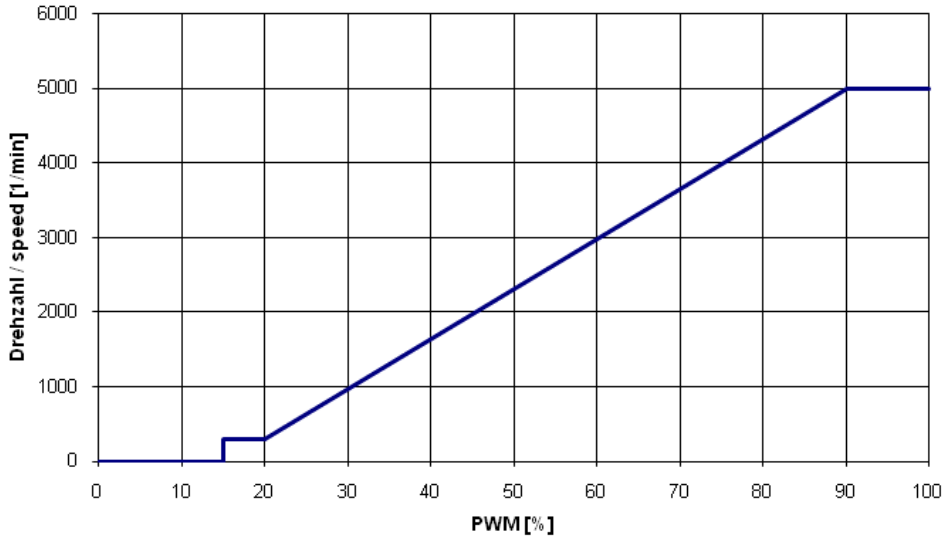

Schematics

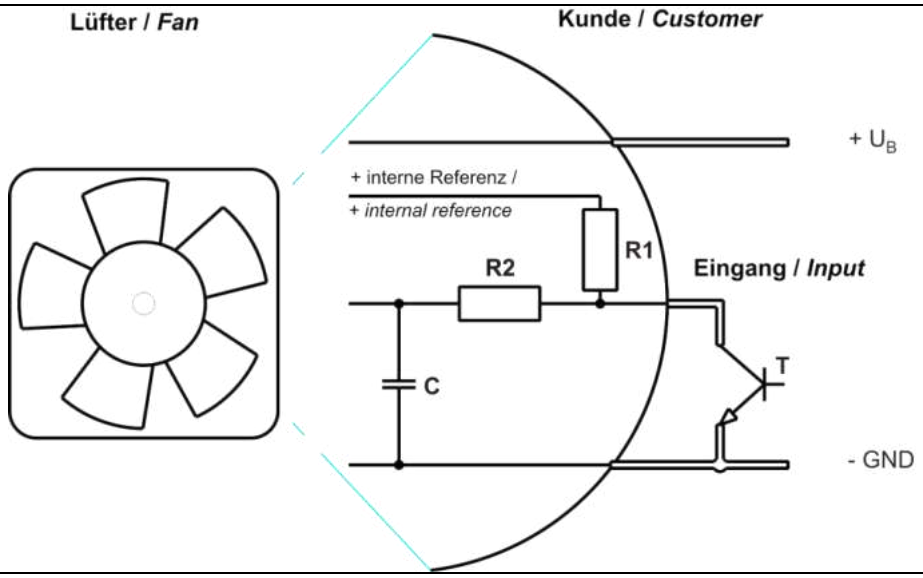

Speed control:
By pulse width modulation (PWM) 0...100%
Open collector in relation to signal-ground.
The shown pull-up resistor R1 to the internal reference voltage (+5V) has 4.7kOhm.

Transistor requirements:
Vce max. >= 12V; Isink max. >=5mA; Vce sat. <= 0,15V

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

Δp = 0: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Name	Condition		
PWM 0001	PWM: 95 %; f: 2 kHz		


Note:

The internal electrolytic capacitor 120uF/50V has no resistor or inrush current limitation, essentially the power supply and the type and length of the connecting cable is limiting the Inrush current.


Features	Condition	Symbol	Values		
Voltage range		U	16 V		30 V
Nominal voltage		U_N		24 V	
Power consumption Tolerance	Δp = 0 PWM 0010	P	5,6 W +- 15 %	13 W +- 10 %	14,8 W +- 10 %
Current consumption Tolerance	Δp = 0 PWM 0010	I	350 mA +- 15 %	500 mA +- 10 %	495 mA +- 10 %
Speed Tolerance	Δp = 0 PWM 0010	n	3.700 1/min +- 10 %	5.000 1/min +- 5 %	5.000 1/min +- 5 %
Starting current consumption				< 1.600 mA	

3.3 Electrical Interface - Output

Tacho type	/2 (open collector)

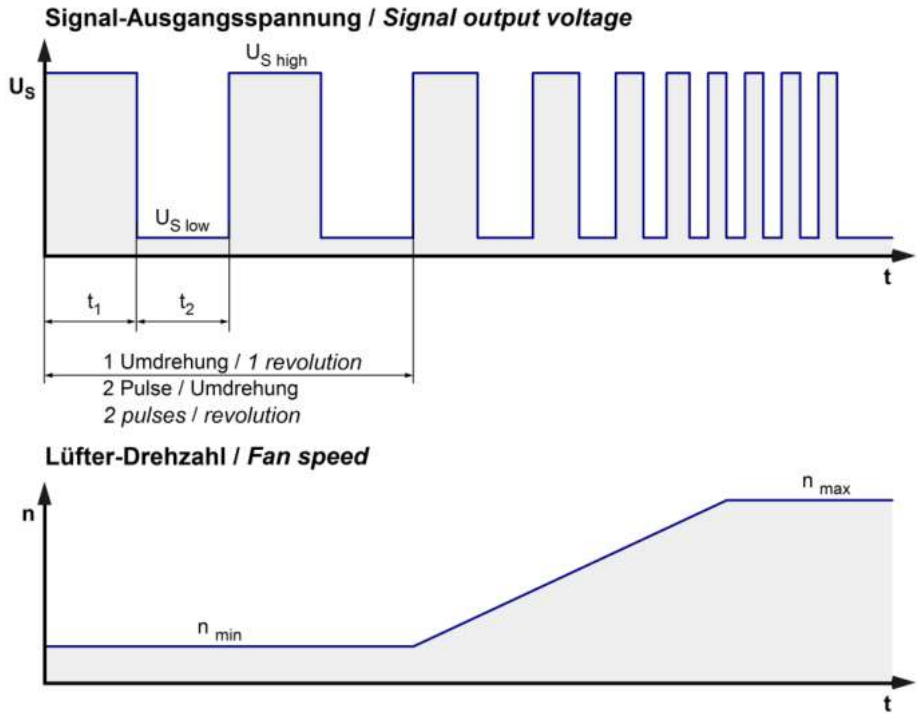

$$Ra = \frac{U_{BS} - U_{S\,low}}{I_{sink}}$$

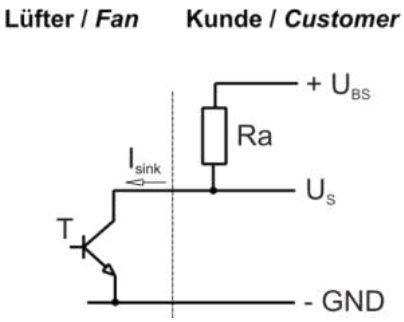


Features		Note	Values
Tacho operating voltage	U_{BS}		<= 60 V
Tacho signal Low	$U_{S\,low}$	I sink: 2 mA	<= 0,4 V
Tacho signal High	$U_{S\,high}$	I source: 0 mA	<=60 V
Maximum sink current	I_{sink}		20 mA
External resistor		External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency		(2 x n) / 60	167 Hz @ 5.000 1/min
Tacho isolated from motor		No	
Slew rate			=> 0,5 V/us

n = revolutions per minute (1/min)

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at U_N	Rectifying diode I_F <= 10 mA	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 1.000 mA	
Clock signal at locked rotor	t_3 / t_4 typical: 0,5 s / 5,0 s	
Internal fuse	Littelfuse NANO2 > Very Fast-Acting > 451/453 Series 3A / 125V (Art.No.: 0451003.MRL)	

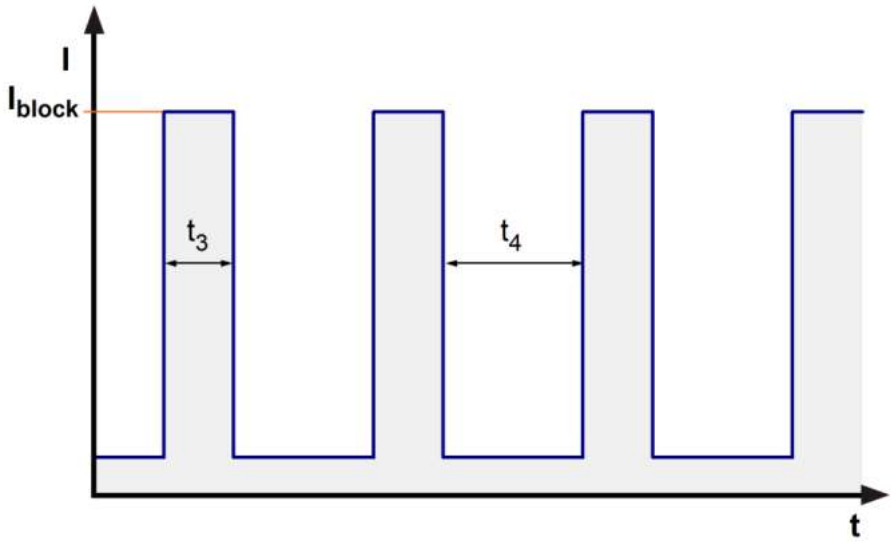

Current during braking of the rotor
Max. current when decelerate at Unom. = < 1.600 mA peak


3.5 Aerodynamics

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

5.000 1/min at free air flow	PWM 95 %; f: 2 kHz		

Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)	260 m3/h	
Max. static pressure (Δp = max. / $\dot{V}$ =0)	250 Pa	

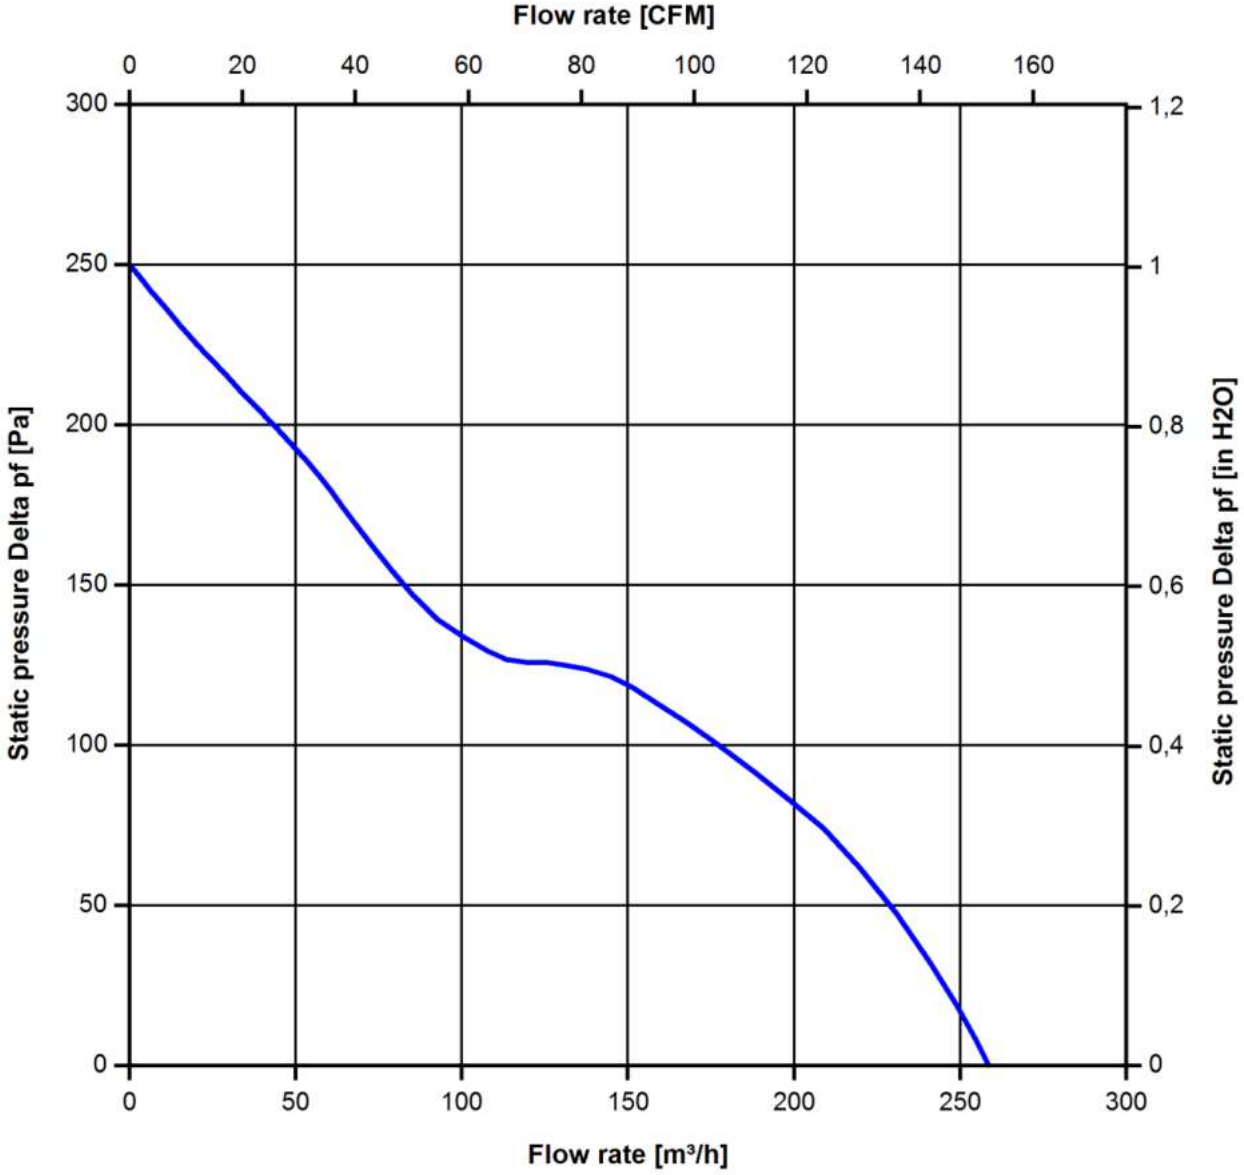

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

5.000 1/min at free air flow	PWM 95 %; f: 2 kHz	PWM min.:	PWM max.:

Optimal operating point	160 m3/h @ 100 Pa	
Sound power level at the optimal operating point	6,7 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	60,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

Permitted application area:
The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)
There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	III	

5.2 Approval Tests


CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Not applicable

6 Reliability


6.1 General

Life expectancy L10 at TU = 40 °C	70.000 h	
Life expectancy L10 at TU max.	40.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	117.500 h	


Steckergehäuse / plug housing
Molex 39-01-2046
Kontakte / contacts
Molex 39-00-0040

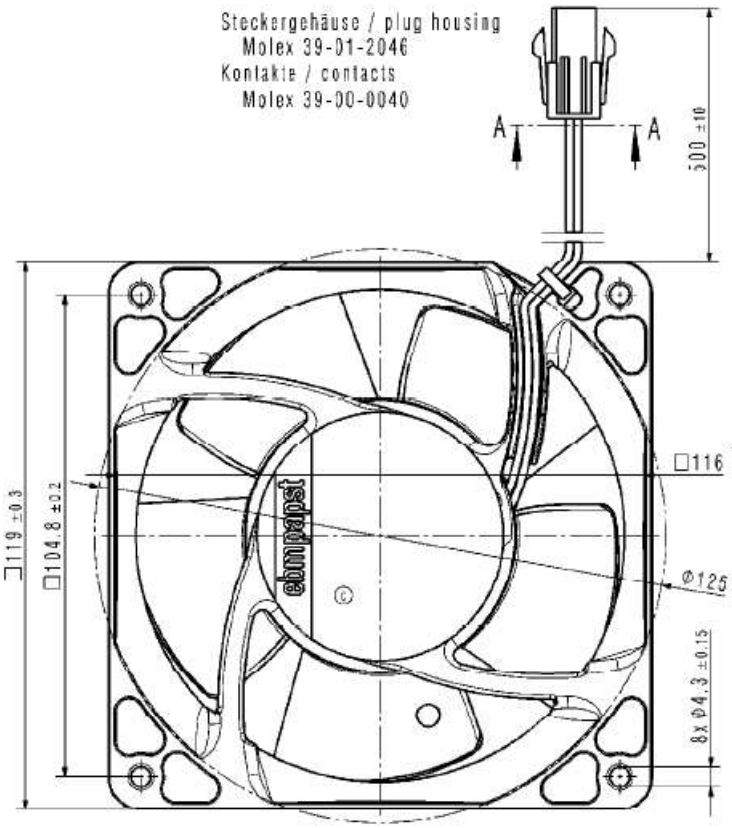


A-A 2:1



Steckerbelegung /
pin configuration:
1 = rot / red (+)
2 = weiß / white (Tacho)
3 = violett / violet (PWM)
4 = blau / blue (GND)

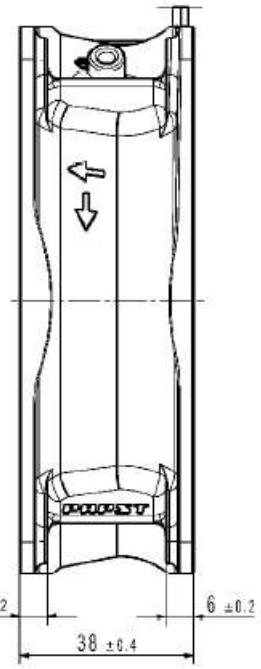

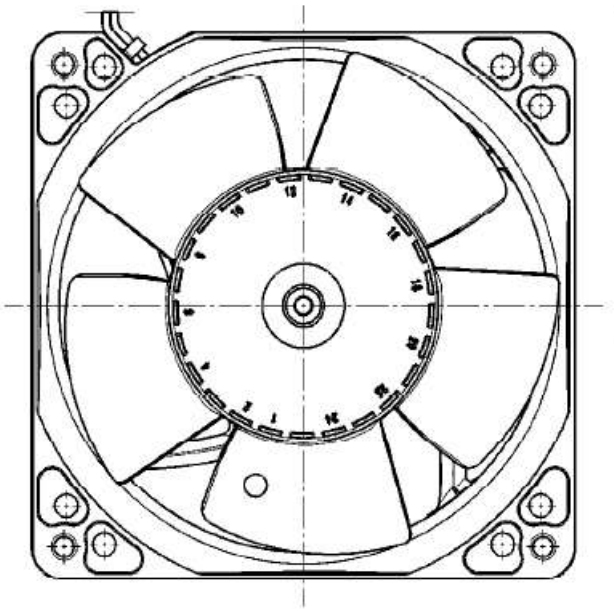

1) Maße für Montageausschnitt
- Axialspiel der Kugellager mit Feder spielfrei verspannt

1) measures for mounting cut-out
- ball bearing without axial clearance by a pre-loaded spring

SAP-Status/Stato	Änd.-Nr./ Change No.	CATIA-System-Version/ CATIA-System-Version	CAD-Ausgabe/ CAD-Ein(Ausfahrt)		Werkstoff / Material:		Maßstab / Scale:
							Gewicht / Mass: kg
		3D-Referenzmodell / 3D-Reference model			Artikel / Title:		
Toleranzen / Tolerances:		Datum	Name				
	Bearb. / Drawn						
Allgemeintoleranzen n. Ber. Toleranzen	Gepr. / Checked				Zchg.-Nr. / Drawing No.		Ers.f.Zchg. / Replaces:
	Freig. / Released						
ebmpapst					Dokumentart / Type of Document	Teil/Dokument (Multi-Page)	Index / Index	Format / Size:	Maßstab/Scale
ebm-papst St. Georgen GmbH & Co KG							

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.