
Copying of this document, and giving it to others and the use or communication of the contents there of, are forbidden without express authority of ebm-papst Mulfingen GmbH & Co. KG.
Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

CAD: 0065738
DISTRIBUTION: PG2

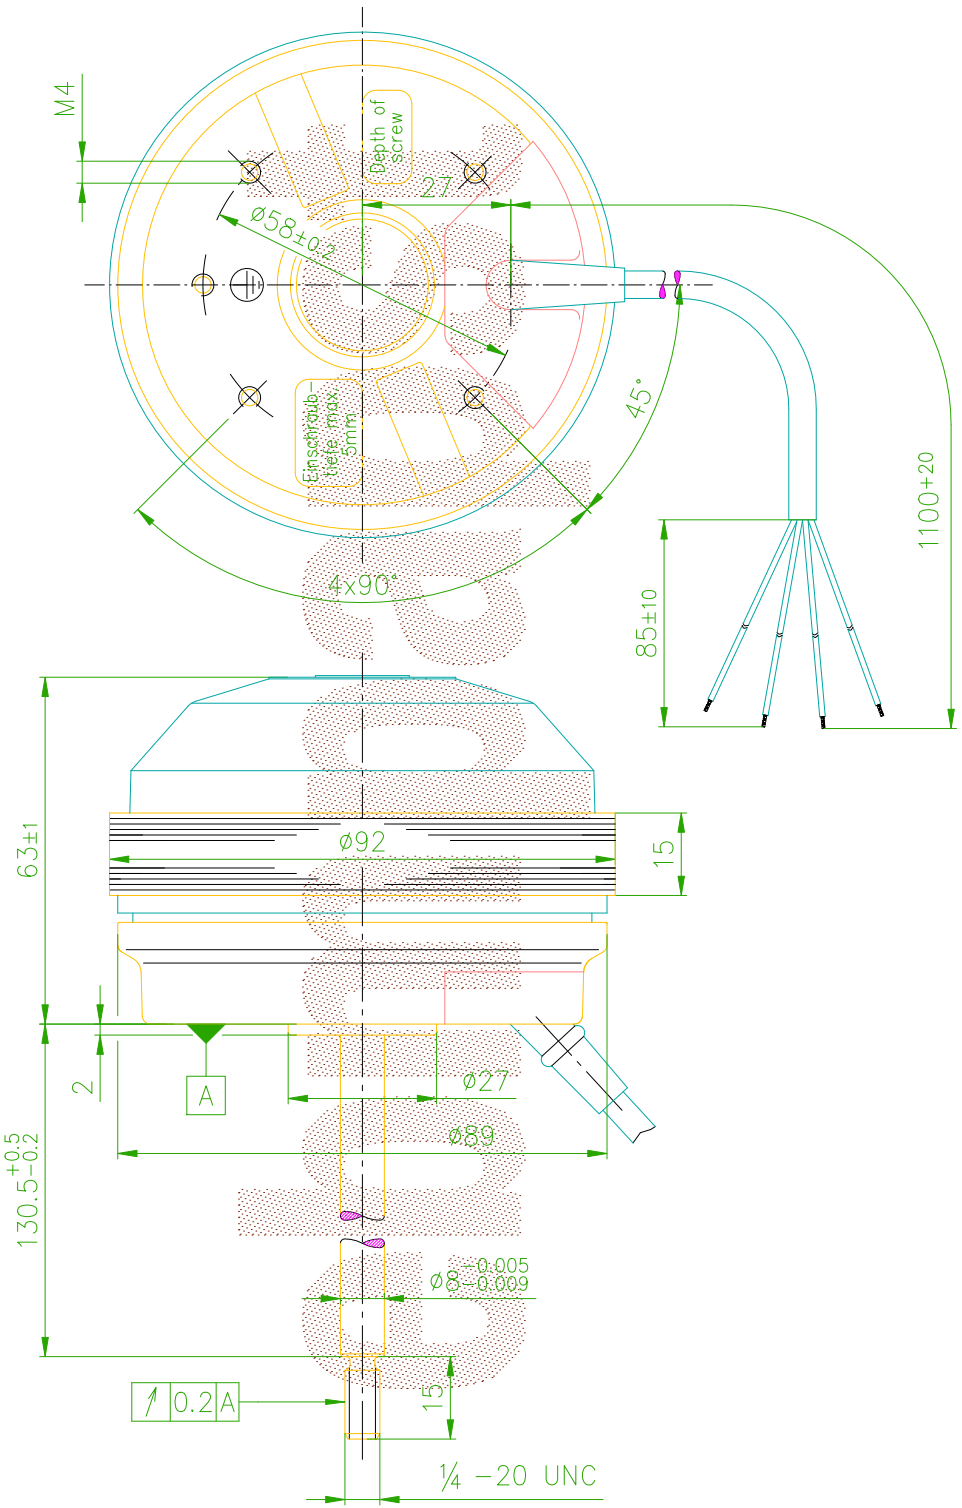

ebmpapst
ebm-papst Mulfingen GmbH & Co. KG

Delivery Specification

No. 10767

Unit: Motor | Type: M2E068-CF36-08

Motor: single phase motor | Customer:

Motor Type: M2E068-CF..-..

Type	voltage V	frequency Hz	power consumption W	power output W	current consumption A	air volume m³/h	static pressure Pa	speed min⁻¹			noise level dBA	capacitor µF	capacitor VDB
M2E068-CF36-08	240	50	38	16	0,17			2700				1	450

Winding layout No.: 1039 | Resistance:

Insulation class: B | Operating type:

Permissible ambient temperature: 60°C | △t= 60K at 1,1 UN and η max

Motor protection: thermocontact

Data plate: data stamped on rotor | Type: M2E068-CF36-08

240 V 50 Hz P1=38, P2=16 W 0,17 A- 2700 min⁻¹ 1 µF 450 VDB

High-voltage test according to EN 60335-1 with 1800 V

Electrical connection: 4G – jacketed flexible cable, 4 x 0,5mm² leads
all leads with brass lead tips

Material/surface treatment: rotor varnished in black,
stator moisture protected,
shaft: steel no. 1.4305 corrosion and acid proof

Bearings: ball bearings


Direction of rotation: clockwise | Looking at rotor side:

Airflow direction:

Balancing grade: fan balanced dynamically in two planes | Protection class: IP 44 in accordance with EN 60034-5

Mounting position: | Approx. weight per unit: kg

Wiring diagrams:



–	–	08.12.04	St																						

AutoCAD