D1G146-HQ03-04

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	**D1G146-HQ03-04**
Motor	**M1G055-DF**

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		fa
Speed (rpm)	min^{-1}	1675
Power consumption	W	170
Current draw	A	1.2
Min. back pressure	Pa	0
Min. back pressure	inH2O	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Technical description

Weight	1.9 kg
Fan size	146 mm
Impeller material	PP plastic
Housing material	PP plastic
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Motor current limitation - Soft start - PWM control input - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	Built-in component with basic insulation, protection class results from installation according to intended use
Conformity with standards	EN 60335-1; EN 60335-2-31; CE
Approval	EAC; VDE


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Product drawing

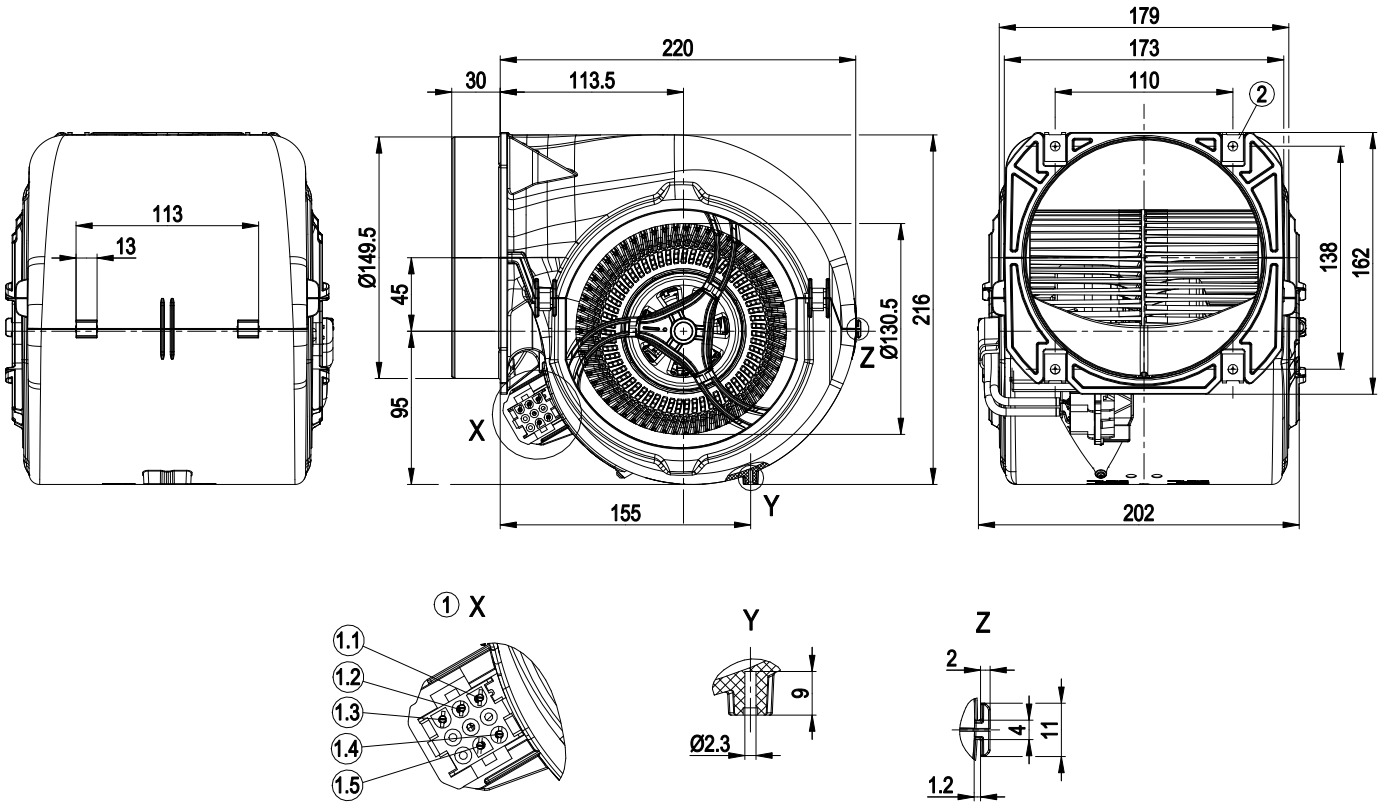

1	Coded plug system: 9-pole connector housing tyco 927231-7, 5x plug pin tyco 926887-1
	Mating connector (not included in scope of delivery): 9-pole connector housing tyco 1-1863003-2, socket tyco 926884-1
1.1	L (brown)
1.2	N (blue)
1.3	FE (green/yellow)
1.4	PWM (yellow)
1.5	GND (blue)
2	4x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus material thickness of mounting)

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com


EC centrifugal fan

forward-curved, dual-intake

with housing (flange)


Connection diagram

Customer circuit



Connection

Fan / Motor

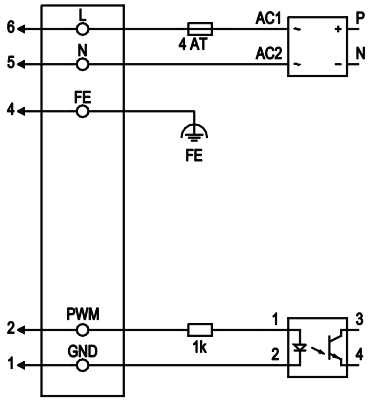

No.	Conn.	Designation	Color	Function/assignment
	6	L	brown	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	5	N	blue	Neutral conductor
	4	FE	green/yellow	Functional ground conductor
	2	PWM	yellow	Control input PWM, electrically isolated, Isink = 5-10 mA
	1	GND	blue	GND connection for control interface


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Curves: Air performance 50 Hz

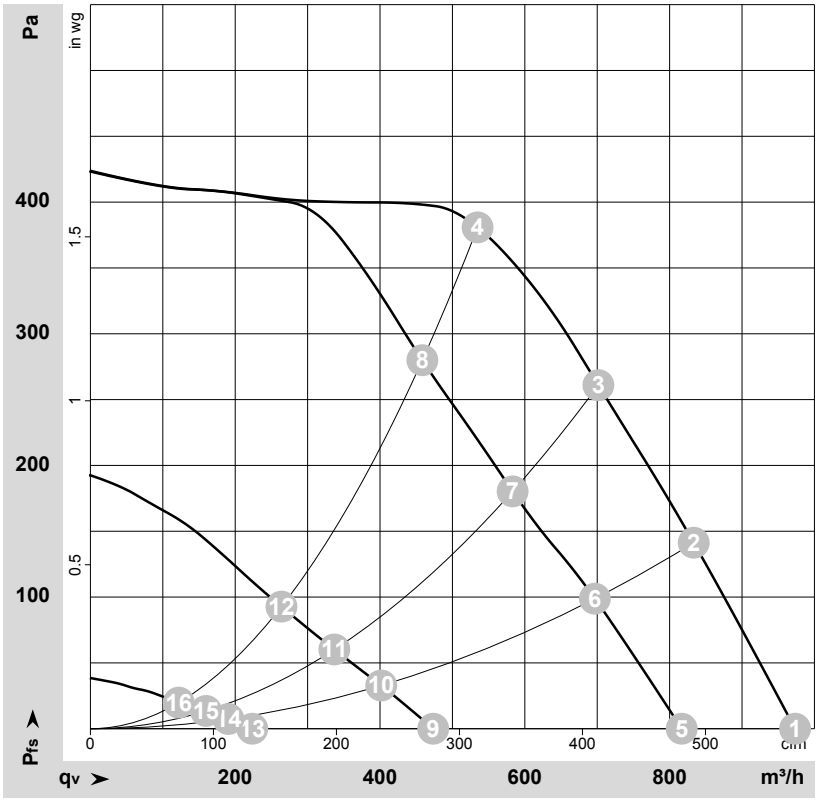

ρ = 1.178 kg/m³ ± 2 %

Measurement: LU-171114-1
Measurement: LU-171189-1
Measurement: LU-171191-1
Measurement: LU-171193-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P_{ed}	I	LpA_{in}	LwA_{in}	qv	p_{fs}	qv	p_{fs}
	V	Hz	min^{-1}	W	A	dB(A)	dB(A)	m^3/h	Pa	CFM	inH2O
1	230	50	1675	170	1.20	61	73	975	0	575	0.00
2	230	50	1970	170	1.20	61	72	835	140	490	0.56
3	230	50	2265	170	1.20	61	72	700	260	415	1.04
4	230	50	2570	150	1.10	61	72	535	380	315	1.53
5	230	50	1420	95	0.68			815	0	480	0.00
6	230	50	1665	94	0.68			695	99	410	0.40
7	230	50	1905	94	0.68			585	180	345	0.72
8	230	50	2215	94	0.68			460	279	270	1.12
9	230	50	865	21	0.16			475	0	280	0.00
10	230	50	1000	21	0.16			400	33	235	0.13
11	230	50	1130	21	0.16			335	60	200	0.24
12	230	50	1305	21	0.16			265	93	155	0.37
13	230	50	460	5.0	0.05			225	0	130	0.00
14	230	50	515	4.0	0.05			190	7	110	0.03
15	230	50	570	5.0	0.05			160	14	95	0.06
16	230	50	635	5.0	0.05			120	20	70	0.08

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
qv = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com