# AC axial fan

sickle-shaped blades (S series)

**ebm-papst Ventilator (Shanghai) Co.,Ltd.**
No.418, Hua Jing Road, Wai Gao Qiao Free Trade Zone, Pudong
Tel: +86(0)21-50460183
www.ebmpapst.com

## Nominal data

| | |
|---|---|
| **Type** | **S6E450-AF08-29/F01** |
| **Motor** | **M6E074-EI** |

| | | |
|---|---|---|
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Frequency | Hz | 50 |
| Method of obtaining data | | fa |
| Valid for approval/standard | | - |
| Speed (rpm) | $min^{-1}$ | 890 |
| Power consumption | W | 140 |
| Current draw | A | 0.62 |
| Capacitor | µF | 4 |
| Capacitor voltage | VDB | 450 |
| Capacitor standard | | P0 (CE) |
| Max. back pressure | Pa | 45 |
| Max. back pressure | inH2O | 0.18 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 40 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



ebmpapst

# AC axial fan

sickle-shaped blades (S series)


## Technical description

| | |
|---|---|
| **Weight** | 6 kg |
| **Fan size** | 450 mm |
| **Rotor surface** | Painted black |
| **Impeller material** | PP plastic |
| **Number of blades** | 3 |
| **Airflow direction** | "V" |
| **Direction of rotation** | Counterclockwise, viewed toward rotor |
| **Degree of protection** | IP44; installation- and position-dependent as per EN 60034-5 |
| **Insulation class** | "F" |
| **Moisture (F) / Environmental (H) protection class** | H0+ |
| **Max. permitted ambient temp. for motor (transport/storage)** | + 80 °C |
| **Min. permitted ambient temp. for motor (transport/storage)** | - 40 °C |
| **Installation position** | Shaft horizontal or rotor on bottom; rotor on top on request |
| **Condensation drainage holes** | On rotor side |
| **Mode** | S1 |
| **Motor bearing** | Ball bearing |
| **Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)** | < 0.75 mA |
| **Electrical hookup** | Prepared for terminal box installation |
| **Motor protection** | Thermal overload protector (TOP) internally connected |
| **With cable** | Variable |
| **Protection class** | I (with customer connection of protective earth) |
| **Conformity with standards** | EN 60335-1 |
| **Approval** | CCC |

# AC axial fan


sickle-shaped blades (S series)

## Product drawing

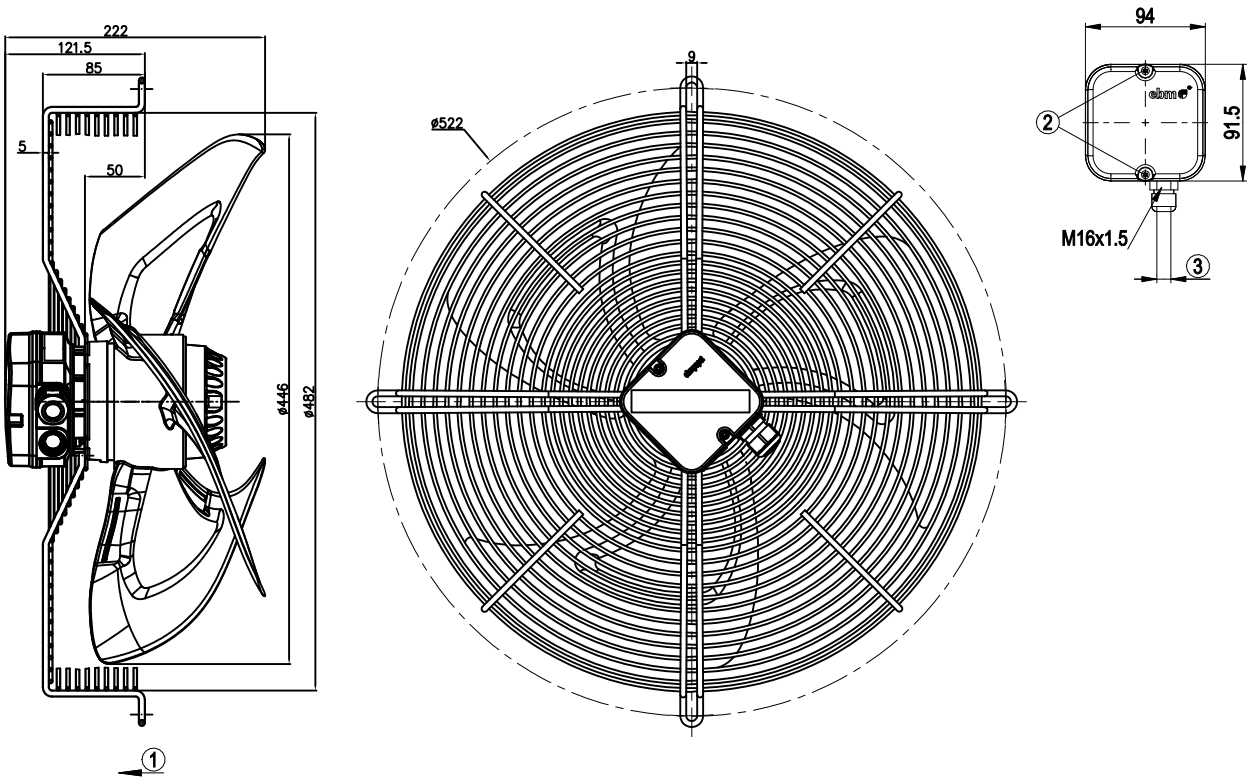


| | |
|---|---|
| 1 | Direction of air flow "V" |
| 2 | Tightening torque 1.5 ± 0.2 Nm |
| 3 | Cable diameter min. 3.5 mm, max. 10 mm; tightening torque 2.0 ± 0.3 Nm |

## Connection diagram




| | | | | | |
|---|---|---|---|---|---|
| U1 | blue | Z | brown | U2 | black |
| PE | green/yellow | | | | |




ebmpapst

# AC axial fan

sickle-shaped blades (S series)

## Curves: Air performance 50 Hz

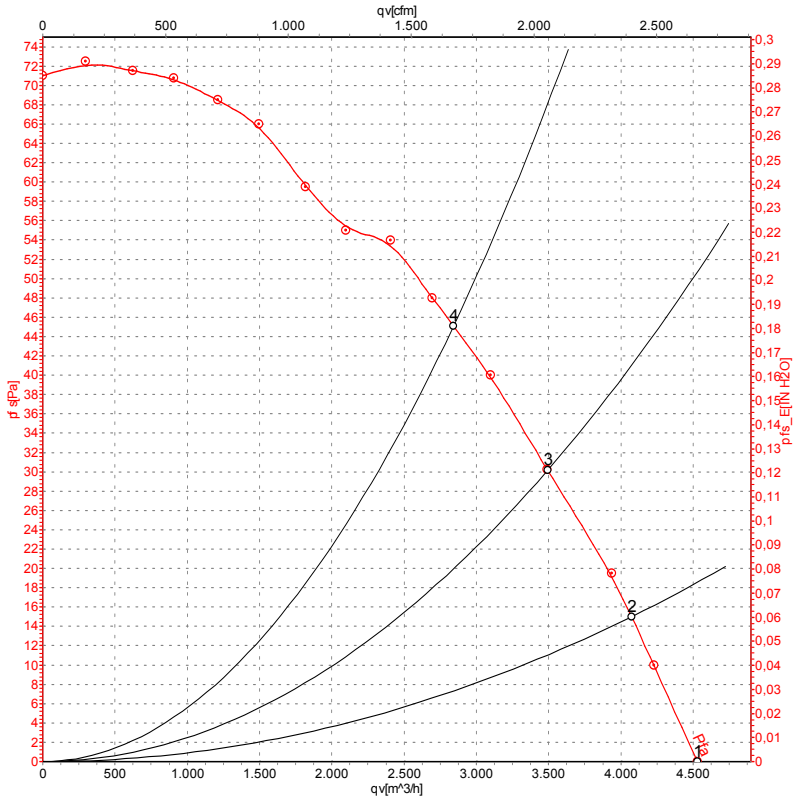


Measurement: LU-105020-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

| | U | f | n | $P_e$ | I | qv | $p_{fs}$ | qv | $p_{fs}$ |
|---|---|---|---|---|---|---|---|---|---|
| | V | Hz | $min^{-1}$ | W | A | $m^3/h$ | Pa | CFM | inH2O |
| 1 | 230 | 50 | 890 | 140 | 0.62 | 4530 | 0 | 2665 | 0.00 |
| 2 | 230 | 50 | 895 | 141 | 0.62 | 4075 | 15 | 2400 | 0.06 |
| 3 | 230 | 50 | 880 | 145 | 0.64 | 3495 | 30 | 2055 | 0.12 |
| 4 | 230 | 50 | 865 | 151 | 0.66 | 2840 | 45 | 1675 | 0.18 |

U = Power supply · f = Frequency · n = Speed (rpm) · $P_e$ = Power consumption · I = Current draw · qv = Air flow · $p_{fs}$ = Pressure increase



ebmpapst