R3G250-RR09-P1

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

ErP2015 EXCEEDS THE NORM

Nominal data

Type	**R3G250-RR09-P1**	
Motor	**M3G084-DF**	
Nominal voltage	VDC	110
Nominal voltage range	VDC	77 .. 138
Type of data definition		ml
Speed	min^{-1}	3800
Power input	W	540
Current draw	A	4.9
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	56.8	48.6
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		70.2	62
05 Variable speed drive		Yes	

09 Power input P_e	kW	0.53
09 Air flow q_v	m³/h	1210
09 Pressure increase p_{fs}	Pa	813
10 Speed n	min^{-1}	3805
11 Specific ratio*		1.01

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

* Specific ratio = 1 + p_{fs} / 100 000 Pa

LU-172878

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Technical features

Mass	4.1 kg
Size	250 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of impeller	PA plastic
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - Alarm relay - Run monitoring - Output limit - Motor current limit - RS485 MODBUS RTU - Soft start -Maximum EEPROM write cycles 100,000 - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Over-temperature protected electronics / motor - Line undervoltage detection
EMC directives	According to EN 50121-3-2
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 15085-1, CPC3: 2007; EN 45545-2, HL3: 2013; EN 50155: 2008; EN 61373, Cat. 1B: 2010
Approval	EAC
Remark	If voltage (e.g. 230 VAC) is passed through the alarm relay, the SELV signal wires lose their property of reinforced insulation, meaning they only have basic insulation The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay; EMC regulation: EN 50121-3-2 in preparation; speed limitation 4000 rpm


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Product drawing

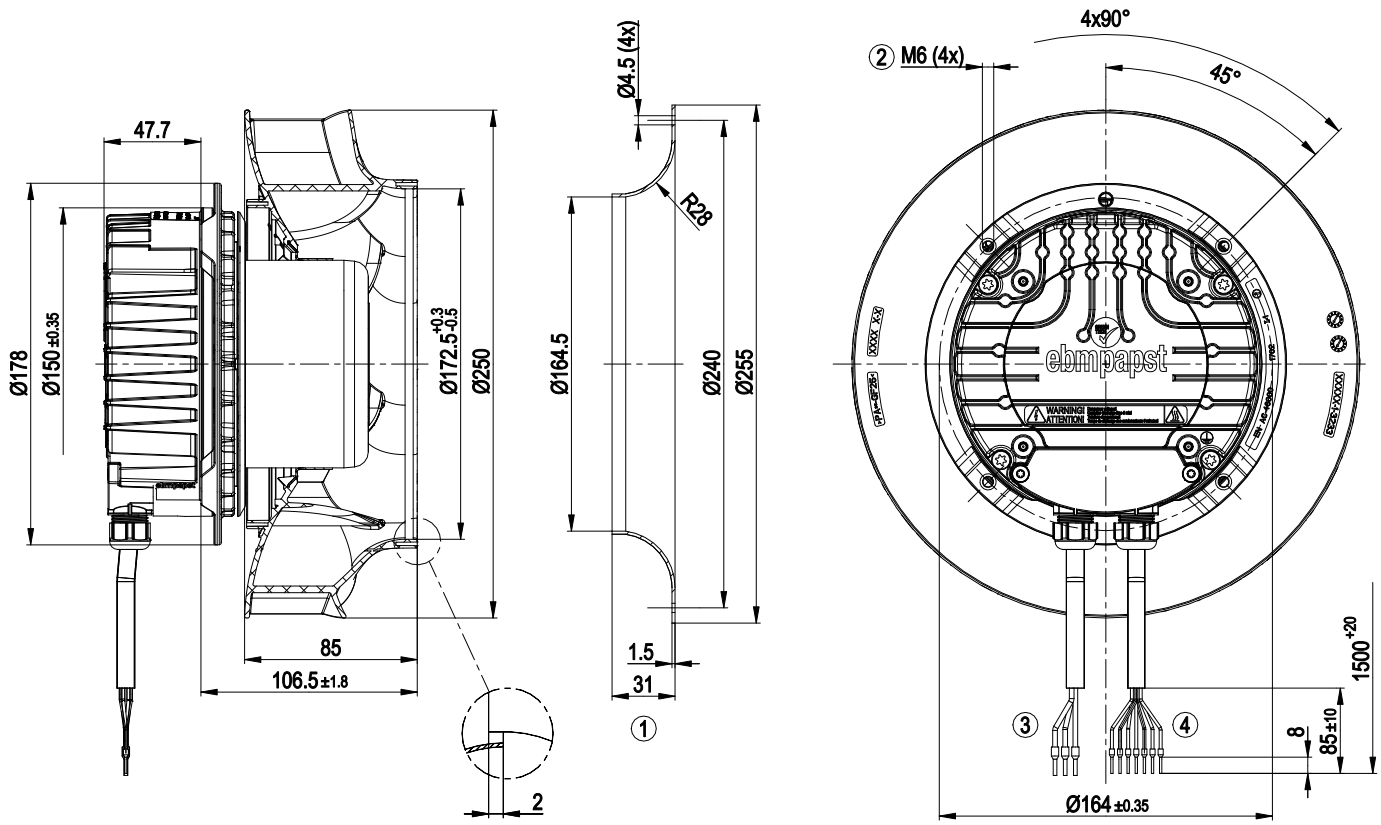

1	Accessory part: Inlet nozzle 96359-2-4013 not included in scope of delivery
2	Thread reach max. 16 mm
3	Connection line halogen-free, BETAtrans® 3 GKW flex, 4G 1.5 mm², 3x crimped core-end sleeves, 1 wire not brought out
4	Connection line halogen-free, BETAtrans® 3 GKW flex, 7x0.5 mm², 7x crimped core-end sleeves


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Connection screen

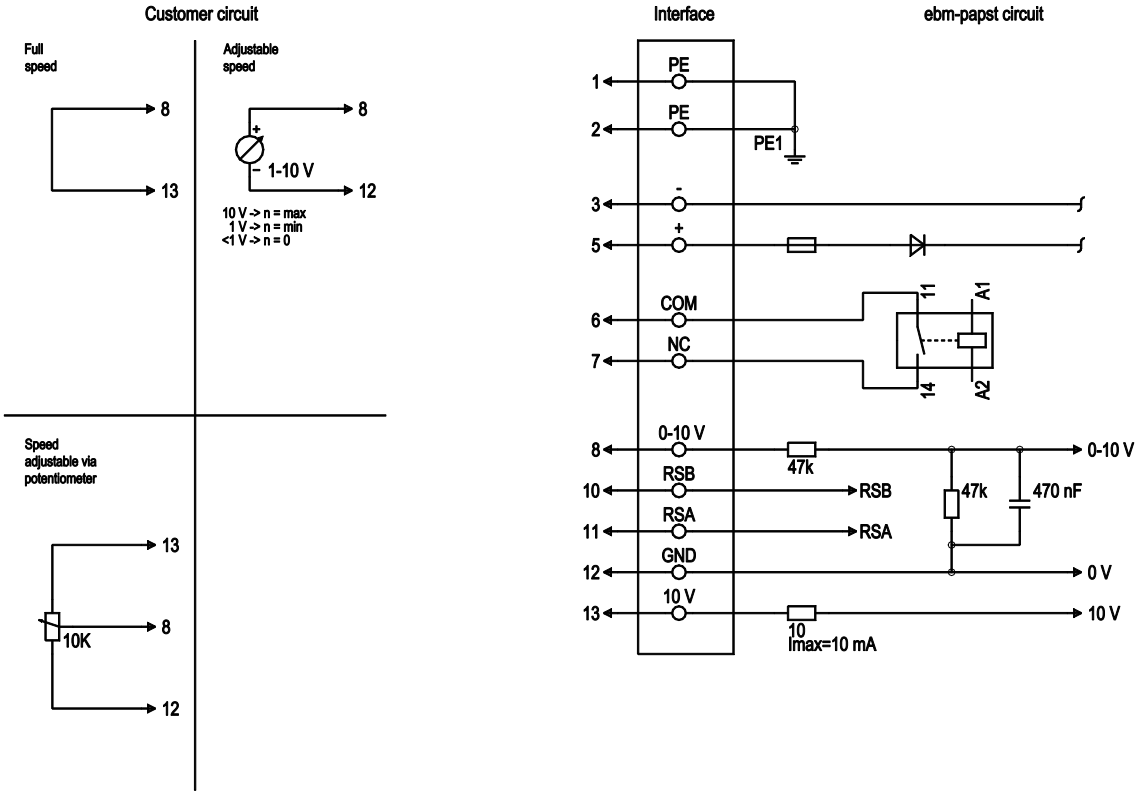

No.	Conn.	Designation	Colour	Function / assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	-	black	Power supply, GND, see type plate for voltage range
1	5	+	brown	Power supply, see type plate for voltage range
2	6	COM	grey	Status relay, floating status contact, break for failure, Contact rating 250 VAC / max. 2 A (AC1) / min. 1 mA / 5 V, basic insulation on mains side and on control interface
2	7	NC	orange	Status relay, floating status contact, common connection, Contact rating 250 VAC / max. 2 A (AC1) / min. 1 mA / 5 V, basic insulation on mains side and on control interface
2	8	0-10 V	yellow	Analogue input 1, set value: 0-10 V, Ri= 100 kΩ, parametrisable curve; SELV
2	10	RSB	brown	RS-485 interface for MODBUS, RSB; SELV
2	11	RSA	white	RS-485 interface for MODBUS, RSA; SELV
2	12	GND	blue	Reference earth for control interface; SELV
2	13	+10 V	red	Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometers); SELV


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Charts: Air flow

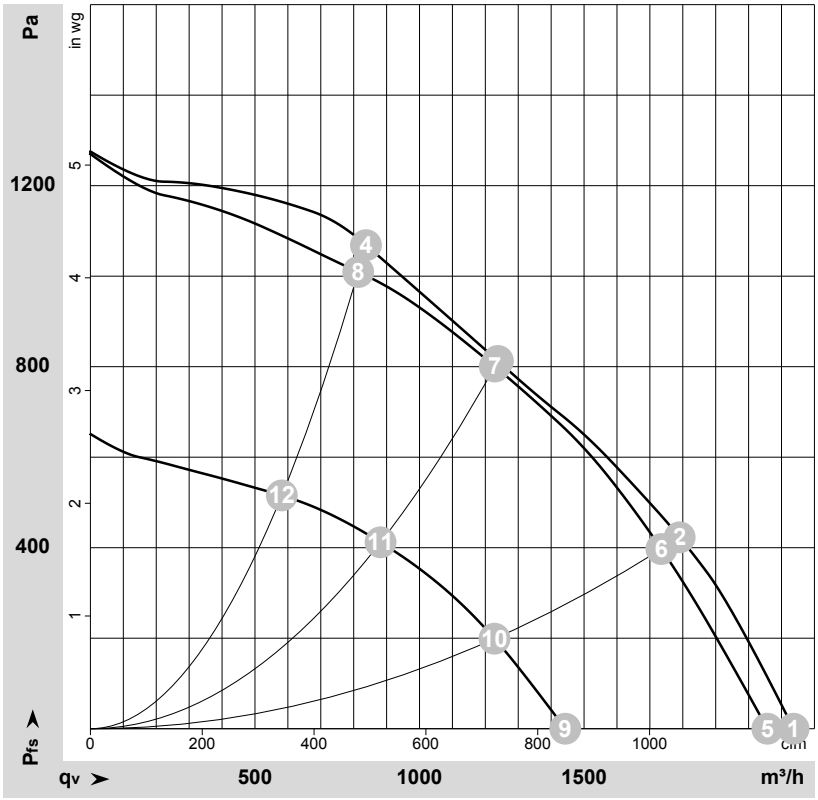

ρ = 1.154 kg/m³ ± 2 %

Measurement: LU-172892-1
Measurement: LU-172878-1
Measurement: LU-172890-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	n	P_{ed}	I	LpA_{in}	LwA_{in}	qv	p_{fs}
	V	min^{-1}	W	A	dB(A)	dB(A)	m^3/h	Pa
1	138	4000	492	3.56			2135	0
2	138	3945	557	4.04			1790	426
3	138	3835	555	4.02			1240	813
4	138	3955	553	4.00			835	1069
5	110	3860	447	4.06	78	86	2055	0
6	110	3815	510	4.64	75	83	1735	400
7	110	3800	540	4.90	72	80	1230	800
8	110	3840	510	4.63	74	82	815	1000
9	77	2755	173	2.25			1445	0
10	77	2735	197	2.56			1230	200
11	77	2725	211	2.73			880	412
12	77	2735	197	2.56			580	516

U = Supply voltage · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · qv = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com