Product Data Sheet | AC 4400 FNN



The engineer's choice

ebmpapst

AC 4400 FNN

INDEX

1 General 3
2 Mechanics 3
2.1 General 3
2.2 Connections 3
3 Operating Data 4
3.1 Operating Data - Electrical Interface - Input 4
3.2 Electrical Operating Data 4
3.3 Operating Data - Electrical Interface -Output 4
3.4 Electrical Features 4
3.5 Aerodynamic 5
3.6 Sound Data 6
4 Environment 6
4.1 General 6
4.2 Climatic requirements*) 6
5 Safety 6
5.1 Electrical Safety 6
5.2 Approval Tests 7

1 General

Fan type	Fan
Rotational direction looking at rotor	counterclockwise
Airflow direction	Air outlet over struts
Bearing system	Ball bearing
Mounting position	any

2 Mechanics


2.1 General

Width	119,0 mm	
Height	119,0 mm	
Depth	58,0 mm	
Diameter	0,0 mm	
Weight	0,370 kg	
Housing material	Plastic	
Impeller material	Plastic	

2.2 Connections

Electrical connection	Wires	
Length of lead wire Tolerance	L = 450 mm +- 10,0 mm	
Length of tube Tolerance	S = 15 mm +- 5 mm	
Wire gauge (AWG)	22	
Insulation diameter		
Plug	see drawing	
Contact	see drawing	



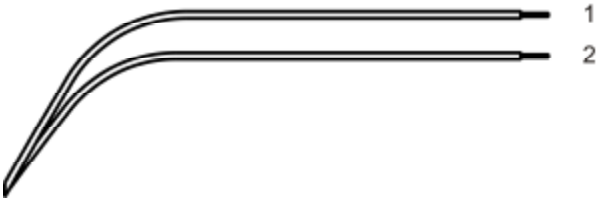

	Colour	Operation
Wire 1	black	L1
Wire 2	black	L2

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

External voltage supply for input and output signals must be SELV conform.

Control input	None

3.2 Electrical Operating Data

Features	Condition	Symbol	Values			
Voltage range	Δp = 0	U	85 V		265 V	115 V
Nominal voltage	Δp = 0	U_N		230 V		
Frequency	Δp = 0	f	50 Hz			60 Hz
Power consumption Tolerance	Δp = 0	P	12 W +- 15 %	12 W +- 15 %	12 W +- 20 %	12 W +- 20 %
Speed Tolerance	Δp = 0	n	4.850 1/min +- 10 %	4.850 1/min +- 10 %	4.850 1/min +- 10 %	4.850 1/min +- 10 %


3.3 Operating Data - Electrical Interface -Output

External voltage supply for input and output signals must be SELV conform.

Tacho type	None
Alarm type	None

3.4 Electrical Features

Electronic function	None	
Locked rotor protection	Auto restart	
Clock signal t3/t4 at locked rotor	Typical: 0,25 s / 20 s	

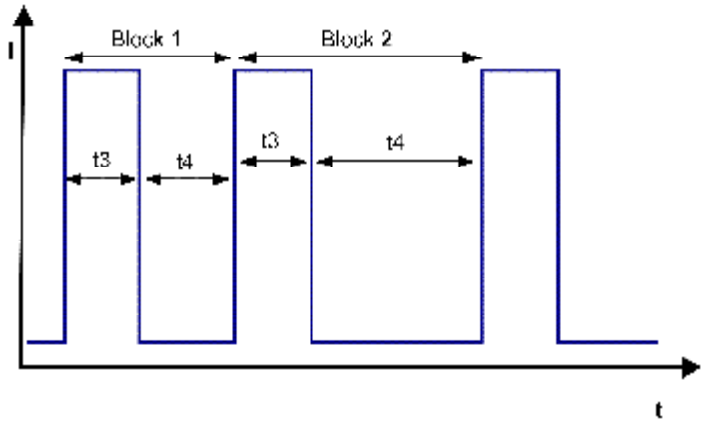

3.5 Aerodynamic

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a) Operation condition:


4.850 1/min at free air flow Frequency: 50 Hz Nominal voltage: 230 V

Max. free-air flow (Δp = 0 / V̇ = max.)	205,0 m3/h
Max. static pressure (Δp = max. / V̇ =0)	168 Pa

b) Operation condition:

4.850 1/min at free air flow Frequency: 60 Hz Nominal voltage: 115 V

Max. free-air flow (Δp = 0 / V̇ = max.)	205 m3/h
Max. static pressure (Δp = max. / V̇ =0)	168 Pa

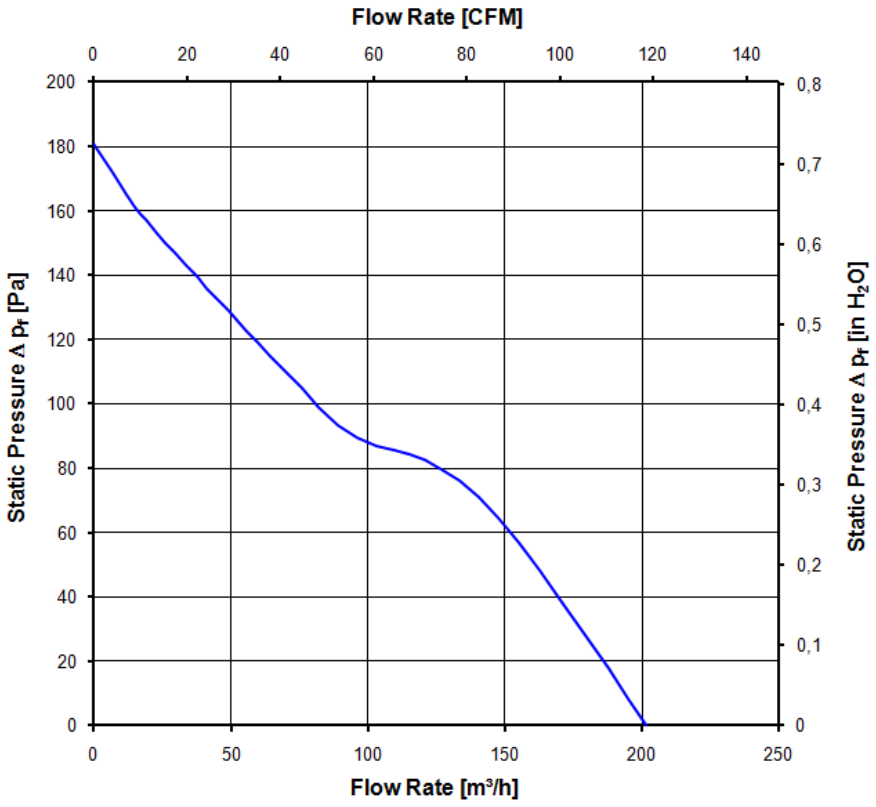

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.4

a) Operation condition:
4.850 1/min at free air flow Frequency: 50 Hz Nominal voltage: 230 V

Optimal operating point	128,0 m3/h @ 75 Pa	
Sound power level at the optimal operating point	6,2 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	53,0 dB(A)	

b) Operation condition:
4.850 1/min at free air flow Frequency: 60 Hz Nominal voltage: 115 V

Optimal operating point	128,0 m3/h @ 75 Pa	
Sound power level at the optimal operating point	6,2 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	53,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Radiation exposure	None	
Dust requirements	None	
Salt fog requirements	None	
Harmful gas requirements	None	

*) Permittet application area:
The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.
Pollution degree 1 (according DIN EN 60664-1)
There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.**Safety**

5.1 Electrical Safety


A verification of thermal conditions (normal and abnormal operation) as well as the protection against electric shock, ingress of solid foreign objects and water has to be done in conjuction with the appliance.

Test voltage HV type test	1500 V
Unit test voltage	VAC
Time type test HV	1 s
Insulation resistance	RI > 10 MOhm
Protection class	built-in fan

5.2 Approval Tests

CE	Yes
UL	Yes
VDE	Yes
CSA	Yes
CCC	Yes

According to the guidelines on the application of Directive 2006/95/EC, chapter III: Scope of the "low voltage" directive, paragraph: Are "components" included in the scope? the following has to be applied:
However, some types of electrical devices, designed and manufactured for being uses as basic components to be incorporated into other electrical equipment, are such that their safety to a very large extent depends on how they are integrated into the final product and the overall characteristics of the final product. These basic components include electronic and certain other components.
Taking into account these objectives of the "Low Voltage" Directive, such basic components, the safety of which can only, to a very large extend, be assessed taking into account, how they are incorporated and for which a risk assessment cannot be undertaken, then they are not covered as such by the Directive. In particular, they must not be CE marked unless covered by other Community legislation that requires CE marking.

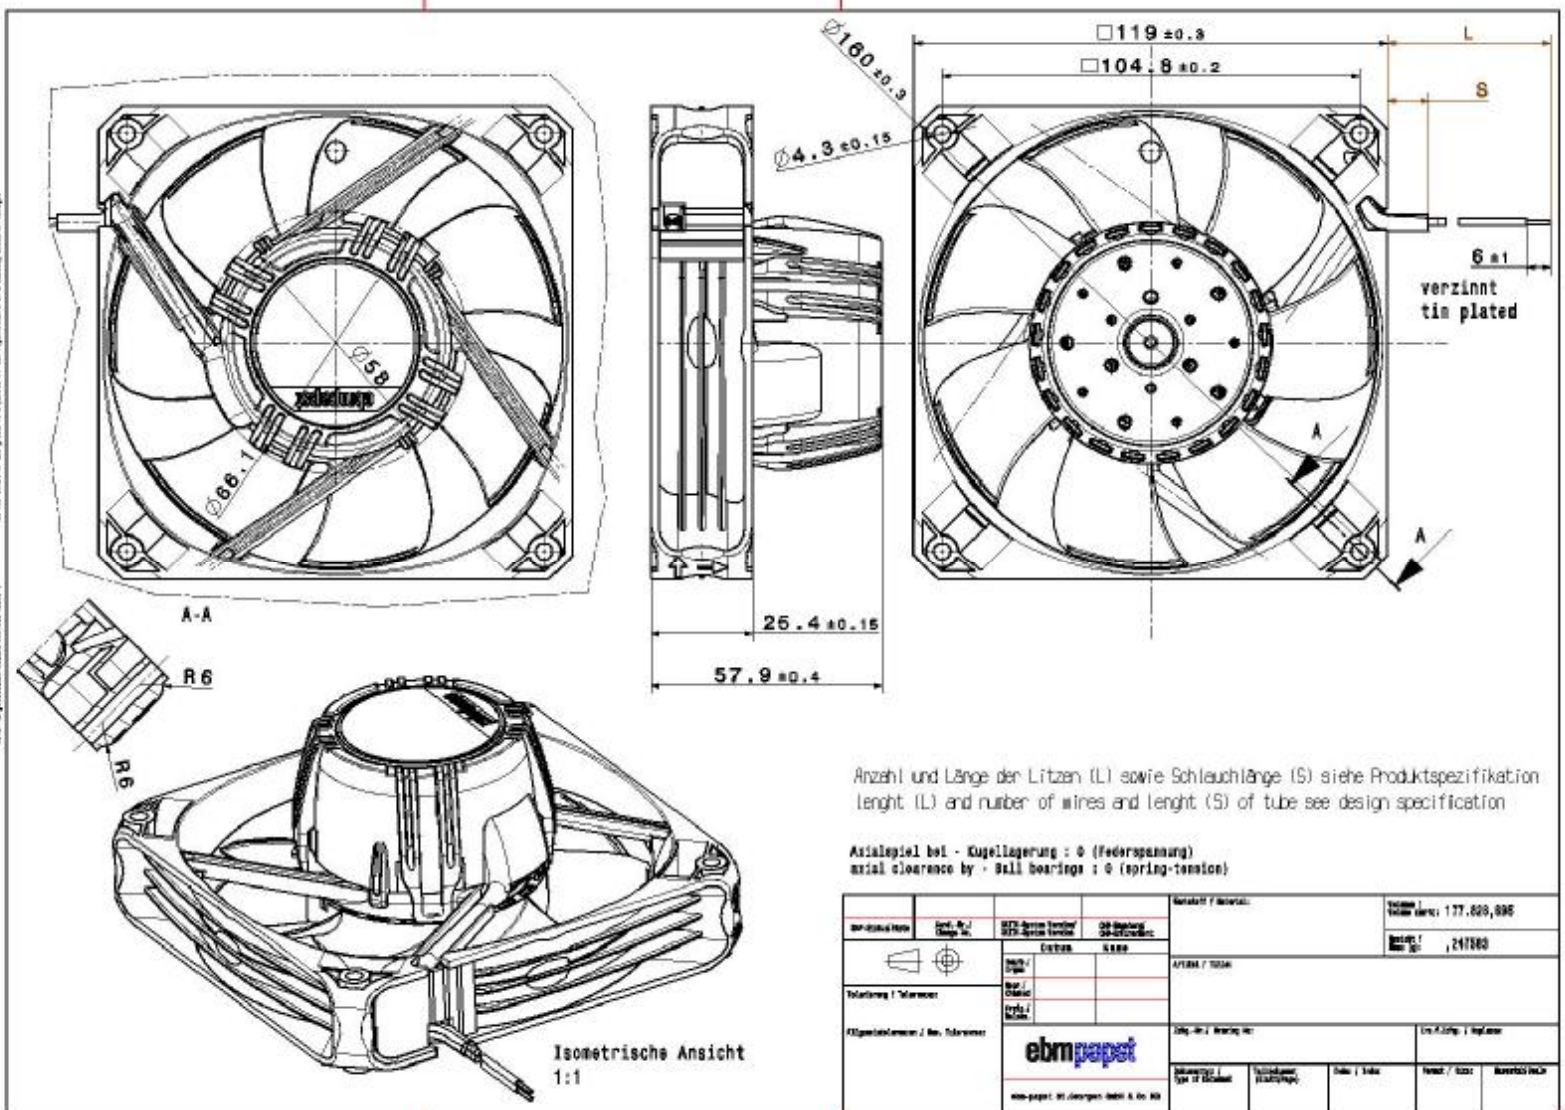

Anzahl und Länge der Litzen (L) sowie Schlauchlänge (S) siehe Produktspezifikation
lenght (L) and number of wires and lenght (S) of tube see design specification

Axialspiel bei - Kugellagerung : 0 (Federspannung)
axial clearence by - Ball bearings : 0 (spring-tension)

ebmpapst