W3G800-MV05-03

EC axial fan - AxiBlade

sickled blades (S series)

Wall ring with streamer

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

Type	**W3G800-MV05-03**	
Motor	**M3G150-NA**	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed (rpm)	min^{-1}	1200
Power input	W	3300
Current draw	A	5.0
Max. back pressure	Pa	310
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011

		Actual	Request 2015
01 Overall efficiency η_{es}	%	55.5	36.9
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		58.6	40
05 Variable speed drive		Yes	

09 Power input P_{ed}	kW	3.27
09 Air flow q_v	m^3/h	21385
09 Pressure increase p_{fs}	Pa	292
10 Speed (rpm) n	min^{-1}	1200
11 Specific ratio*		1.00

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

* Specific ratio = 1 + p_{fs} / 100 000 Pa

LU-181206

EC axial fan - AxiBlade

sickled blades (S series)

Wall ring with streamer

Technical features

Mass	57.5 kg
Size	800 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium, painted grey
Material of impeller	PP plastic
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Streamer material	PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Material of inner diffuser including lid	PP plastic
Number of blades	5
Blade angle	0°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 55
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display via LED - External 15-50 VDC input (parametrisation) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6 - Motor current limit - RFID - ISO 15693 compatible - RS485 MODBUS RTU - Soft start - Maximum EEPROM write cycles 100,000 - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Excess temperature protection for electronics/motor - Undervoltage/phase failure detection
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	C22.2 Nr.77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC axial fan - AxiBlade

sickled blades (S series)

Wall ring with streamer

Product drawing

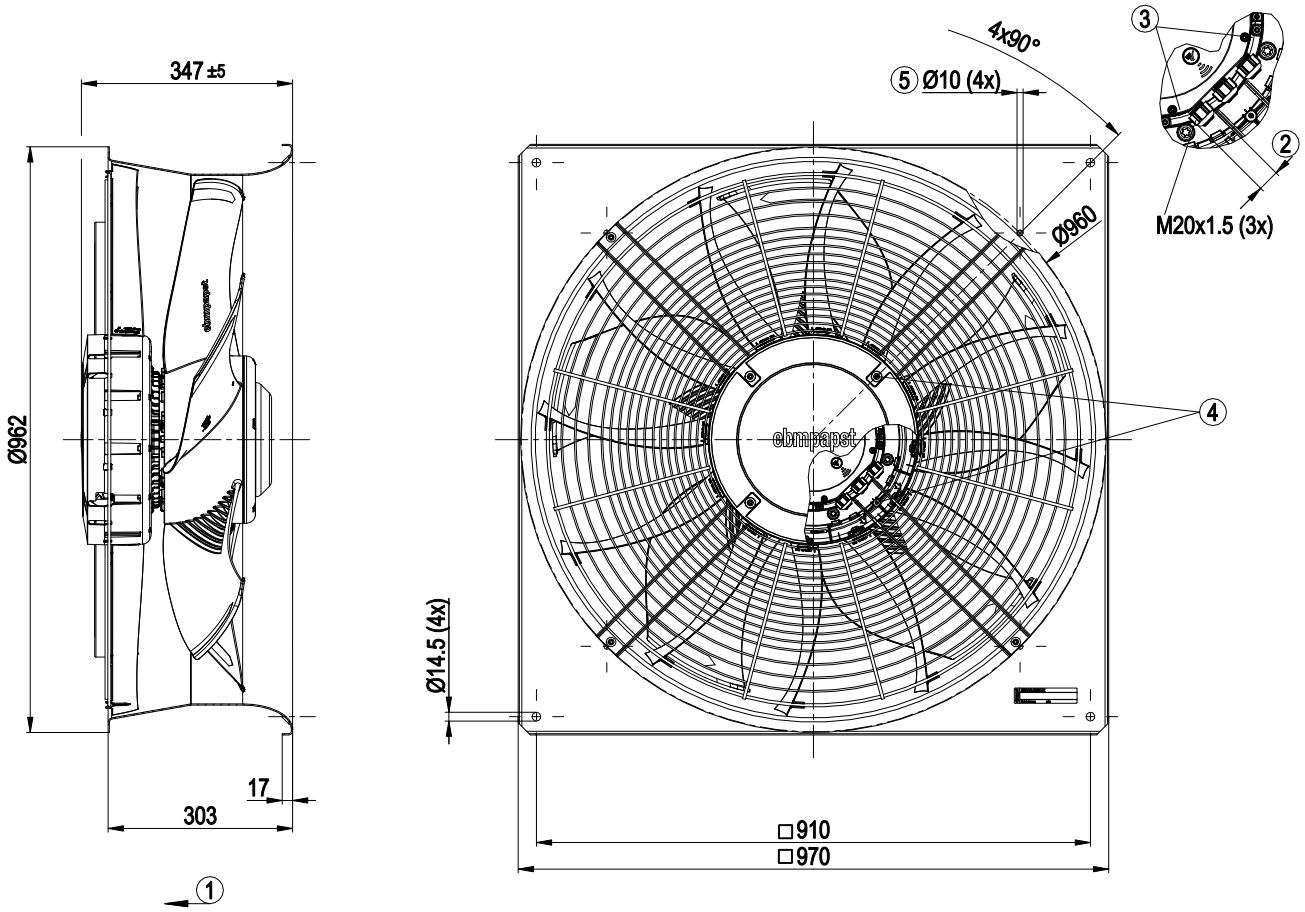

1	Direction of air flow "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 2.5±0.4 Nm
3	Tightening torque 1.8±0.3 Nm
4	Tightening torque 4.0±0.6 Nm
5	Mounting holes for FlowGrid


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC axial fan - AxiBlade

sickled blades (S series)

Wall ring with streamer

Connection screen

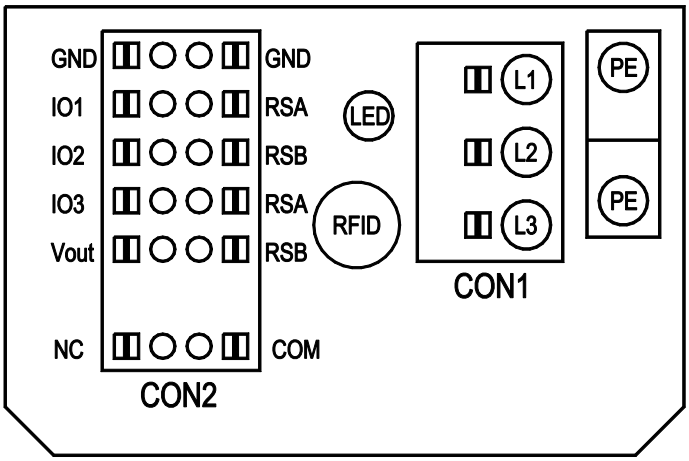

No.	Conn.	Designation	Function / assignment
CON1	-	L1, L2, L3	Mains connection, power supply, safety class 1
PE	-	PE	Earth connection, PE connection
CON2	-	RSA	Bus connection RS-485, RSA, MODBUS RTU; SELV
CON2	-	RSB	Bus connection RS-485, RSB, MODBUS RTU; SELV
CON2	-	GND	GND reference earth for control interface, SELV
CON2	-	IO1	IN2: Digital input - positive logic (factory setting: Enable) function parametrizable, SELV - normal: Pin open or applied voltage < 1.5 VDC - inverse: applied voltage 3.5-50 VDC
CON2	-	IO2	IN1: Analogue input 0-10 V 0-10 V, Ri=100 K, parametrizable as set value or actual value (factory setting: set value) characteristic curve parametrizable, SELV
CON2	-	IO3	OUT1: Analogue output 0-10 V 0-10 V, max 5 mA, function parametrizable (factory setting: modulation level) max. output frequency 300 Hz, SELV
CON2	-	V out	Voltage output 3.3-24 VDC +/-5%, Pmax=800 mW, voltage parametrisable (factory setting: 10 VDC) short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parametrisation via Modbus without mains power
CON2	-	COM	Status relay, floating status contact; common connection, nominal voltage 250 VAC; max 2 A (AC1): min 10 mA; Reinforced insulation as per EN60335-1, EN61800-5-1, UL60730-1
CON2	-	NC	Status relay, floating status contact, break for failure


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC axial fan - AxiBlade

sickled blades (S series)

Wall ring with streamer

Charts: Air flow 50 Hz

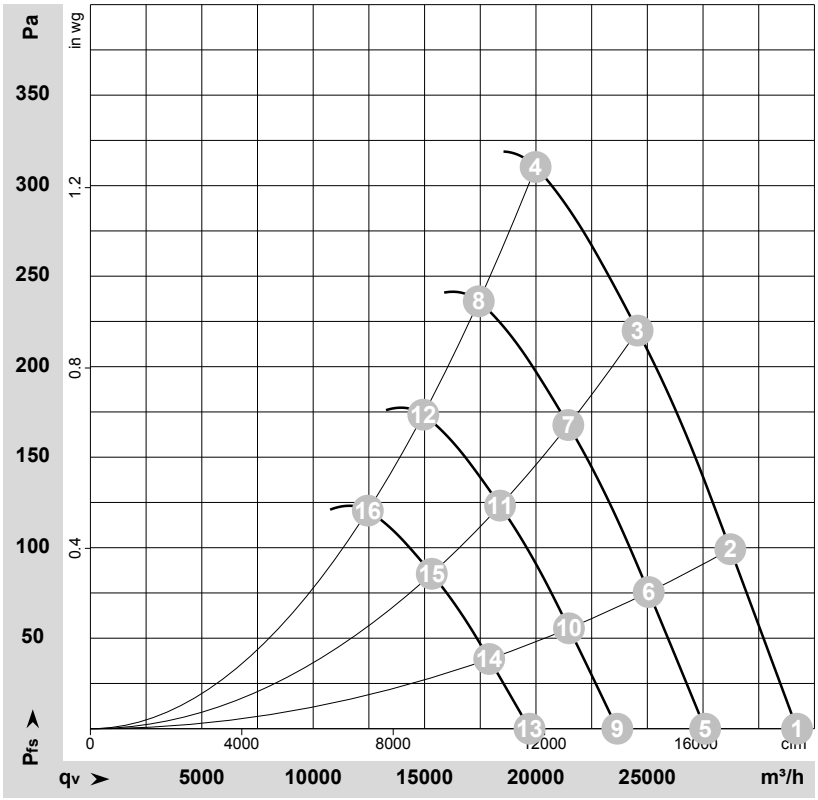

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-181206-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P_{ed}	I	LpA_{in}	LwA_{in}	LwA_{out}	q_V	p_{fs}	q_V	p_{fs}
	V	Hz	min^{-1}	W	A	dB(A)	dB(A)	dB(A)	m^3/h	Pa	cfm	inH2O
1	400	50	1200	2392	3.70	76	84	85	31720	0	18670	0.00
2	400	50	1200	2778	4.28	74	82	84	28725	100	16905	0.40
3	400	50	1200	3154	4.84	77	84	85	24565	220	14455	0.88
4	400	50	1200	3300	5.00	84	92	92	19985	310	11765	1.24
5	400	50	1050	1575	2.43	73	81	82	27595	0	16240	0.00
6	400	50	1050	1848	2.85	71	79	80	25060	76	14750	0.31
7	400	50	1050	2101	3.22	73	81	81	21450	168	12625	0.67
8	400	50	1050	2180	3.35	81	88	89	17435	236	10260	0.95
9	400	50	900	992	1.53	69	77	78	23655	0	13920	0.00
10	400	50	900	1164	1.79	67	75	76	21480	56	12645	0.22
11	400	50	900	1323	2.03	69	77	77	18390	123	10825	0.49
12	400	50	900	1373	2.11	77	84	85	14940	174	8795	0.70
13	400	50	750	574	0.89	64	72	73	19710	0	11600	0.00
14	400	50	750	674	1.04	62	70	72	17900	39	10535	0.16
15	400	50	750	766	1.17	65	73	73	15325	86	9020	0.35
16	400	50	750	794	1.22	72	80	80	12450	121	7330	0.49

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side
q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com