

8112 K

DC Axial Fan

80 x 38mm (3.2" X 1.5") Brushless DC — 8100 Series



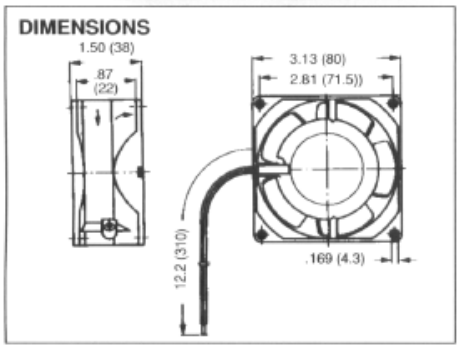

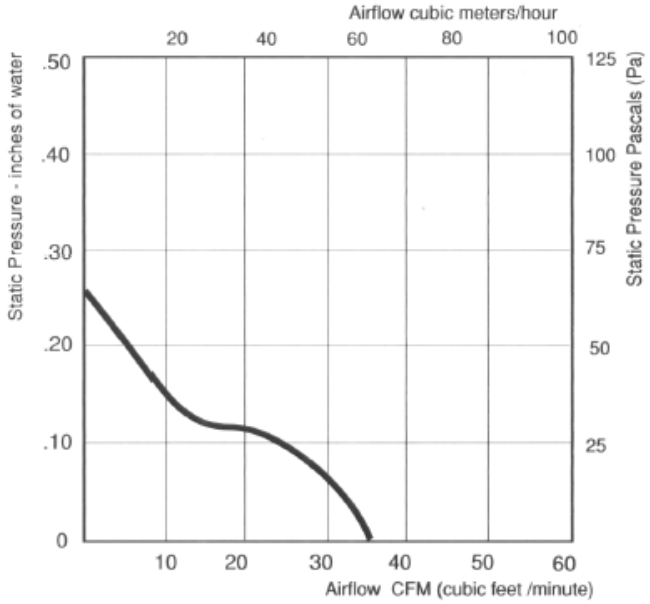

AVAILABLE WITH:
HIGH PERFORMANCE SINTEC SLEEVE BEARING SYSTEM

3.15" X 3.15" X 1.50" Brushless DC, All Metal, Air Exhaust – Over Struts

PART NUMBER	Type of Bearing	DC Volts	DC Voltage Range	Watts	CFM @ 0"	dBA	Temp. Max °C	Wgt. (oz)	Features	Approvals* UL	CSA	VDE
8112G	Sleeve	12	8 to 16	3	35	38	72	15	12.2" AWG 22 Leads	√	√	√
8112K	Ball	12	8 to 16	3	35	39	72	15	12.2" AWG 22 Leads	√	√	√
8124G	Sleeve	24	18 to 30	3	35	38	72	15	12.2" AWG 22 Leads	√	√	√
8124K	Ball	24	18 to 30	3	35	39	72	15	12.2" AWG 22 Leads	√	√	√
8148	Ball	48	38 to 56	3	35	39	72	15	12.2" AWG 22 Leads	√	√	√

* UL yellow card E38324, CSA file 27697, VDE file 3041

3.15" X 3.15" X 1.50" Brushless DC, All Metal, Air Intake – Over Struts

PART NUMBER	Type of Bearing	DC Volts	DC Voltage Range	Watts	CFM @ 0"	dBA	Temp. Max °C	Wgt. (oz)	Features	Approvals* UL	CSA	VDE
8105G	Sleeve	5	4.5 to 5.5	3	35	38	72	15	12.2" AWG 22 Leads	-	-	-