**S3G910-CZ01-06**

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

**ebm-papst Mulfingen GmbH & Co. KG**
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

| | |
|---|---|
| **Type** | **S3G910-CZ01-06** |
| **Motor** | **M3G150-NA** |

| | | |
|---|---|---|
| Phase | | 3~ |
| Nominal voltage | VAC | 400 |
| Nominal voltage range | VAC | 380 .. 480 |
| Frequency | Hz | 50/60 |
| Method of obtaining data | | ml |
| Speed (rpm) | $min^{-1}$ | 1195 |
| Power consumption | W | 3040 |
| Current draw | A | 4.9 |
| Max. back pressure | Pa | 180 |
| Max. back pressure | in. wg | 0.72 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 60 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

| | | Actual | Req. 2015 |
|---|---|---|---|
| 01 Overall efficiency $\eta_{es}$ | % | 48.2 | 37 |
| 02 Measurement category | | A | |
| 03 Efficiency category | | Static | |
| 04 Efficiency grade N | | 51.2 | 40 |
| 05 Variable speed drive | | Yes | |

| | | |
|---|---|---|
| 09 Power consumption $P_{ed}$ | kW | 3.32 |
| 09 Air flow $q_v$ | $m^3/h$ | 23725 |
| 09 Pressure increase $p_{fs}$ | Pa | 231 |
| 10 Speed (rpm) n | $min^{-1}$ | 1165 |
| 11 Specific ratio* | | 1.00 |

Data obtained at optimum efficiency level.

* Specific ratio = 1 + $p_{fs}$ / 100 000 Pa

LU-164595

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

## Technical description

| | |
|---|---|
| **Weight** | 40.5 kg |
| **Size** | 910 mm |
| **Motor size** | 150 |
| **Rotor surface** | Painted black |
| **Electronics housing material** | Die-cast aluminum, painted black |
| **Blade material** | Sheet aluminum insert, sprayed with PP plastic |
| **Guard grille material** | Steel, coated with black plastic (RAL 9005) |
| **Number of blades** | 5 |
| **Blade pitch** | -5° |
| **Airflow direction** | V |
| **Direction of rotation** | Clockwise, viewed toward rotor |
| **Degree of protection** | IP55 |
| **Insulation class** | "F" |
| **Moisture (F) / Environmental (H) protection class** | H2 |
| **Max. permitted ambient temp. for motor (transport/storage)** | +80 °C |
| **Min. permitted ambient temp. for motor (transport/storage)** | -40 °C |
| **Installation position** | Shaft horizontal or rotor on bottom; rotor on top on request |
| **Condensation drainage holes** | On rotor side |
| **Mode** | S1 |
| **Motor bearing** | Ball bearing |
| **Technical features** | - Output 10 VDC, max. 10 mA<br>- Output 20 VDC, max. 50 mA<br>- Output for slave 0-10 V<br>- Input for sensor 0-10 V or 4-20 mA<br>- External 24 V input (parameter setting)<br>- External release input<br>- Alarm relay<br>- Integrated PID controller<br>- Power limiter<br>- Motor current limitation<br>- PFC, passive<br>- RS-485 MODBUS-RTU<br>- Soft start<br>- EEPROM write cycles: 100,000 maximum<br>- Control input 0-10 VDC / PWM<br>- Control interface with SELV potential safely disconnected from the mains<br>- Thermal overload protection for electronics/motor<br>- Line undervoltage / phase failure detection |
| **EMC immunity to interference** | According to EN 61000-6-2 (industrial environment) |
| **EMC interference emission** | According to EN 61000-6-3 (household environment) |
| **Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)** | <= 3.5 mA |
| **Electrical hookup** | Terminal box |
| **Motor protection** | Reverse polarity and locked-rotor protection |
| **Protection class** | I (with customer connection of protective earth) |



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

| | |
|---|---|
| **Conformity with standards** | EN 61800-5-1; UKCA; CE |
| **Approval** | UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1 |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

## Product drawing

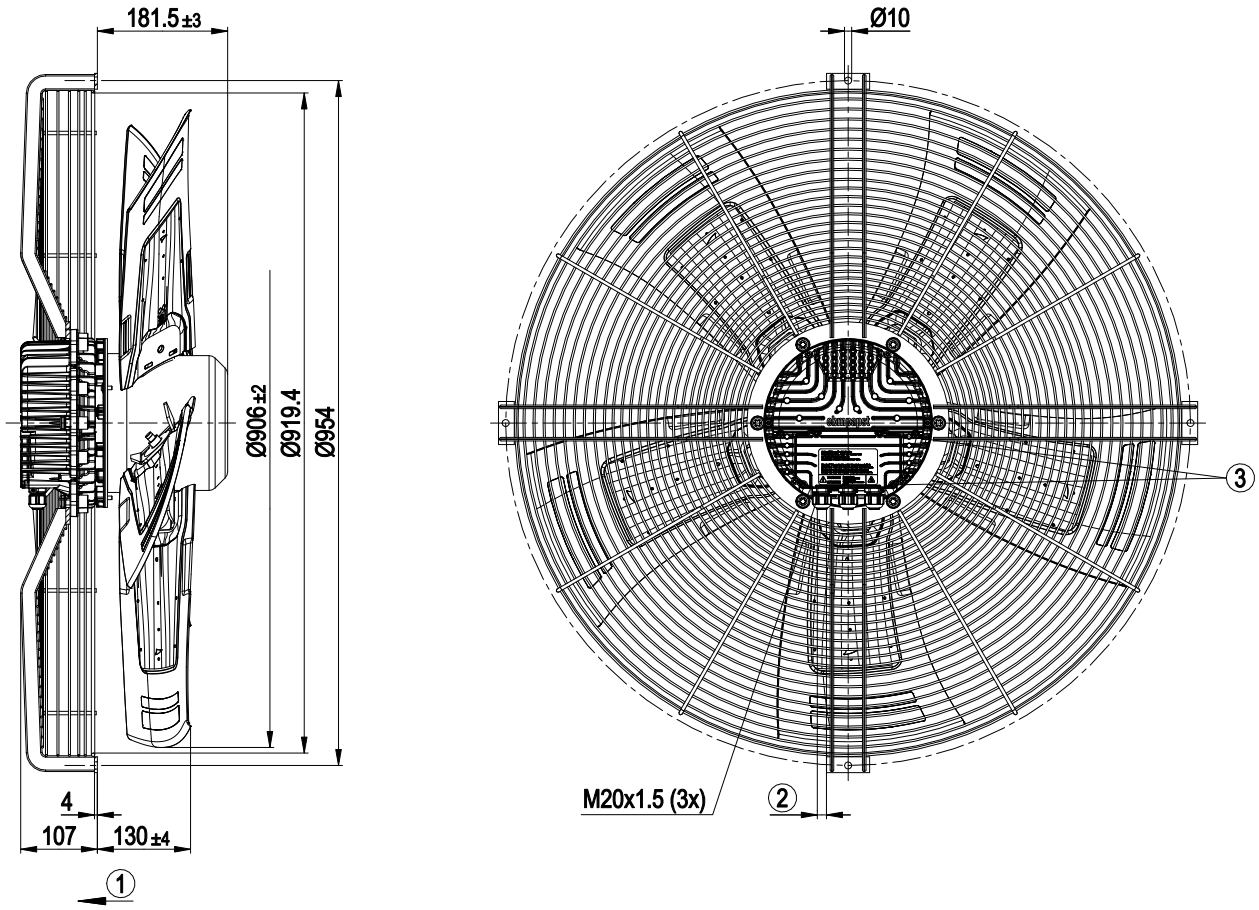


| | |
|---|---|
| 1 | Direction of air flow "V" |
| 2 | Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm |
| 3 | Tightening torque 3.5 ± 0.5 Nm |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

## Connection diagram

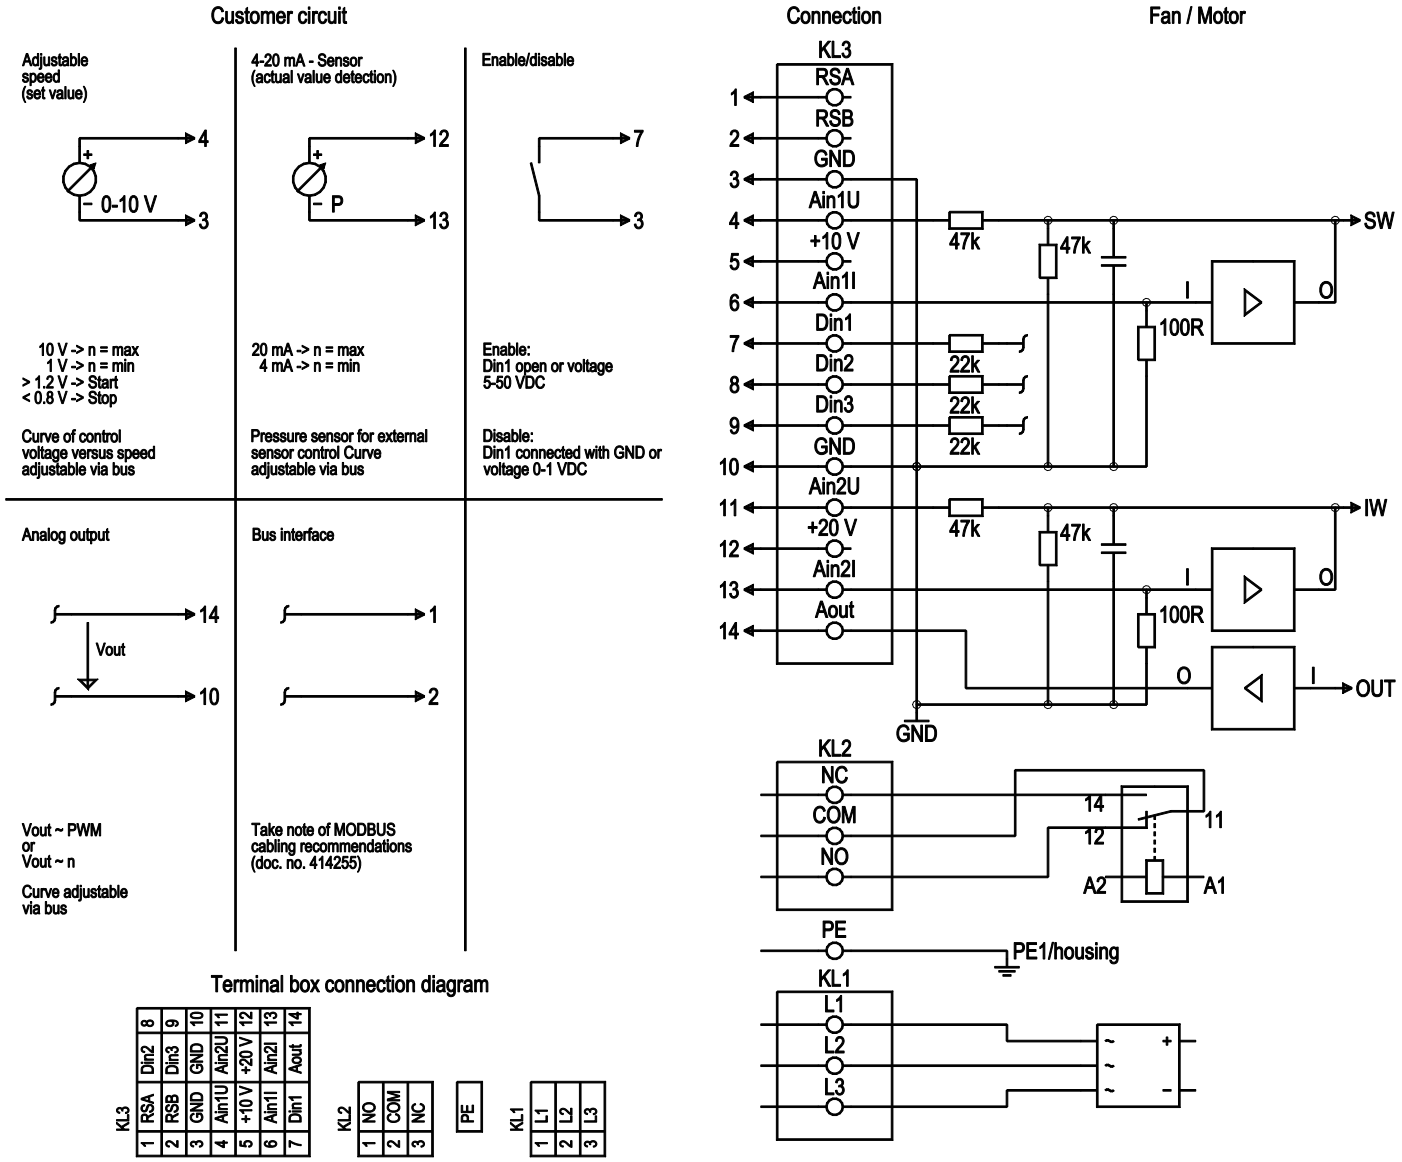


Terminal box connection diagram




| No. | Conn. | Designation | Function/assignment |
|---|---|---|---|
| KL 1 | 1 | L1 | Supply connection, power supply; for nominal voltage range see technical data |
| KL 1 | 2 | L2 | Supply connection, power supply; for nominal voltage range see technical data |
| KL 1 | 3 | L3 | Supply connection, power supply; for nominal voltage range see technical data |
| PE | | PE | Ground connection, PE connection |
| KL 2 | 1 | NO | Status relay, floating status contact, make for failure |
| KL2 | 2 | COM | Status relay, floating status contact, changeover contact, common connection, contact rating 250 VAC / max. 2 A (AC1) / min. 10 mA |
| KL2 | 3 | NC | Status relay, floating status contact, break for failure |
| KL 3 | 1 | RSA | Bus connection RS485, RSA, MODBUS-RTU; SELV |
| KL 3 | 2 | RSB | Bus connection RS485, RSB, MODBUS-RTU; SELV |
| KL 3 | 3 / 10 | GND | Reference ground for control interface; SELV |
| KL 3 | 4 | Ain1 U | Analog input 1, set value: 0-10 V, Ri = 100 kΩ, adjustable curve, only usable as alternative to input Ain1I; SELV |



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

| No. | Conn. | Designation | Function/assignment |
|---|---|---|---|
| KL 3 | 5 | + 10 V | Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof power supply for external devices (e.g. pot); SELV |
| KL 3 | 6 | Ain1 I | Analog input 1, set value: 4-20 mA, Ri = 100 Ω, adjustable curve, only usable as alternative to input Ain1U; SELV |
| KL 3 | 7 | Din1 | Digital input 1: enable electronics,<br>enable: pin open or applied voltage 5-50 VDC<br>disable: bridge to GND or applied voltage < 1 VDC<br>reset function: triggers software reset after a level change to < 1 VDC; SELV |
| KL 3 | 8 | Din2 | Digital input 2: Switching parameter sets 1/2, according to EEPROM setting, the valid or used parameter set can be selected via bus or via digital input DIN2.<br>Parameter set 1: pin open or applied voltage 5-50 VDC<br>Parameter set 2: bridge to GND or applied voltage < 1 VDC; SELV |
| KL 3 | 9 | Din3 | Digital input 3: according to EEPROM setting, the integrated controller's direction of action can be selected via bus or digital input Din3;<br>normal: pin open or applied voltage 5-50 VDC<br>inverse: bridge to GND or applied voltage < 1 VDC; SELV |
| KL 3 | 11 | Ain2 U | Analog input 2, measured value: 0-10 V, Ri = 100 kΩ, adjustable curve, only usable as alternative to input Ain2I; SELV |
| KL 3 | 12 | + 20 V | Fixed voltage output 20 VDC, +20 V +25/-10%, max. 50 mA, short-circuit-proof power supply for external devices (e.g. sensors); SELV<br>or: +24 VDC input for parameter setting without line voltage |
| KL 3 | 13 | Ain2 I | Analog input 2, measured value: 4-20 mA, Ri = 100 Ω, adjustable curve, only usable as alternative to input Ain2U; SELV |
| KL 3 | 14 | Aout | Analog output 0-10 VDC, max. 5 mA, output of current motor modulation level / motor speed adjustable curve; SELV |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

## Curves: Air performance 50 Hz

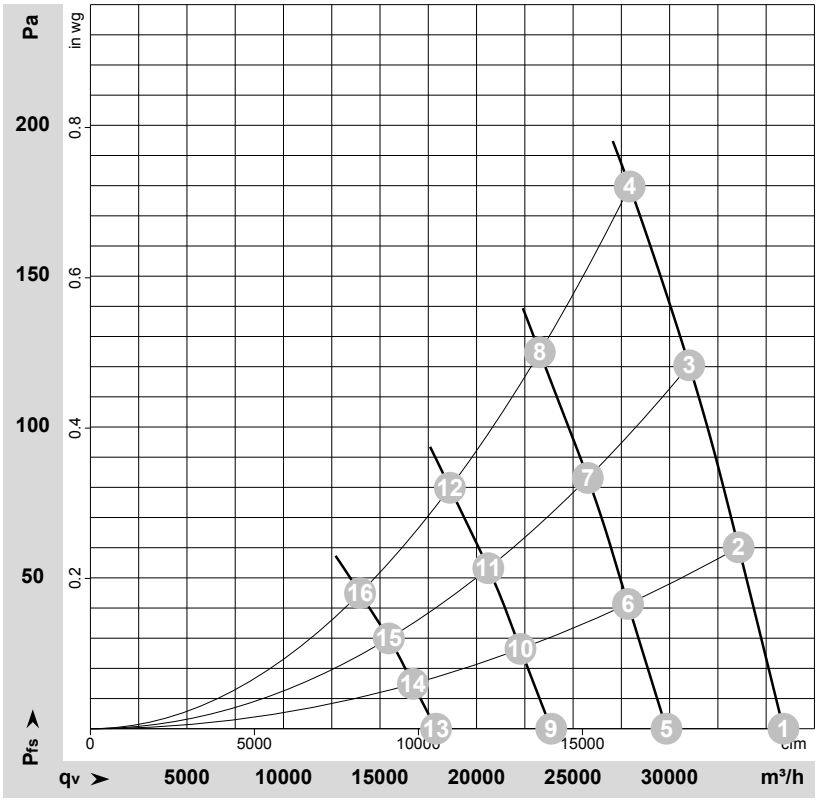


ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-134645-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

| | U | f | n | $P_{ed}$ | I | $LpA_{in}$ | $LwA_{in}$ | $LwA_{out}$ | $q_V$ | $p_{fs}$ | $q_V$ | $p_{fs}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | V | Hz | $min^{-1}$ | W | A | dB(A) | dB(A) | dB(A) | $m^3/h$ | Pa | cfm | in. wg |
| 1 | 400 | 50 | 1195 | 2109 | 3.49 | 78 | 85 | 85 | 35895 | 0 | 21125 | 0.00 |
| 2 | 400 | 50 | 1195 | 2538 | 4.10 | 76 | 84 | 84 | 33575 | 60 | 19760 | 0.24 |
| 3 | 400 | 50 | 1195 | 2827 | 4.61 | 75 | 83 | 83 | 31015 | 120 | 18255 | 0.48 |
| 4 | 400 | 50 | 1195 | 3040 | 4.90 | 75 | 82 | 82 | 27930 | 180 | 16440 | 0.72 |
| 5 | 400 | 50 | 1000 | 1211 | 2.01 | 73 | 80 | 80 | 29840 | 0 | 17560 | 0.00 |
| 6 | 400 | 50 | 1000 | 1441 | 2.33 | 71 | 79 | 79 | 27845 | 41 | 16390 | 0.16 |
| 7 | 400 | 50 | 1000 | 1621 | 2.64 | 71 | 78 | 79 | 25760 | 84 | 15165 | 0.34 |
| 8 | 400 | 50 | 1000 | 1812 | 2.93 | 70 | 78 | 78 | 23275 | 125 | 13700 | 0.50 |
| 9 | 400 | 50 | 800 | 620 | 1.03 | 68 | 75 | 75 | 23870 | 0 | 14050 | 0.00 |
| 10 | 400 | 50 | 800 | 738 | 1.19 | 66 | 73 | 73 | 22275 | 26 | 13110 | 0.10 |
| 11 | 400 | 50 | 800 | 830 | 1.35 | 65 | 72 | 73 | 20610 | 53 | 12130 | 0.21 |
| 12 | 400 | 50 | 800 | 928 | 1.50 | 64 | 72 | 72 | 18620 | 80 | 10960 | 0.32 |
| 13 | 400 | 50 | 600 | 262 | 0.43 | 60 | 68 | 67 | 17905 | 0 | 10535 | 0.00 |
| 14 | 400 | 50 | 600 | 311 | 0.50 | 59 | 66 | 66 | 16705 | 15 | 9835 | 0.06 |
| 15 | 400 | 50 | 600 | 350 | 0.57 | 58 | 65 | 66 | 15455 | 30 | 9100 | 0.12 |
| 16 | 400 | 50 | 600 | 391 | 0.63 | 57 | 65 | 65 | 13965 | 45 | 8220 | 0.18 |

U = Voltage · f = Frequency · n = Speed (rpm) · $P_{ed}$ = Power consumption · I = Current draw · $LpA_{in}$ = Sound pressure level intake side · $LwA_{in}$ = Sound power level intake side
$LwA_{out}$ = Sound power level outlet side · $q_V$ = Air flow · $p_{fs}$ = Pressure increase



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com