Product Data Sheet 634/39HHU-191

ebmpapst

The engineer's choice



GREEN TECH

634/39HHU-191

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 4

3.1 Electrical Operating Data 4
3.2 Electrical Interface - Output 5
3.3 Electrical Features 6
3.4 Aerodynamics 9
3.5 Sound Data 10

4 Environment 10

4.1 General 10
4.2 Climatic Requirements 10

5 Safety 10

5.1 Electrical Safety 11
5.2 Approval Tests 11

1 General

Fan type	Fan	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air outlet over struts	
Bearing system	Stainless steel bearing	
Mounting position - shaft	Any	

2 Mechanics


2.1 General

Width	60,0 mm	
Height	60,0 mm	
Depth	25,4 mm	
Mass	0,070 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	Wire outlet corner: 30 Ncm Remaining corners: 70 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length Tolerance	L = 915 mm +- 15 mm	
Wire size (AWG)	24	
Insulation diameter	1,50 mm	



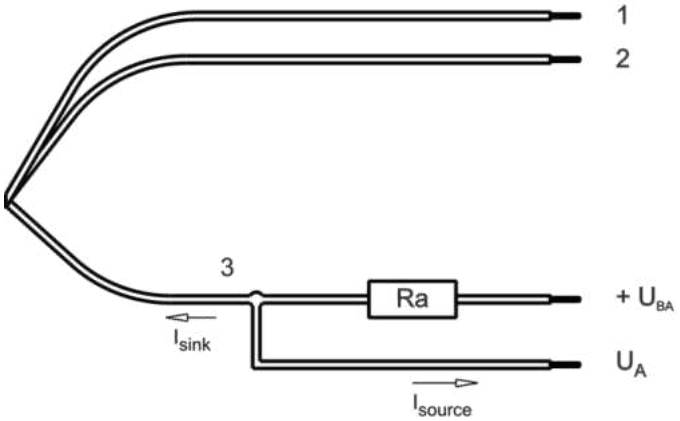

Wire	Color	Operation
1	red	+ UB
2	blue	- GND
3	white	Alarm

3 Operating Data

3.1 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.


Δp = 0: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Startup peakpulse current: Ipmax = 800mA
Startup peakpulse duration: tp = 6 x 350us (See osz-picture under "Dokumentdaten"!)

Features	Condition	Symbol	Values		
Voltage range		U	18 V		28 V
Nominal voltage		U_N		24 V	
Power consumption Tolerance	Δp = 0 0010	P	1,8 W +- 17,5 %	3,2 W +- 17,5 %	3,4 W +- 17,5 %
Current consumption Tolerance	Δp = 0 0010	I	100 mA +- 17,5 %	135 mA +- 17,5 %	120 mA +- 17,5 %
Speed Tolerance	Δp = 0 0010	n	6.750 1/min +- 12,5 %	8.500 1/min +- 5 %	8.500 1/min +- 5 %
Starting current consumption				<= 600 mA	


3.2 Electrical Interface - Output

Alarm type	/39 (low = ok, open collector)

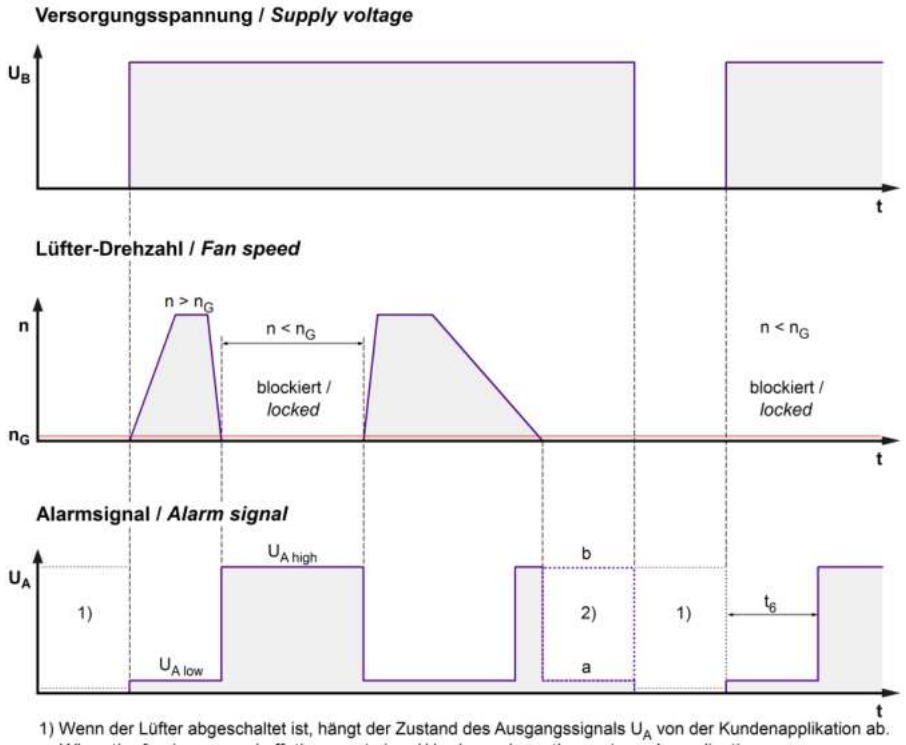

1) Wenn der Lüfter abgeschaltet ist, hängt der Zustand des Ausgangssignals U_A von der Kundenapplikation ab.
When the fan is powered off, the ouput signal U_A depends on the customer's application.
2) Für den gültigen Zustand (a oder b) siehe Alarmunterdrückung in der Tabelle.
For the valid condition (a or b) see alarm suppression in the table.


$$Ra = \frac{U_{BA} - U_{A\,low}}{I_{sink}}$$

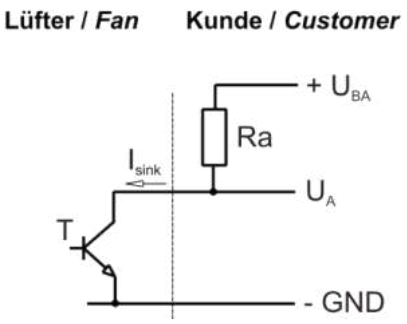

Features		Note	Values
Alarm operating voltage	U_{BA}		<= 60 V
Alarm signal Low	$U_{A\,low}$	I sink: 2 mA	<= 0,4 V
Alarm signal High	$U_{A\,high}$	I source: 0 mA	<= 60 V
Maximum sink current	I_{sink}		20 mA
External resistor		External resistor Ra from UBA to UA required. All voltage measured to GND.	
Alarm start-up delay time	t_6		<= 15 s
Alarm trip speed limit	n_G		0 1/min
Alarm at sense failure		No	
Alarm latch		No	
Alarm isolated from motor		No	


3.3 Electrical Features


Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at U_N	Rectifying diode I_F < 200 uA	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 600 mA	
Clock signal at locked rotor	t_3 / t_4 typical: 0,85 s / 11,5 s	

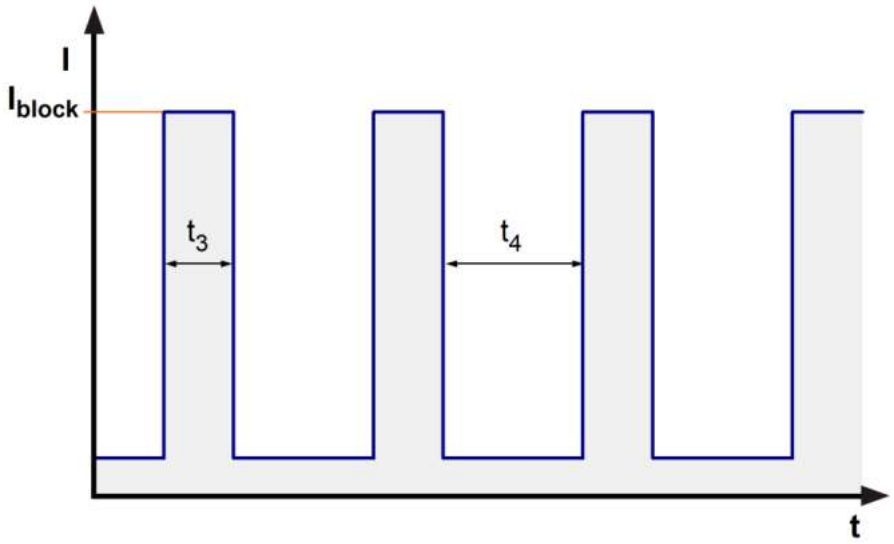


The fan has a special blocking cycle. The behavior of this cycle differs marginally between a blocked rotor when the fan gets started and a blocked rotor during the running operation of the fan. The following figures describe this characteristic.

1. Blocked rotor at the start of the fan

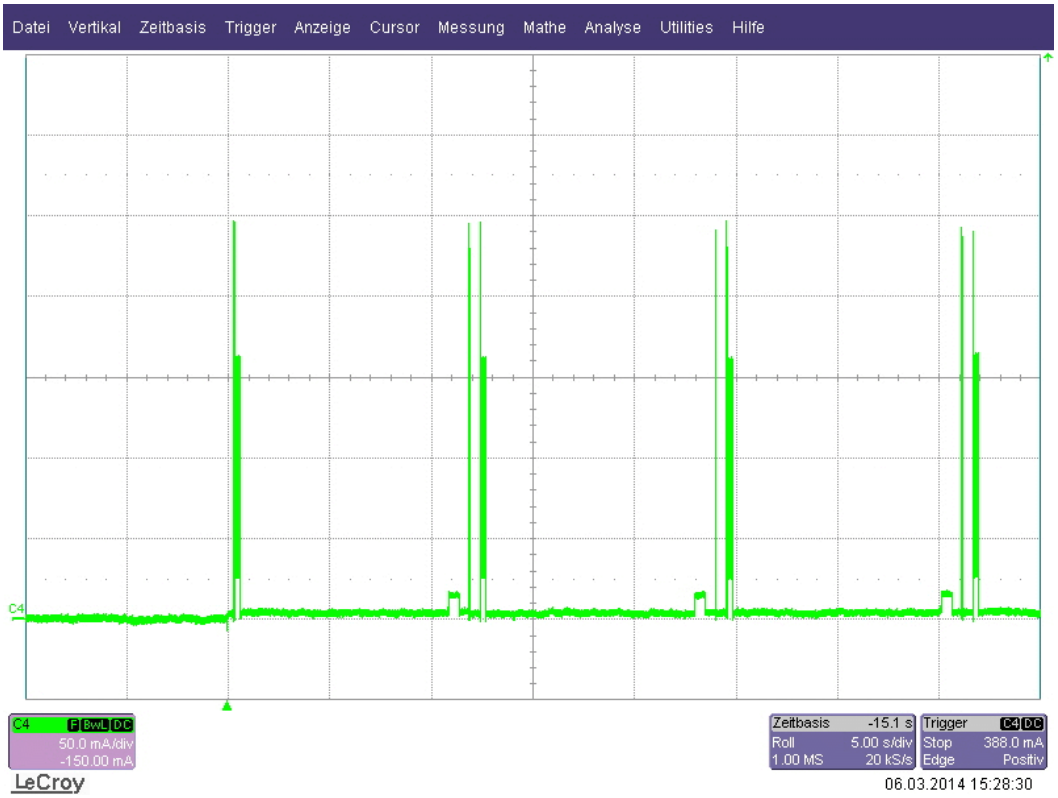

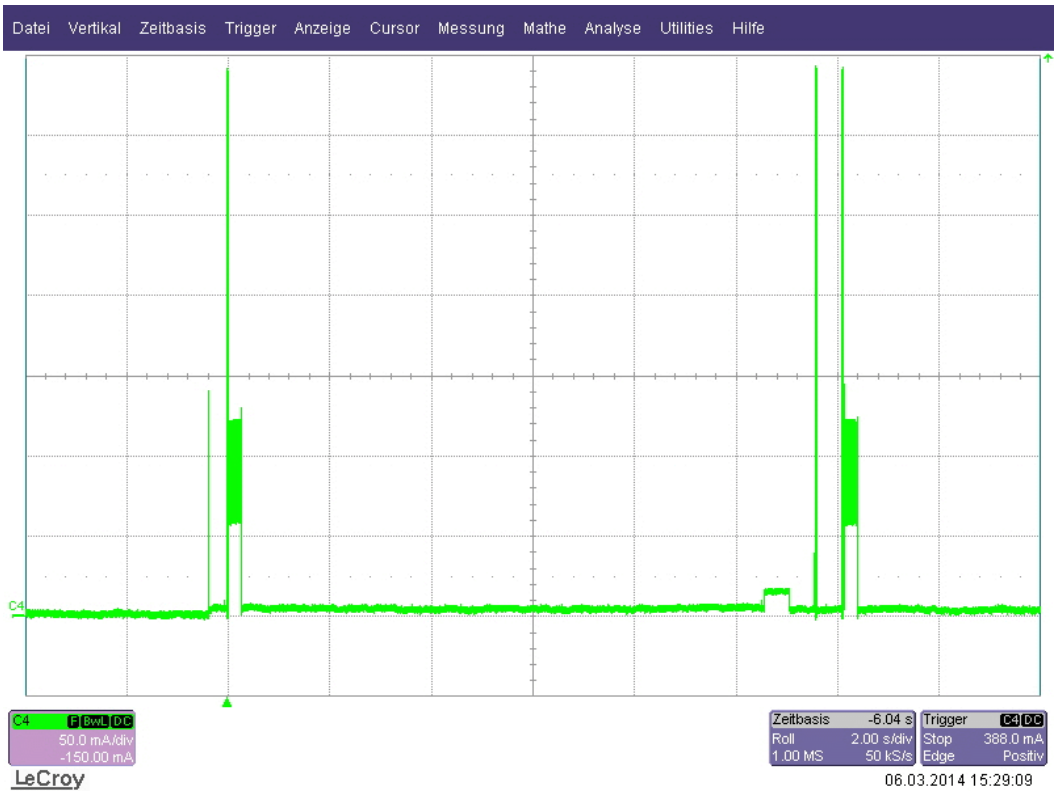

2. Blocked rotor after the normal operation of the fan

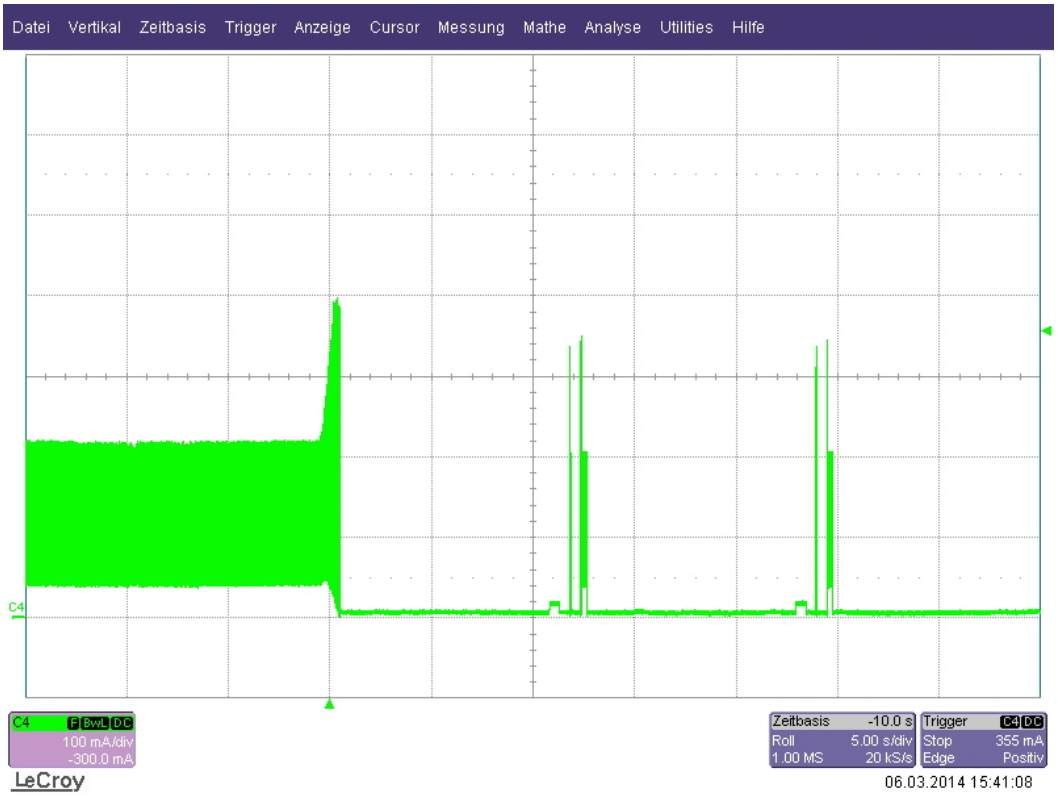
Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe
C4
C4 BwL DC
100 mA/div
-300.0 mA
Zeitbasis -10.0 s
Roll 5.00 s/div
1.00 MS 20 kS/s
Trigger C4 DC
Stop 355 mA
Edge Positiv
LeCroy
06.03.2014 15:41:08


Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe
C4
C4 BwL DC
100 mA/div
-300.0 mA
Zeitbasis -600 ms
200 ms/div
2.00 MS 1.0 MS/s
Trigger C4 DC
Stop 353 mA
Edge Positiv
LeCroy
06.03.2014 15:42:45


3.4 Aerodynamics

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

8.500 1/min at free air flow

Max. free-air flow (Δp = 0 / V̇ = max.)	58,0 m3/h	
Max. static pressure (Δp = max. / V̇ =0)	215 Pa	

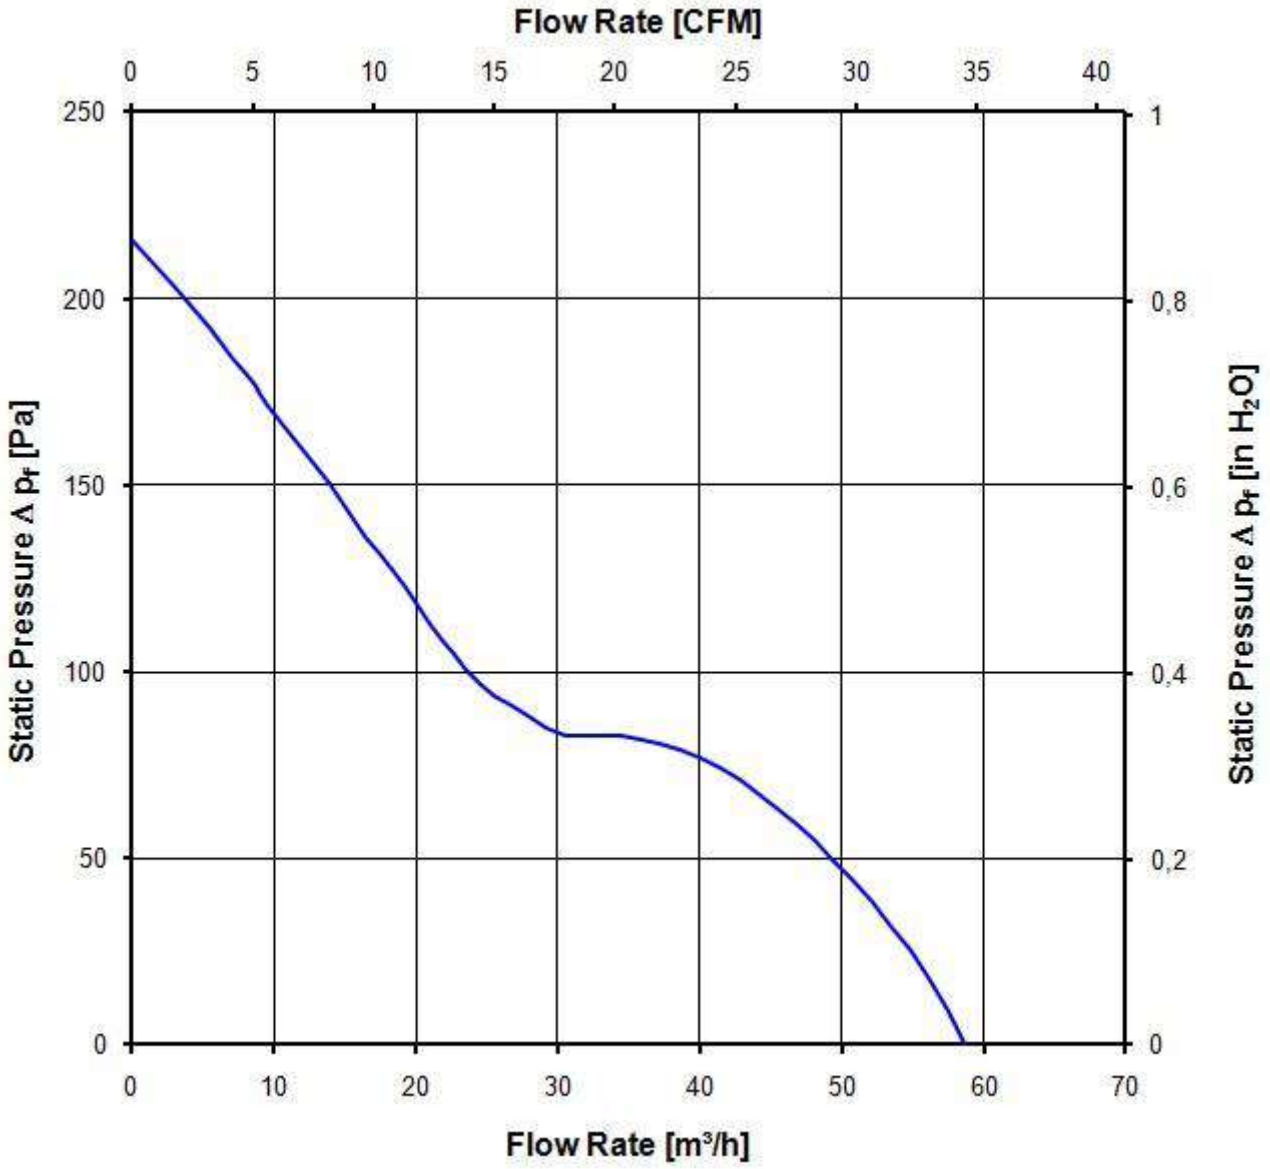

3.5 Sound Data

Measurement conditions:	Sound pressure level: 1 meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

8.500 1/min at free air flow

Optimal operating point	40,0 m3/h @ 69 Pa	
Sound power level at the optimal operating point	6,1 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	44,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

IP-protection type (certified)	IP 68 (for fan only, not for connector if applicable) **)	
Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Salt fog requirements	Salt fog, cylic, in operation; according to DIN EN 60068-2-52; 10 cycles	

Permitted application area:
The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.

Pollution degree 4 (according DIN EN 60664-1)
It occurs permanent conductivity caused by conductive dust, rain or moisture.

**) The specification of the IP protection refers to the conditions mentioned in certification of the fan. The above mentioned short description of the protection scope is not final. For detailed information of the respective protection scope and definitions, see certification as well as DIN EN 60529 (protection by housings) and ISO 20653 (for vehicles) with the letter K.

Short description of the IP-protection type:
Solid particle Protection: Dust tight.
Protection against deliberate contact: Protected against contact to hazardous parts with a wire.
Protection against water: The fan test according to IP68 (Based on IEC 60529), is conducted in non-operating mode. The fan is tested by a complete immersion in water for a period of 2h at a water-level of 1,2m. Electrical connections are not immersed since they are customer specific.

Please require severity levels and specification parameters from the responsible development departments.**Safety**


5.1 Electrical Safety


Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Not applicable

Anzahl und Länge der Litzen siehe BV - Blatt 1
length and number of wires see design specification page 1

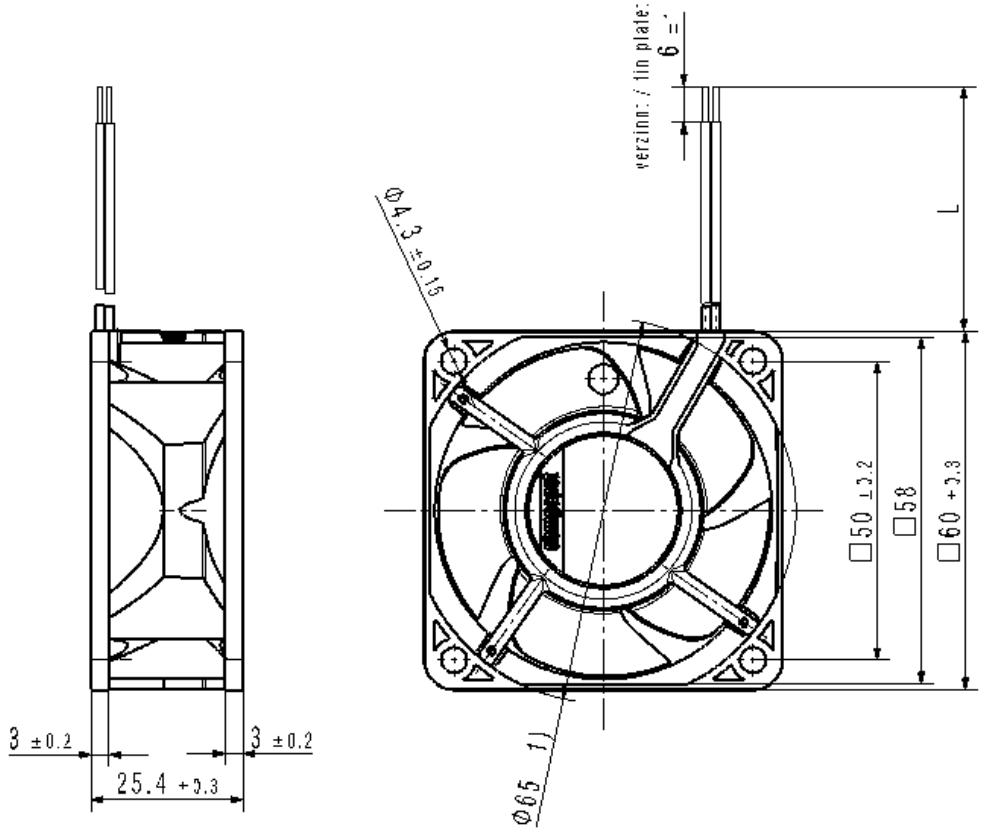

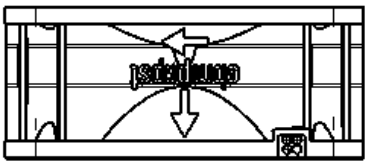

1) Maße fuer Montageward / measures for mounting plate
Axia spie be Kugel agerung (K): 0 (mi: Federausgleich) /
by ballbearing (K): 0 (by pre-loaded spring)

Ä4-Status/State	Aend.-Nr./ Change No.	CATIA-System-Version/ CATIA-System-Version	CAD-Umgebung/ CAD-Environment	Werkstoff / Material:	Volumen / Volume (cm^3):
					Gewicht / Mass (g):
	92325380C* GFRI00-			Artikel / Title:	
	3D Referenzmodell / 3D Referenzmodel				
Tolerierung / Tolerances:		Datum	Name		
	Gesch./ Drawn				
Allgemeintoleranzen / Gen. Tolerances:	Gepr./ Checked			Zchg.-Nr./ Drawing No:	Ers.f.Zchg. / Replaces:
	Freig./ Release				
ebmpapst				Dok.-Art/Typ/ Type of Document	Teildok.-Nr./ (Blatt/Page)
ebm-papst St.Georgen GmbH & Co KG				Index / Index	Format / Size:
					Maßstab/Scale

Copying of this document, and giving it others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN 34 beachten.
Refer to protection notice DIN 34 !