R3G250-RO40-A9

EC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	**R3G250-RO40-A9**
Motor	**M3G084-DF**

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min^{-1}	3650
Power consumption	W	480
Current draw	A	2.1
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	60.4	48.1
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		74.3	62
05 Variable speed drive		Yes	

09 Power consumption P_{ed}	kW	0.47
09 Air flow q_v	m^3/h	1200
09 Pressure increase p_{fs}	Pa	784
10 Speed (rpm) n	min^{-1}	3635
11 Specific ratio*		1.01

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = 1 + p_{fs} / 100 000 Pa

LU-131738

EC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description


Weight	4.1 kg
Fan size	250 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F3-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Tach output - Cable break detection with control line - Motor current limitation - PFC, active - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 55022 (Class B)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	5C; CCC; C22.2 No.77 + CAN/CSA-E60730-1

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

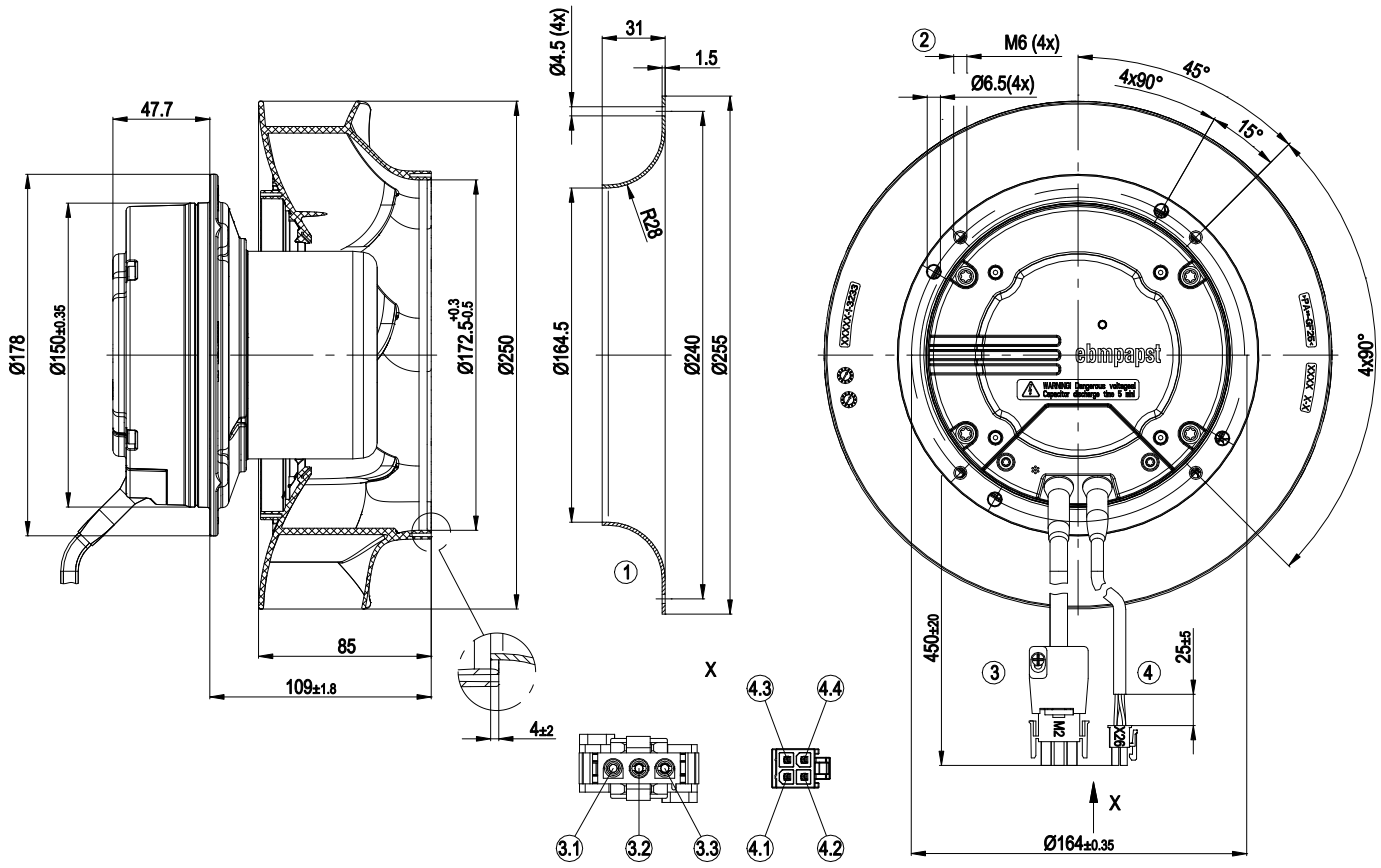


1	Accessory part: inlet ring 96359-2-4013 not included in scope of delivery
2	Max. clearance for screw 10 mm
3	Cable PVC AWG 18 with 3-pole connector housing AMP 350766-4 with AMP plug pin 1x 350654-1, 2x 926883-1 and AMP strain relief 641945-1
3.1	PE (green-yellow)
3.2	N (blue)
3.3	L (black)
4	Cable PVC AWG 22 with 4-pole connector housing Molex 39-01-2045 with Molex socket 39-00-0038
4.1	0-10 V (yellow)
4.2	Tach (white)
4.3	10 VDC (red)
4.4	GND (blue)

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward-curved, single-intake

Connection diagram

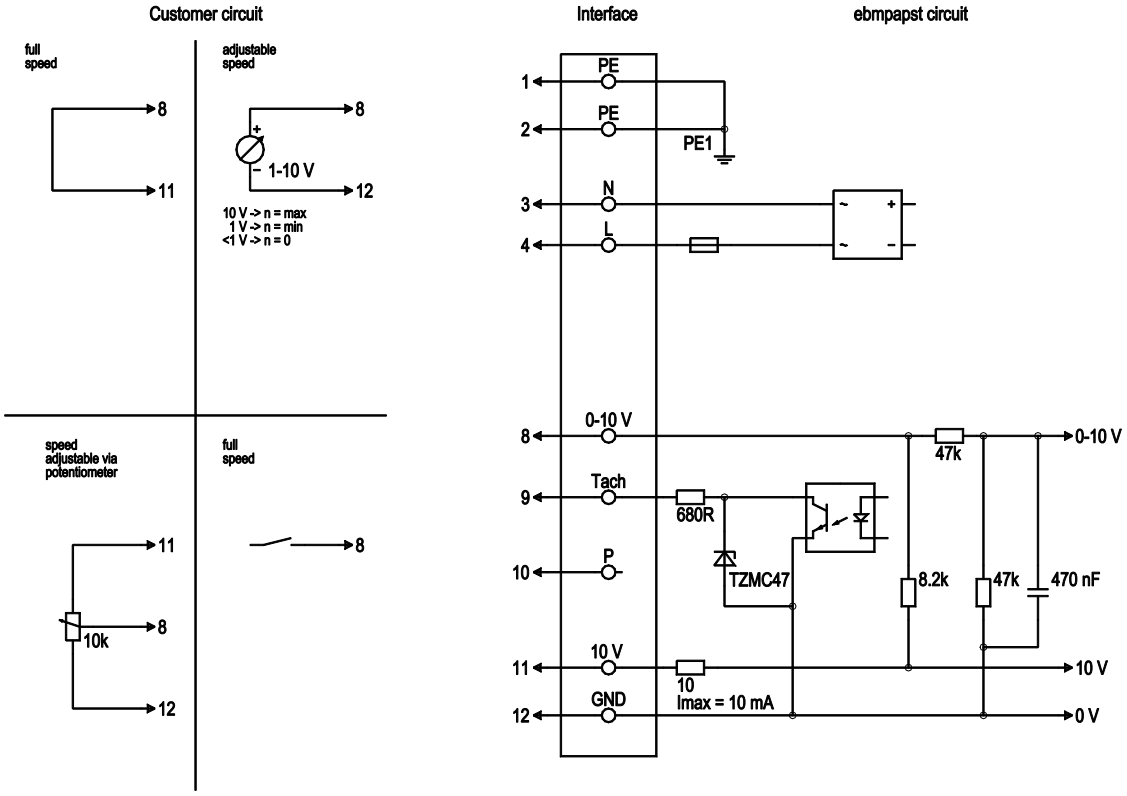


No.	Conn.	Designation	Color	Function/assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	N	blue	Power supply, neutral conductor, voltage range see nameplate, 50/60 Hz
1	4	L	black	Power supply, phase, voltage range see nameplate, 50/60 Hz
2	8	0-10V	yellow	Control input, set value 0-10 VDC, full speed with open control input, impedance 100 kohms, SELV
2	9	Tach	white	Tach output: Open collector, 1 pulse per revolution, electrically isolated, Isink max. 10 mA
2	10	P		not used
2	11	10 VDC	red	Voltage output 10 VDC (+/- 3%), max. 10 mA, power supply for ext. devices (e.g. potentiometers), SELV
2	12	GND	blue	Reference ground for control interface, SELV

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 50 Hz

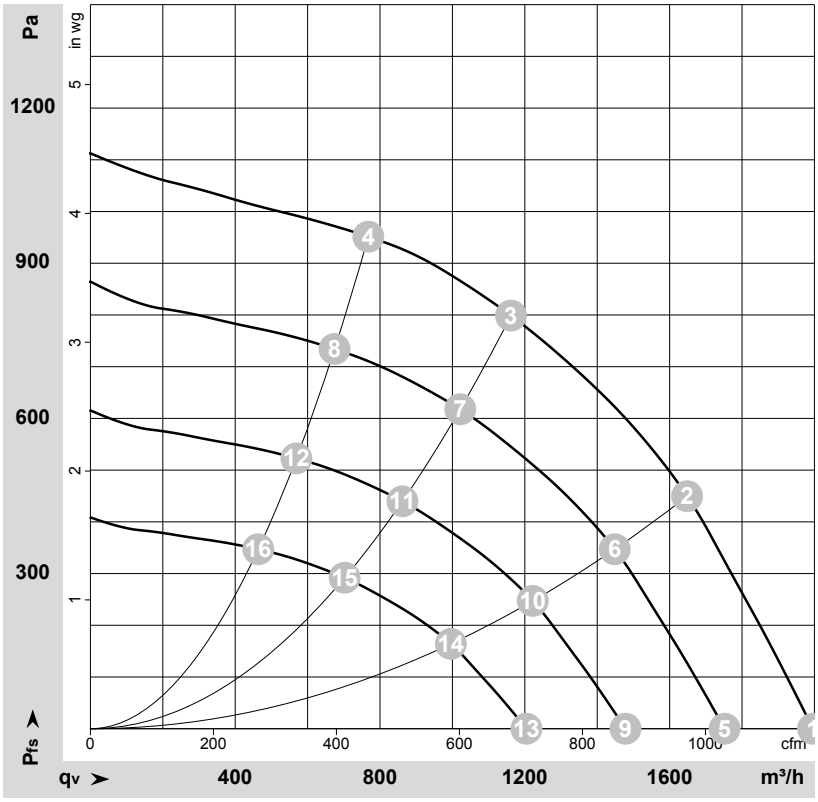

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-131738-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P_{ed}	I	LpA_{in}	LwA_{in}	q_V	p_{fs}	q_V	p_{fs}
	V	Hz	min^{-1}	W	A	dB(A)	dB(A)	m^3/h	Pa	cfm	inH2O
1	230	50	3650	382	1.68	76	85	1995	0	1175	0.00
2	230	50	3650	447	1.96	71	79	1650	450	970	1.81
3	230	50	3650	480	2.10	69	77	1160	800	685	3.21
4	230	50	3650	432	1.90	73	82	770	950	450	3.81
5	230	50	3200	258	1.14	73	81	1750	0	1030	0.00
6	230	50	3200	303	1.33	68	76	1450	351	850	1.41
7	230	50	3200	324	1.42	65	73	1020	619	600	2.49
8	230	50	3200	293	1.29	70	78	675	735	395	2.95
9	230	50	2700	155	0.68	69	77	1480	0	870	0.00
10	230	50	2700	182	0.80	64	72	1220	250	720	1.00
11	230	50	2700	195	0.85	61	69	860	440	505	1.77
12	230	50	2700	176	0.77	66	74	570	523	335	2.10
13	230	50	2200	84	0.37	64	72	1205	0	710	0.00
14	230	50	2200	99	0.43	59	67	995	166	585	0.67
15	230	50	2200	105	0.46	56	64	700	292	415	1.17
16	230	50	2200	95	0.42	61	69	465	347	275	1.39

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com