K3G400-AC30-62

EC centrifugal module

backward-curved, single-intake

with support plate

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	**K3G400-AC30-62**
Motor	**M3G084-FA**

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min^{-1}	1350
Power consumption	W	383
Current draw	A	1.7
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	58.4	47.1
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		73.3	62
05 Variable speed drive		Yes	

09 Power consumption P_{ed}	kW	0.38
09 Air flow q_v	m^3/h	2390
09 Pressure increase p_{fs}	Pa	300
10 Speed (rpm) n	min^{-1}	1370
11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = 1 + p_{fs} / 100 000 Pa

LU-73076

EC centrifugal module

backward-curved, single-intake

with support plate

Technical description

Weight	9.9 kg
Fan size	400 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Support plate material	Sheet aluminum
Spacer material	Aluminum
Inlet nozzle material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F0
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - Integrated PID controller - Motor current limitation - PFC, active - RS-485 ebmBUS - Soft start - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	C22.2 No.77 + CAN/CSA-E60730-1; UL1004-3 +60730


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal module

backward-curved, single-intake

with support plate

Product drawing

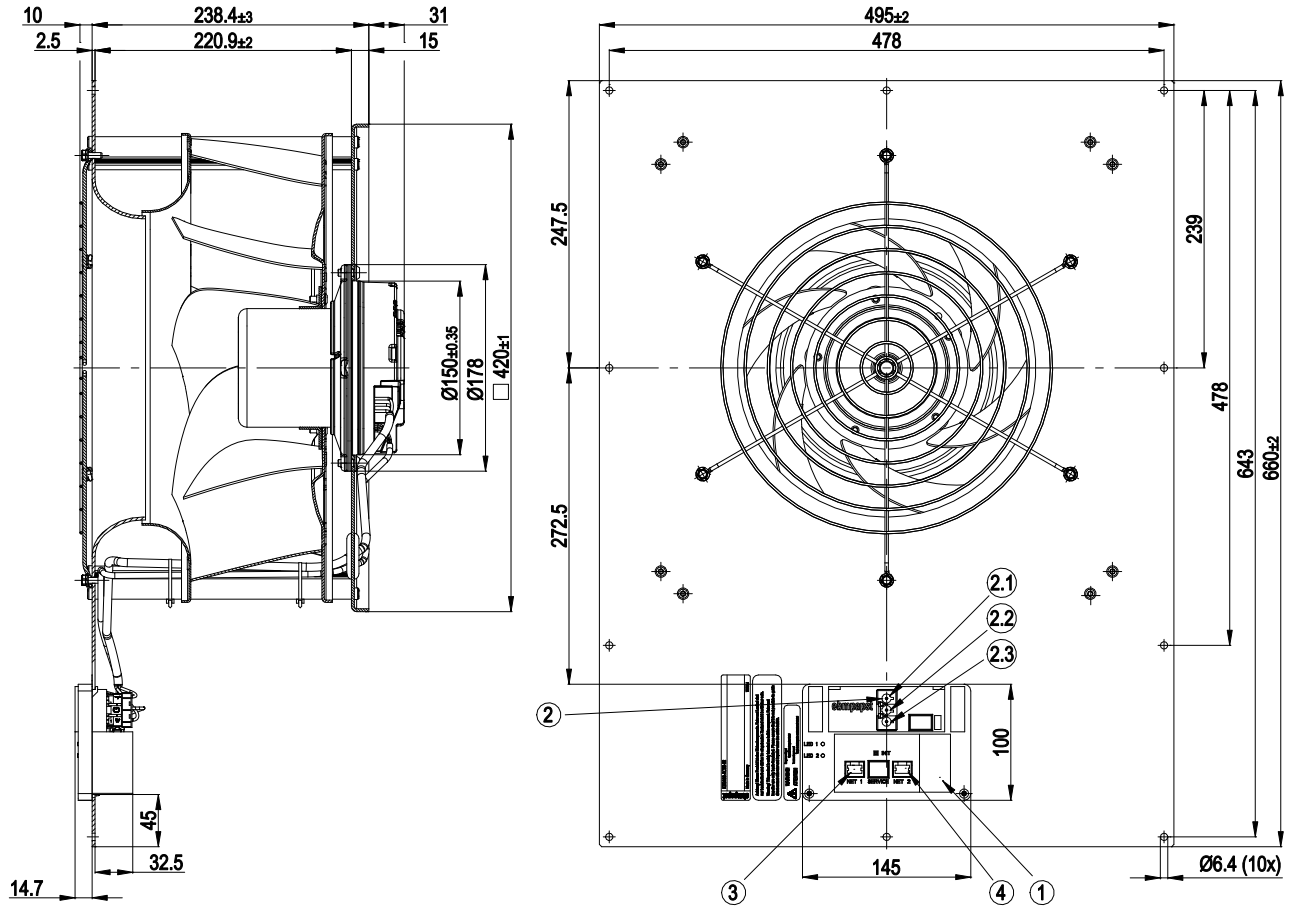

1	RS485 terminal box
2	Connector housing Wieland GST18/3 (art. no. 92.032.9058.1)
2.1	N
2.2	PE
2.3	L
3	RJ45 jack (RSB pin 5 / RSA pin 6)
4	RJ45 jack (RSB pin 5 / RSA pin 6)


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal module

backward-curved, single-intake

with support plate

Connection diagram

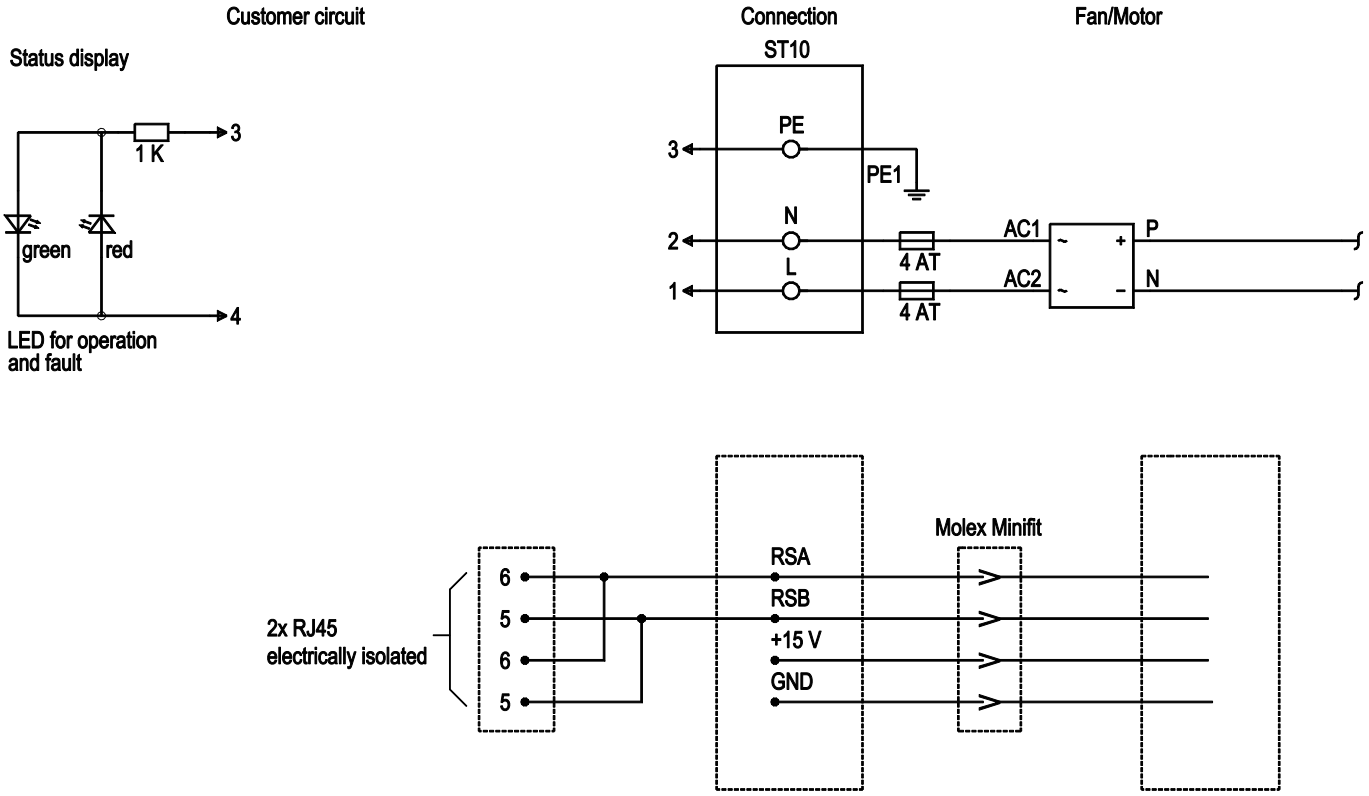

No.	Conn.	Designation	Function/assignment
3	PE		Protective earth
2	N		Supply connection, power supply, neutral conductor, voltage range see nameplate, 50/60 Hz
1	L		Supply connection, power supply, phase, voltage range see nameplate, 50/60 Hz
6	RSA		Bus connection RS485, RSA, ebmBUS; SELV
5	RSB		Bus connection RS485, RSB, ebmBUS; SELV


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal module

backward-curved, single-intake

with support plate

Curves: Air performance 50 Hz

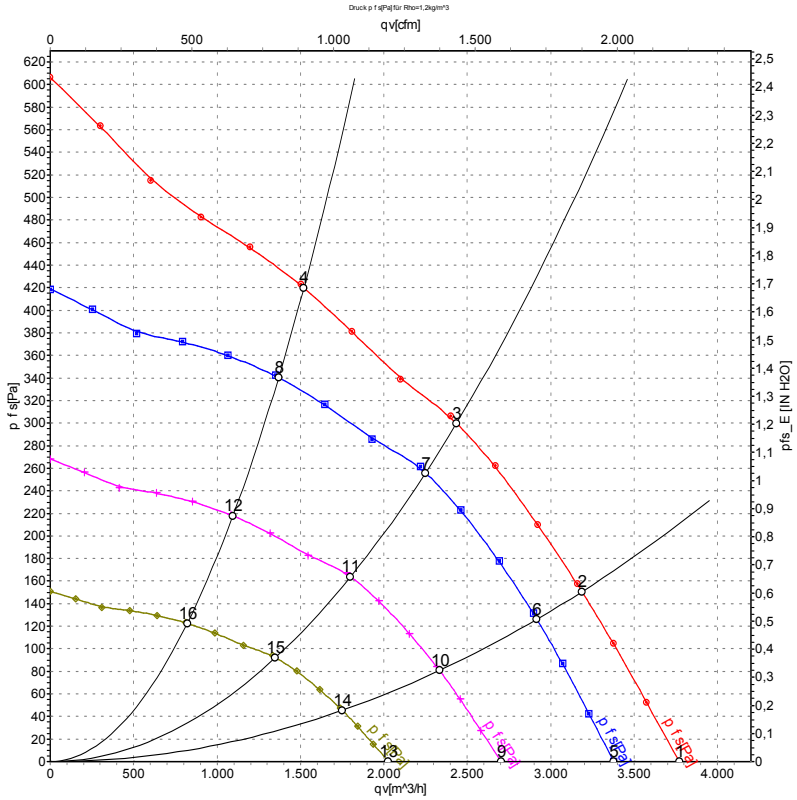

Measurement: LU-69554-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P_{ed}	I	q_V	p_{fs}	q_V	p_{fs}
	V	Hz	min^{-1}	W	A	m^3/h	Pa	cfm	inH2O
1	230	50	1395	339	1.50	3770	0	2220	0.00
2	230	50	1365	370	1.63	3185	150	1875	0.60
3	230	50	1350	383	1.70	2435	300	1435	1.20
4	230	50	1390	345	1.52	1520	420	895	1.69
5	230	50	1250	244	1.08	3375	0	1990	0.00
6	230	50	1250	283	1.25	2915	126	1715	0.51
7	230	50	1250	302	1.34	2250	257	1325	1.03
8	230	50	1250	252	1.11	1370	341	805	1.37
9	230	50	1000	125	0.55	2700	0	1590	0.00
10	230	50	1000	145	0.64	2335	81	1375	0.33
11	230	50	1000	155	0.68	1800	165	1060	0.66
12	230	50	1000	129	0.57	1095	218	645	0.88
13	230	50	750	53	0.23	2025	0	1190	0.00
14	230	50	750	61	0.27	1750	46	1030	0.18
15	230	50	750	65	0.29	1350	93	795	0.37
16	230	50	750	54	0.24	820	123	485	0.49

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com