Product Data Sheet 6248N

ebmpapst

Die Wahl der Ingenieure



GREEN TECH

6248N

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 5

3.1 Operating Data - Electrical Interface - Input 5
3.2 Electrical Operating Data 6
3.3 Operating Data - Electrical Interface - Output 7
3.4 Electrical Features 7
3.5 Aerodynamics 8
3.6 Sound Data 9

4 Environment 9

4.1 General 9
4.2 Climatic Requirements*) 9

5 Safety 10

5.1 Electrical Safety 10
5.2 Approval Tests 10

6 Reliability 10

6.1 General 10

1 General

Fan type	Axial fan	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position	Any	

2 Mechanics


2.1 General

Depth	51,0 mm	
Diameter	172,0 mm	
Mass	0,780 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	wire outlet corner: 600 Ncm remaining corners: 600 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Plug / flat pins	
Lead wire length Tolerance	--	
Wire size (AWG)	--	
Insulation diameter	--	
Contact	See drawing	




- GND
+ UB

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	None

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal;warm-up time before measuring 5 minutes (unless otherwise specified).In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	28,0 V		60,0 V
Nominal voltage	$\Delta p = 0$	U_N		48,0 V	
Power consumption Tolerance	$\Delta p = 0$ 0001	P	4,75 W +- 20,0 %	16,55 W +- 20,0 %	25,2 W +- 25,0 %
Current consumption Tolerance	$\Delta p = 0$ 0001	I	170 mA +- 20,0 %	345 mA +- 20,0 %	420 mA +- 25,0 %
Speed Tolerance	$\Delta p = 0$ 0001	n	2.100 1/min +- 12,5 %	3.400 1/min +- 10,0 %	4.000 1/min +- 10,0 %
Starting current consumption				1.500 mA	

No inrush current means: Inrush current is mainly affected by length and kind of connecting line. 39uF


3.3 Operating Data - Electrical Interface - Output

Tacho type	None

Alarm type	None

3.4 Electrical Features

Electronic function	None	
Reversed polarity protection Max. residual current at Un	Rectifying diode IF <= 10 mA	
Locked rotor protection	Auto restart	
Locked rotor current at Un	approx. 1.500 mA	
Clock signal t3/t4 at locked rotor	Typical: 1,4 s / 5,3 s	

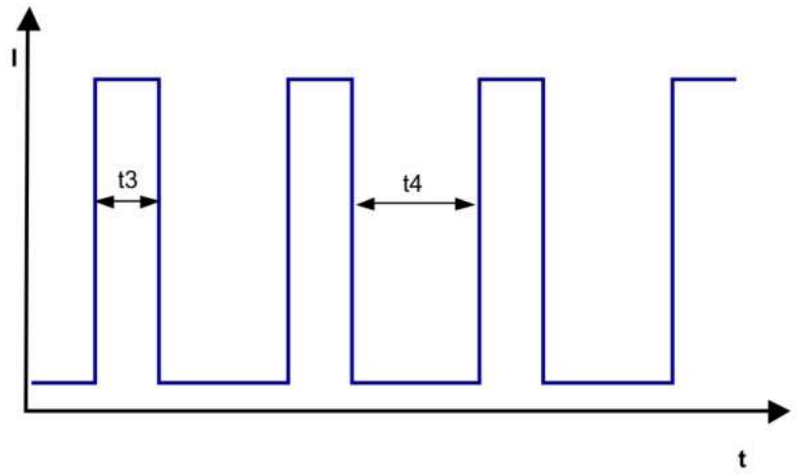


3.5 Aerodynamics

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

3.400 1/min at free air flow

Max. free-air flow (Δp = 0 / V̇ = max.)	390,0 m3/h	
Max. static pressure (Δp = max. / V̇ =0)	180 Pa	

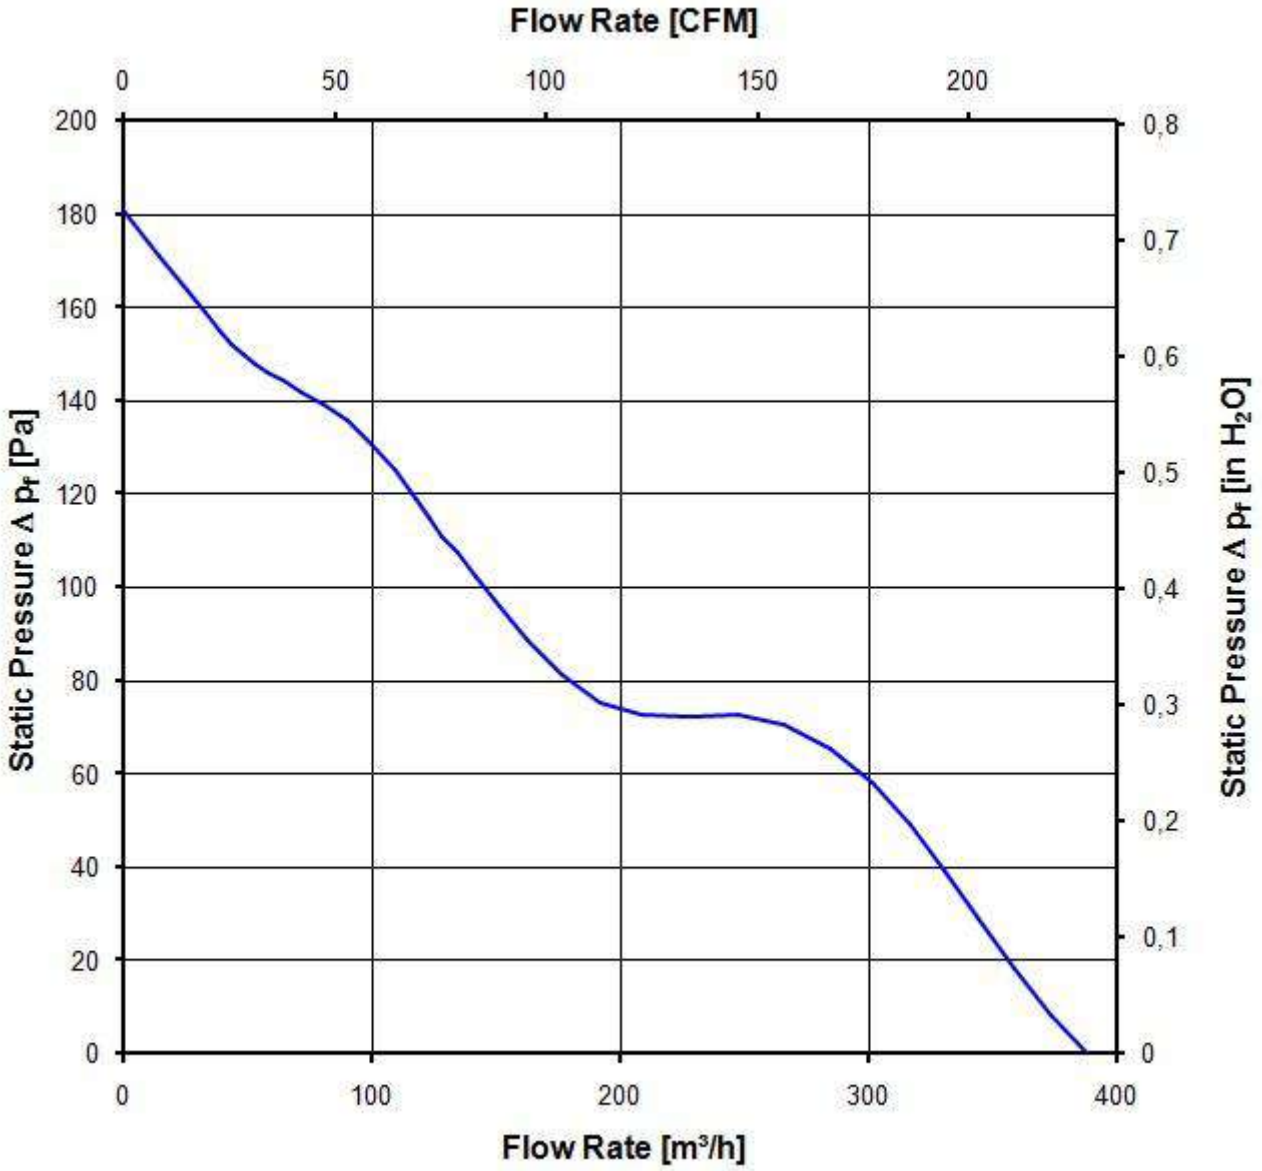

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

3.400 1/min at free air flow

Optimal operating point	285,0 m3/h @ 58 Pa	
Sound power level at the optimal operating point	6,1 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	55,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	72 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

*) Permittet application area:
The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)
There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	III	

5.2 Approval Tests


CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL audited by CSA according to UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

6 Reliability

6.1 General


Life expectancy L10 at TU = 40 °C	75.000 h	
Life expectancy L10 at TU max.	35.000 h	

Schutzvermerk nach DIN 34, ISO 16016 beachten!
Copies of this document, any rights arising and the user communication of the contents hereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

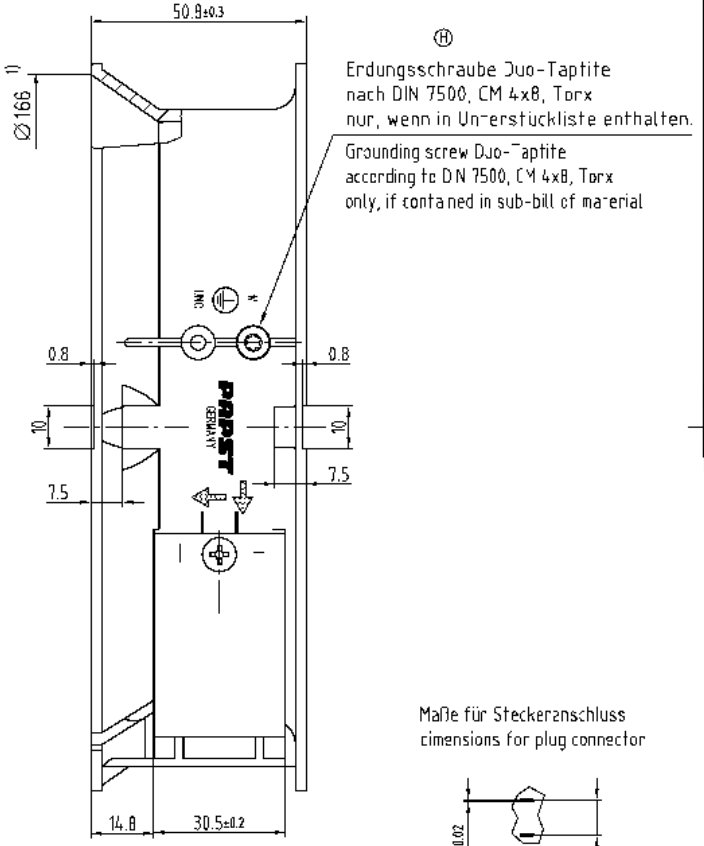


Ⓗ
Erdungsschraube Duo-Taptite
nach DIN 7500, CM 4x8, Torx
nur, wenn in Unterstückliste enthalten.

Grounding screw Duo-Taptite
according to DIN 7500, CM 4x8, Torx
only, if contained in sub-bill of material

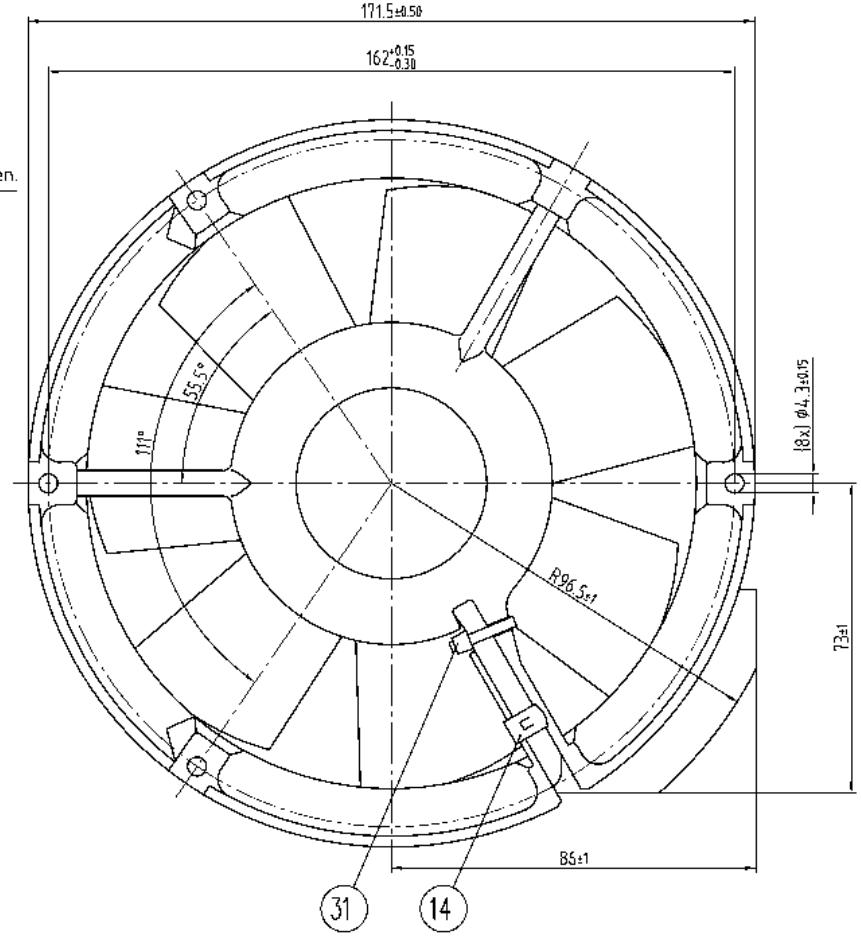

Maße für Steckeranschluss
dimensions for plug connector



- Axialspiel: mit Feder spielfrei verspannt
1) Maße für Montagewand

- without axial clearance by a pre-loaded spring
1) dimensions for assembly wall

SAP-Status/Code	Kund.-Vorz./Change-No.	Ers.f./Old-Version	ebmpapst CAD Übernahme/ CAD Environment	Werkstoff/Material	Volumen/Volume [cm³]
		Ref.-Maße	Name/Name		Gewicht/Mass [g]
Toleranzen/Tolerances:		Bearb./ Drawn		Artikel/Title	
Allgemeintoleranz/Gen. tolerances		Gepr./ Checked			
		Freig./ Release			
ebmpapst		Zeichn.-Nr./ Drawing-No.			Ers.f./Orig./Replaces
ebm-papst St. Georgen GmbH & Co. KG		Dokumentart/Type of Document	Blattformat/Size [DIN/ISO]	Blatt/Sheet	Format/Size	Massstab/Scale