Product Data Sheet | 6224 NI



The engineer's choice

ebmpapst

6224 NI

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 4

3.1 Operating Data - Electrical Interface - Input 4
3.2 Electrical Operating Data 4
3.3 Operating Data - Electrical Interface -Output 6
3.4 Electrical Features 6
3.5 Aerodynamic 7
3.6 Sound Data 8

4 Environment 8

4.1 General 8
4.2 Climatic requirements*) 8

5 Safety 9

5.1 Electrical Safety 9
5.2 Approval Tests 9

6 Reliability 9

6.1 General 9

1 General

Fan type	Fan	
Rotational direction looking at rotor	counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position	any	


2 Mechanics

2.1 General

Depth	51,0 mm	
Diameter	172,0 mm	
Weight	0,780 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	wire outlet corner: 600 Ncm remaining corners: 600 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Plug	
Length of lead wire Tolerance		
Wire gauge (AWG)		
Insulation diameter		
Contact	see drawing	


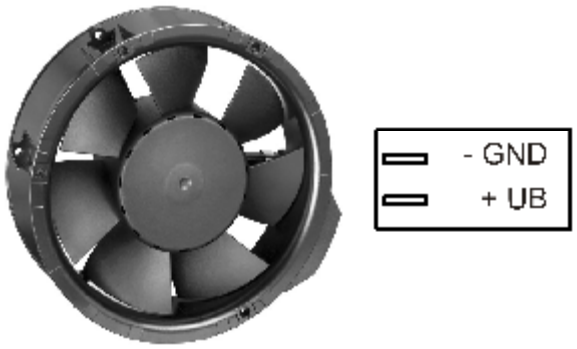


3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	Internal Temperature Sensor

Features

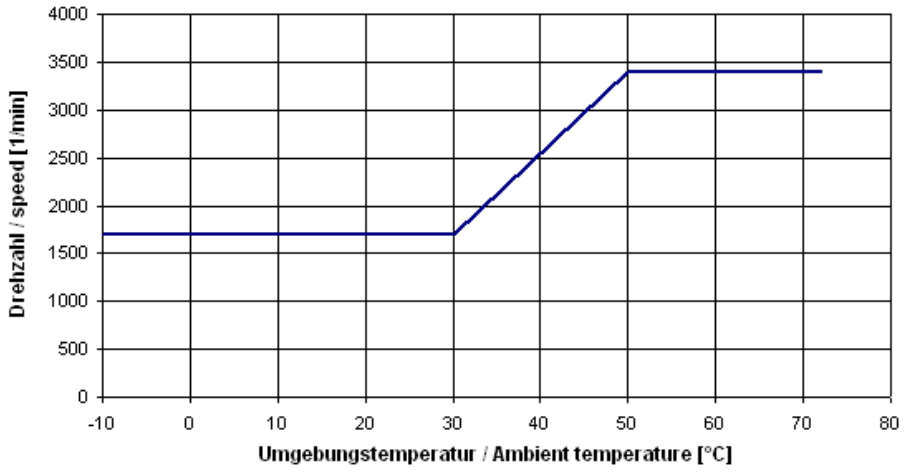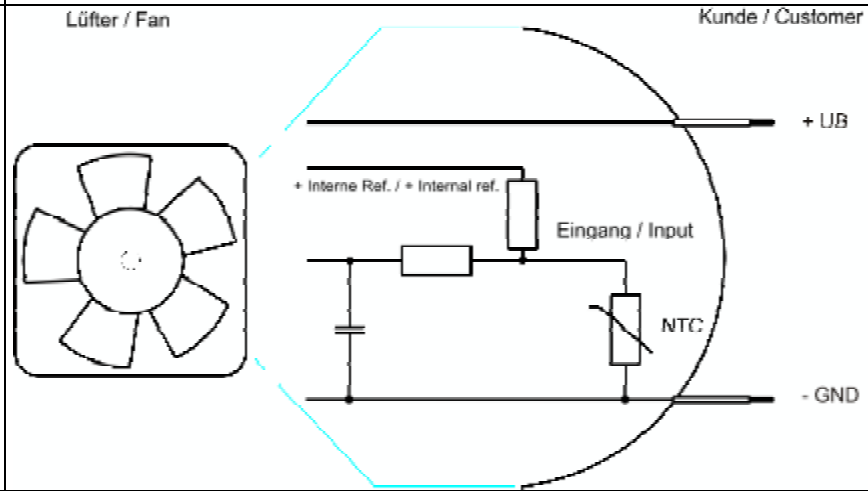Characteristics	
Schematics	

Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal;warm-up time before measuring 5 minutes (unless otherwise specified).In the intake and outlet area should not be any solid obstruction within 0,5 m.

Δp = 0: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Name	Condition		
TU 0001	TU: >= 50 °C		
NTC 0001			

Features	Condition	Symbol	Values		
Voltage range	Δp = 0	U	12,0 V		28,0 V
Nominal voltage	Δp = 0	U_N		24,0 V	
Power consumption Tolerance	Δp = 0 TU / NTC 0001	P	2,8 W +- 15,0 %	13,6 W +- 15,0 %	18,5 W +- 15,0 %
Current consumption Tolerance	Δp = 0 TU / NTC 0001	I	230 mA +- 15,0 %	565 mA +- 15,0 %	660 mA +- 15,0 %
Speed Tolerance	Δp = 0 TU / NTC 0001	n	1.800 1/min +- 10,0 %	3.400 1/min +- 8,0 %	3.800 1/min +- 10,0 %
Starting current consumption				<= 1.000 mA	
Inrush current				4.000 mA	

Tu >= 50 °C or broken Sensor.

Name	Condition		
TU 0002	TU: <= 30 °C		
NTC 0002			

Features	Condition	Symbol	Values		
Voltage range	Δp = 0	U	12,0 V		28,0 V
Nominal voltage	Δp = 0	U_N		24,0 V	
Power consumption Tolerance	Δp = 0 TU / NTC 0002	P	2,6 W +- 15,0 %	3,2 W +- 15,0 %	3,5 W +- 15,0 %
Current consumption Tolerance	Δp = 0 TU / NTC 0002	I	220 mA +- 15,0 %	135 mA +- 15,0 %	125 mA +- 15,0 %
Speed Tolerance	Δp = 0 TU / NTC 0002	n	1.600 1/min +- 10,0 %	1.700 1/min +- 8,0 %	1.700 1/min +- 10,0 %


3.3 Operating Data - Electrical Interface -Output

Tacho type	None

Alarm type	None

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at Un	Rectifying diode IF <= 10 mA	
Locked rotor protection	Auto restart	
Locked rotor current at Un	approx. 1.000 mA	
Clock signal t3/t4 at locked rotor	Typical: 0,5 s / 5,0 s	

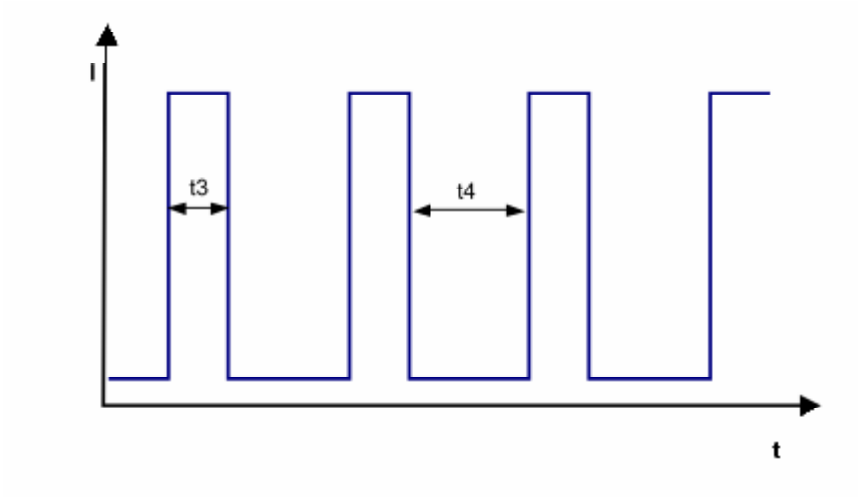


3.5 Aerodynamic

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

3.400 1/min at free air flow	TU >= 50 °C		
Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)		390,0 m3/h	
Max. static pressure (Δp = max. / $\dot{V}$ =0)		180 Pa	

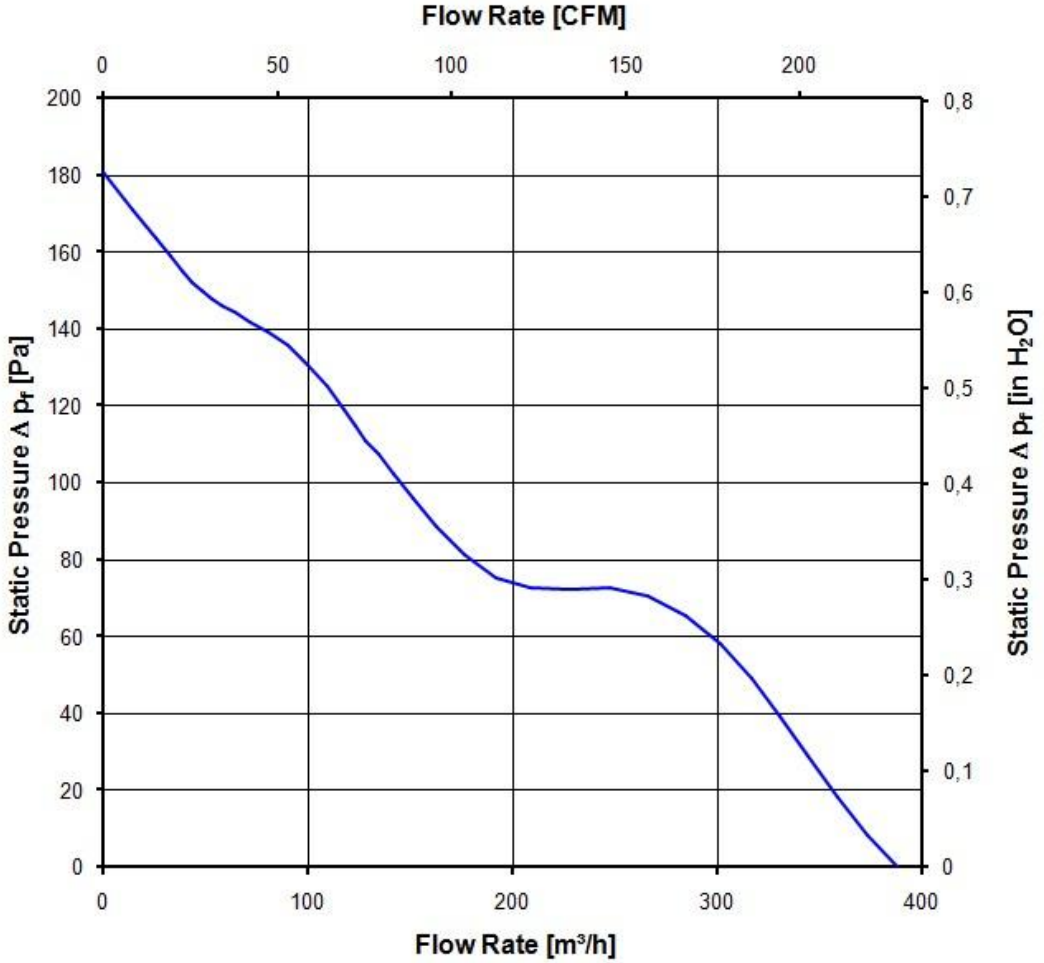

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

3.400 1/min at free air flow	TU >= 50 °C		

Optimal operating point	285,0 m3/h @ 58 Pa	
Sound power level at the optimal operating point	6,1 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	55,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-10 °C	
Max. permitted ambient temperature TU max.	72 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

*) Permittet application area:
The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)
There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.Please require severity levels and specification parameters from the responsible development departments

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests

CE	No
UL	No
VDE	No
CSA	No
CCC	No


6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	75.000 h	
Life expectancy L10 at TU max.	35.000 h	
Life expectancy L10 Delta (40 °C)	125.000 h	


Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN ISO 16016 beachten/
Refer to protection note DIN ISO 16016!

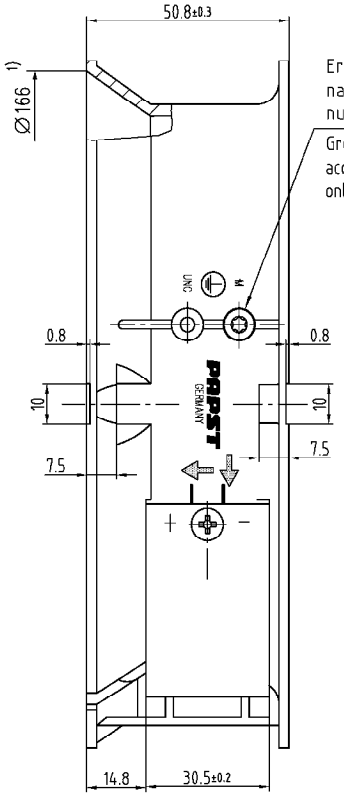


Ⓗ
Erdungsschraube Duo-Taptite
nach DIN 7500, CM 4x8, Torx
nur, wenn in Unterstückliste enthalten.

Grounding screw Duo-Taptite
according to DIN 7500, CM 4x8, Torx
only, if contained in sub-bill of material

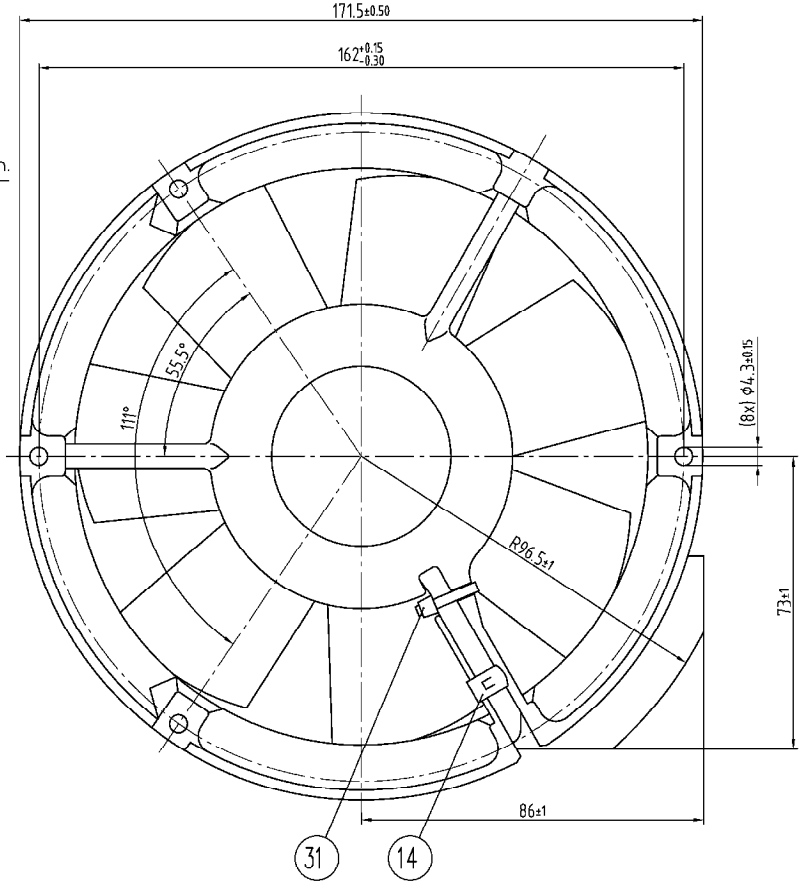

Maße für Steckeranschluss
dimensions for plug connector



- Axialspiel: mit Feder spielfrei verspannt
1) Maße für Montagewand

- without axial clearance by a pre-loaded spring
1) dimensions for assembly wall

SAP-Status/State	Aend.-Nr./Change-No.		Auto CAD-System-Version	ebmpapst CAD-Umgebung/ CAD-Environment	Werkstoff/Material:	Volumen/Volume [mm³]: Gewicht/Mass [g]:
			Datum/Date	Name/Name		
		Bearb./ Drawn			Artikel/Title	
Toleranzen/Tolerances:		Gepr./ Checked				
Allgemeintoleranzen/Gen. Tolerances:		Freig./ Releas.			Zchg.-Nr./ Drawing.-No.:	Ers.f.Zchg./ Replaces:
		ebmpapst			Dokumenttyp/Type of Document / Teildokument/Blatt/Pagel / Index/Index	Format/Size: / Massstab/scale
		ebm-papst St. Georgen GmbH & Co. KG				