

8214 J/2H4PU-208

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 4

3.1 Operating Data - Electrical Interface - Input 4
3.2 Electrical Operating Data 5
3.3 Operating Data - Electrical Interface -Output 5
3.4 Electrical Features 6
3.5 Aerodynamic 7
3.6 Sound Data 8

4 Environment 9

4.1 General 9
4.2 Climatic requirements*) 9

5 Safety 10

5.1 Electrical Safety 10
5.2 Approval Tests 10

6 Reliability 10

6.1 General 10

1 General

Fan type	Fan	
Rotational direction looking at rotor	counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position	any	

2 Mechanics


2.1 General

Width	80,0 mm	
Height	80,0 mm	
Depth	38,0 mm	
Weight	0,250 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	wire outlet corner: 50 Ncm remaining corners: 110 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Length of lead wire Tolerance	310 mm +- 10,0 mm	
Wire gauge (AWG)	26	



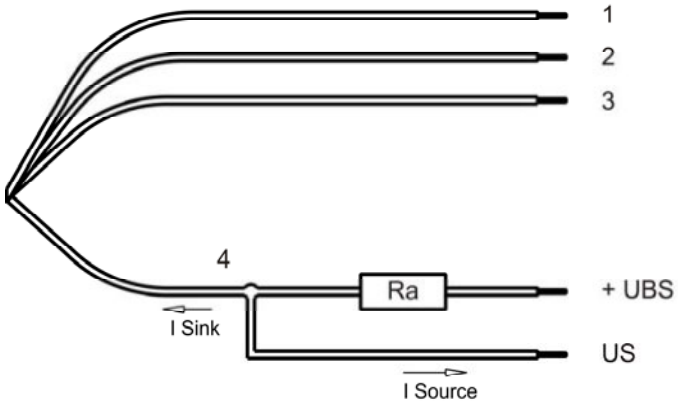

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	PWM
Wire 4	white	Tacho

The auxilliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

3 Operating Data


3.1 Operating Data - Electrical Interface - Input

Control input	PWM


Features

Inpute type	Open collector	
PWM - Frequency		1 kHz - 5 kHz

Characteristics

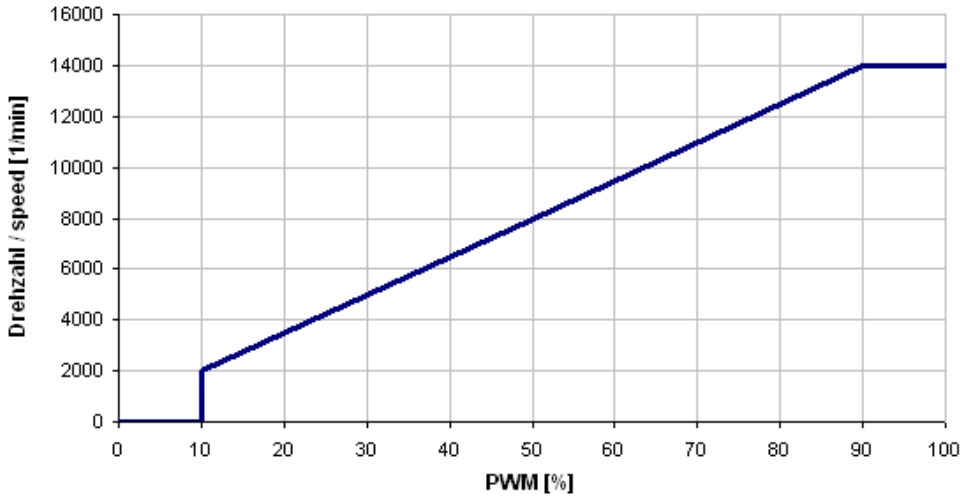

Schematics

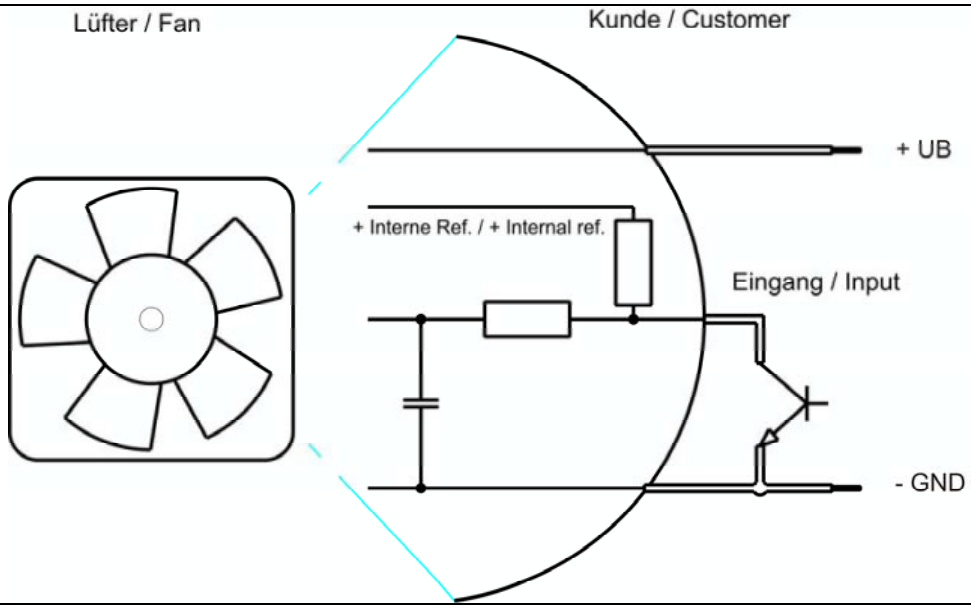

Speed controll: 0... 100 %, PWM-Low < 0,2 V

3.2 Electrical Operating Data

Measurement conditions:	Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal;warm-up time before measuring 5 minutes (unless otherwise specified).In the intake and outlet area should not be any solid obstruction within 0,5 m.


Δp = 0: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Name	Condition		
PWM 0001	PWM: 100 %;	f: 1 kHz	f: 5 kHz

Features	Condition	Symbol	Values		
Voltage range	Δp = 0	U	12,0 V		27,6 V
Nominal voltage	Δp = 0	U_N		24,0 V	
Power consumption Tolerance	Δp = 0 PWM 0001	P	8,8 W +- 17,5 %	38,0 W +- 17,5 %	39,0 W +- 25,0 %
Current consumption Tolerance	Δp = 0 PWM 0001	I	750 mA +- 17,5 %	1.600 mA +- 17,5 %	1.400 mA +- 25,0 %
Speed Tolerance	Δp = 0 PWM 0001	n	8.500 1/min +- 12,5 %	14.000 1/min +- 7,5 %	14.000 1/min +- 3,0 %
Starting current consumption				6.000 mA	
Inrush current				29.000 mA	

3.3 Operating Data - Electrical Interface -Output

Tacho type	/2 (Open collector)

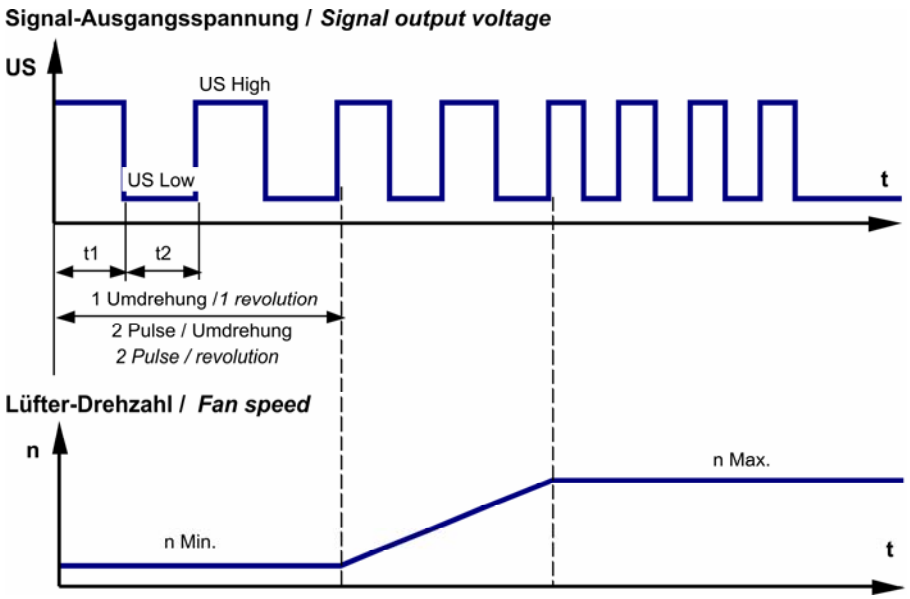

$$Ra = \frac{UBS - US\ Low}{I\ Sink}$$


Features	Note	Values
Tacho operating voltage (UBS)		<= 60,0 V
Tacho signal Low	I sink: 2 mA	<= 0,4 V

Tacho signal High	I source: 0 mA	<= 60,0 V
Maximum sink current		<= 4 mA
External resistor	External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency	(2 x n) / 60	
Tacho isolated from motor	No	
Slew rate		=> 0,5 V/us

Alarm type	None

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at Un	Rectifying diode IF <= 150 uA	
Locked rotor protection	Auto restart	
Locked rotor current at Un	approx. 6.000 mA	
Clock signal t3/t4 at locked rotor	Typical: 0,5 s / 10,0 s	

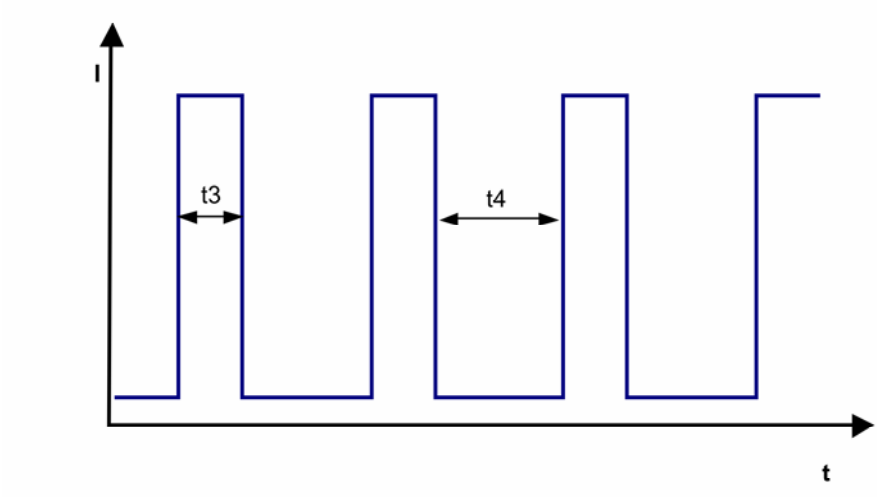


3.5 Aerodynamic

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m.

a.) Operation condition:

14.000 1/min at free air flow	PWM 100 %;	f: 1 kHz	f: 5 kHz

Max. free-air flow (Δp = 0 / V̇ = max.)	220,0 m3/h	
Max. static pressure (Δp = max. / V̇ =0)	710 Pa	

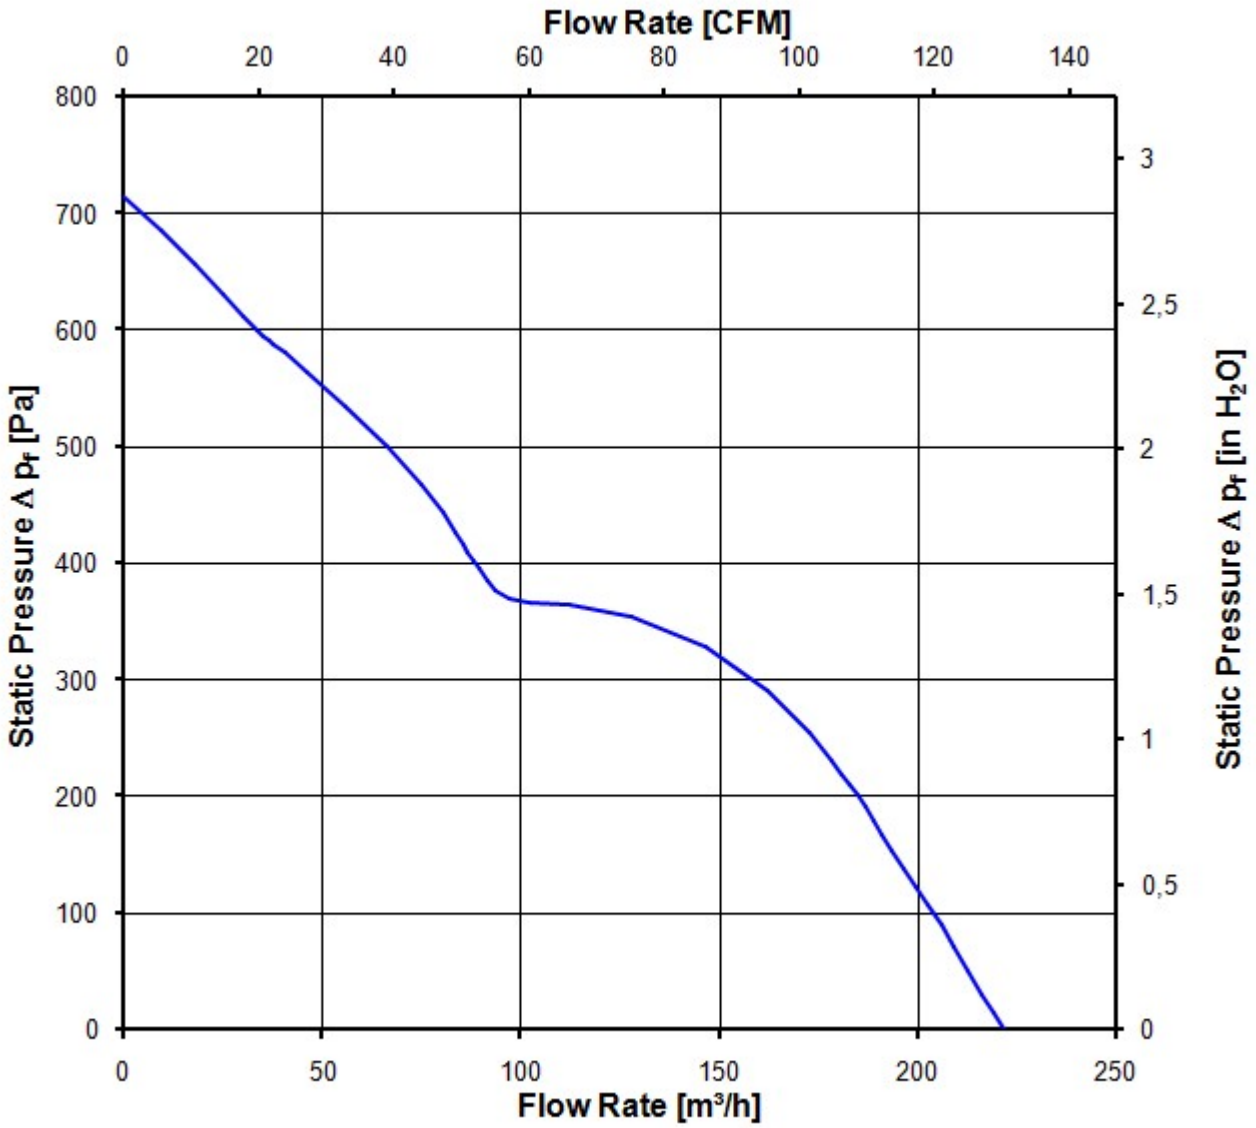

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

14.000 1/min at free air flow	PWM 100 %	PWM min.: ; f: 1 kHz	PWM max.:; f: 5 kHz

Optimal operating point	135,0 m3/h @ 330 Pa	
Sound power level at the optimal operating point	8,0 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	71,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-33 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements*)

Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Radiation exposure	Solar radiation; according to DIN EN 60068-2-5	
Salt fog requirements	salt fog, cyclic, in operation; according to DIN EN 60068-2-52, 3 cycle	
Harmful gas requirements	Mixed gas corrosion test; according to DIN EN 60068-2-60	

*) Permittet application area:
The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.
Pollution degree 3 (according DIN EN 60664-1)
It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.
Short description of the IP-protection type:
Solid particle Protection: Protected against dust.
Protection against deliberate contact: Protected against contact to hazardous parts with a wire.
Protection against water: Protected against splashing water.

The fans were also checked by:

Temporary submersion by IP x7
All IP tests according to DIN EN 60529

Height Storage MIL-STD-810F Method 500.4 Low Pressure Procedure 1
Fungal infestation to MIL-STD 810 F (2000)
Please require severity levels and specification parameters from the responsible development departments

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Air and leakage distances	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests

UL	Yes
VDE	In progress

The approval tests are observed to:
Maximal permitted operating voltage (see section 3.1) and max. permitted ambient temperature TU max.


6 Reliability


6.1 General


Life expectancy L10 at TU = 40 °C	50.000 h	
Life expectancy L10 at TU max.	25.000 h	
Life expectancy L10 Delta (40 °C)	100.000 h	


Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Weitergeben sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten.

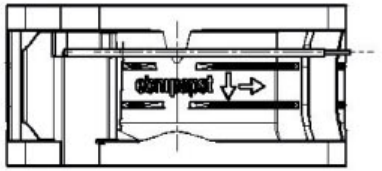

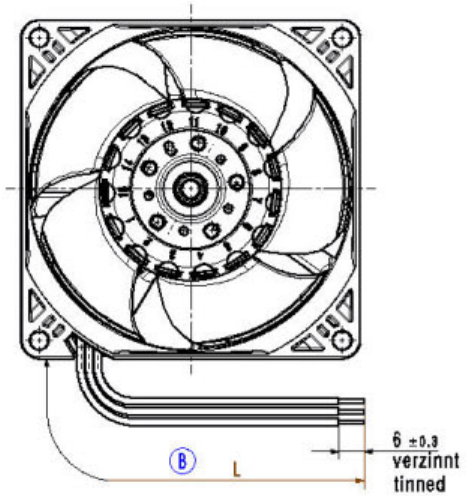

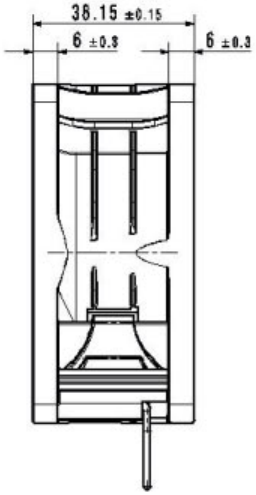

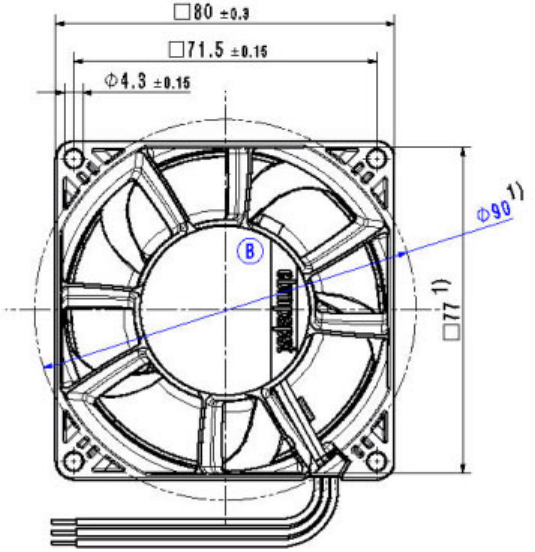

1) Maße für Montagewand
1) dimension for worktop mounting

Laenge und Anzahl der Litzen siehe Produktspezifikation
length and number of the wires, look at the produkt specification

Kein Axialspiel bei Kugellager durch Federausgleich
no axial clearance of ball bearings conditional on a pre-load spring

				Werkstoff / Material:		Volumen / Volume (cm³):	
						Gewicht / Mass (g):	
		88630101 2P4HCE		Artikel / Title:			
		3D-Referenzmodell / 3D-Reference model					
Toleranzen / Tolerances:		Datum	Name				
	Bearb. / Drawn:						
Allgemeintoleranzen / Gen. Tolerances:	Gepr. / Checked:			Zeichn.-Nr. / Drawing No:		Ers.f.Zchg. / Replaces:	
	Freig. / Released:						
	ebmpapst			Dokumentyp / Type of Document:	Teil/Dokument (Blatt/Page):	Index / Index:	Format / Size:	Maßstab/Scale
	ebm-papst St.Georgen GmbH & Co KG							