R3G630-RB32-76

Stulz GmbH

EC centrifugal fan - RadiCal

backward-curved, single-intake



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	**R3G630-RB32-76**
Motor	**M3G150-IF**

Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min^{-1}	1300
Power consumption	W	2800
Current draw	A	4.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	65	56
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		71	62
05 Variable speed drive		Yes	

09 Power consumption P_{ed}	kW	2.67
09 Air flow q_v	m^3/h	11140
09 Pressure increase p_{fs}	Pa	531
10 Speed (rpm) n	min^{-1}	1300
11 Specific ratio*		1.01

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = 1 + p_{fs} / 100 000 Pa

LU-146905

EC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description


Weight	29 kg
Fan size	630 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic (black)
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F4-1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - External 24 V input (parameter setting) - External release input - Alarm relay - Integrated PID controller - Motor current limitation - PFC, passive - RS-485 MODBUS-RTU - Soft start - EEPROM write cycles: 100,000 maximum - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from supply - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Reverse polarity and locked-rotor protection
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	EAC

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward-curved, single-intake


Product drawing

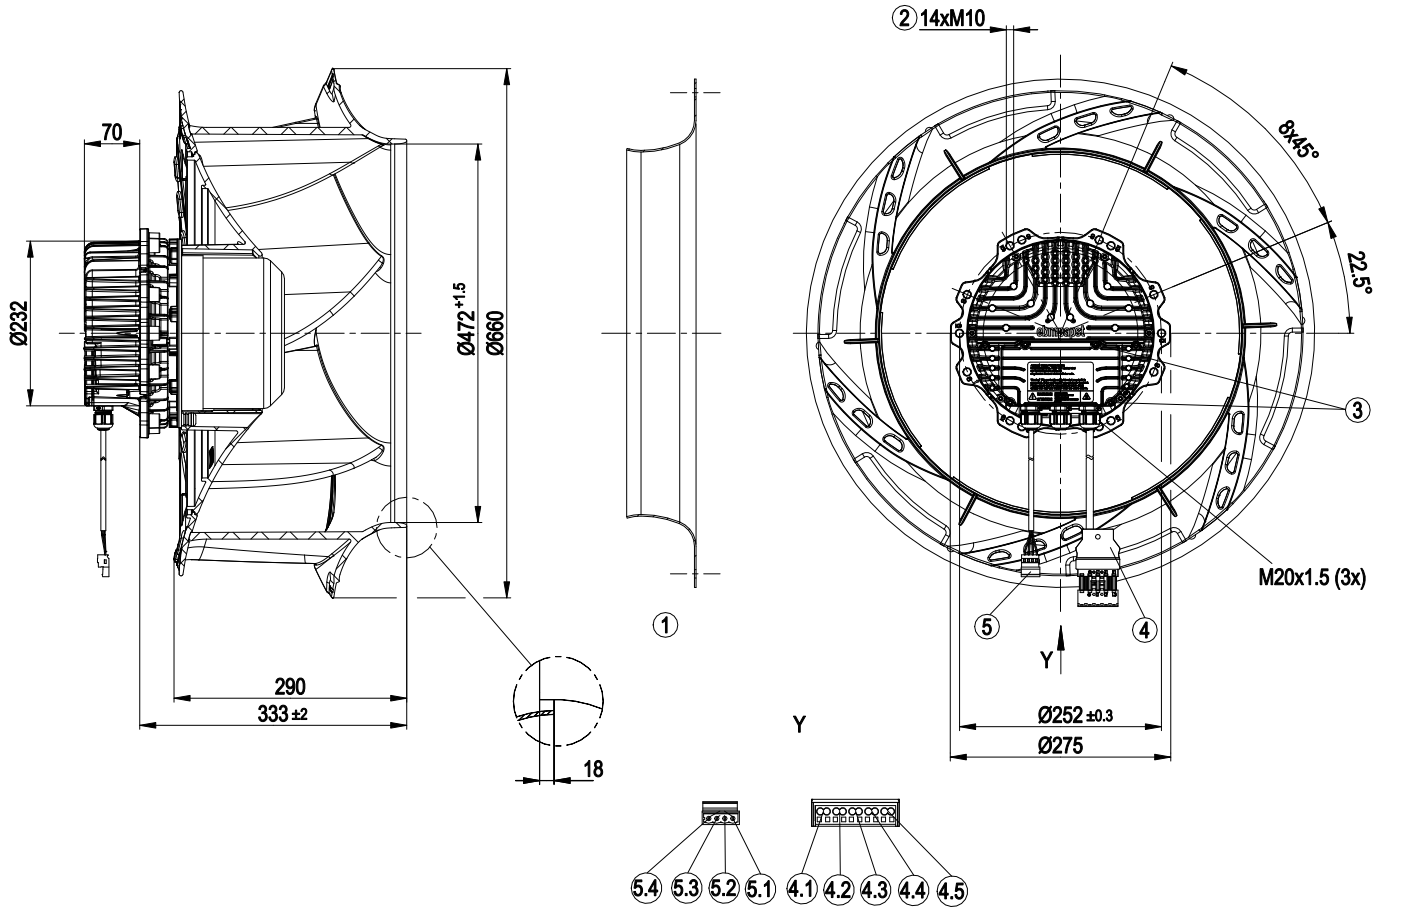

1	Accessory part: inlet ring 63300-2-4013 not included in scope of delivery
2	Max. clearance for screw 25 mm
3	Tightening torque 3.5 ± 0.5 Nm
Y	View Y
4	Plug WAGO no. 0770-001/K011-0174/0000-0300, mating connector (not included in scope of delivery), cable Ölflex Classic 110 gray 4G2.5 with GNYE
4.1	not used
4.2	PE
4.3	L1
4.4	L2
4.5	L3
5	4-pole header, contact spacing 5, WAGO no. 231-604, mating connector (not included in scope of delivery), cable Ölflex Classic 110 gray 4 x 0.75 without GNYE
5.1	GND
5.2	0 - 10 V/PWM
5.3	COM / DIN1
5.4	NC

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

Accessory part

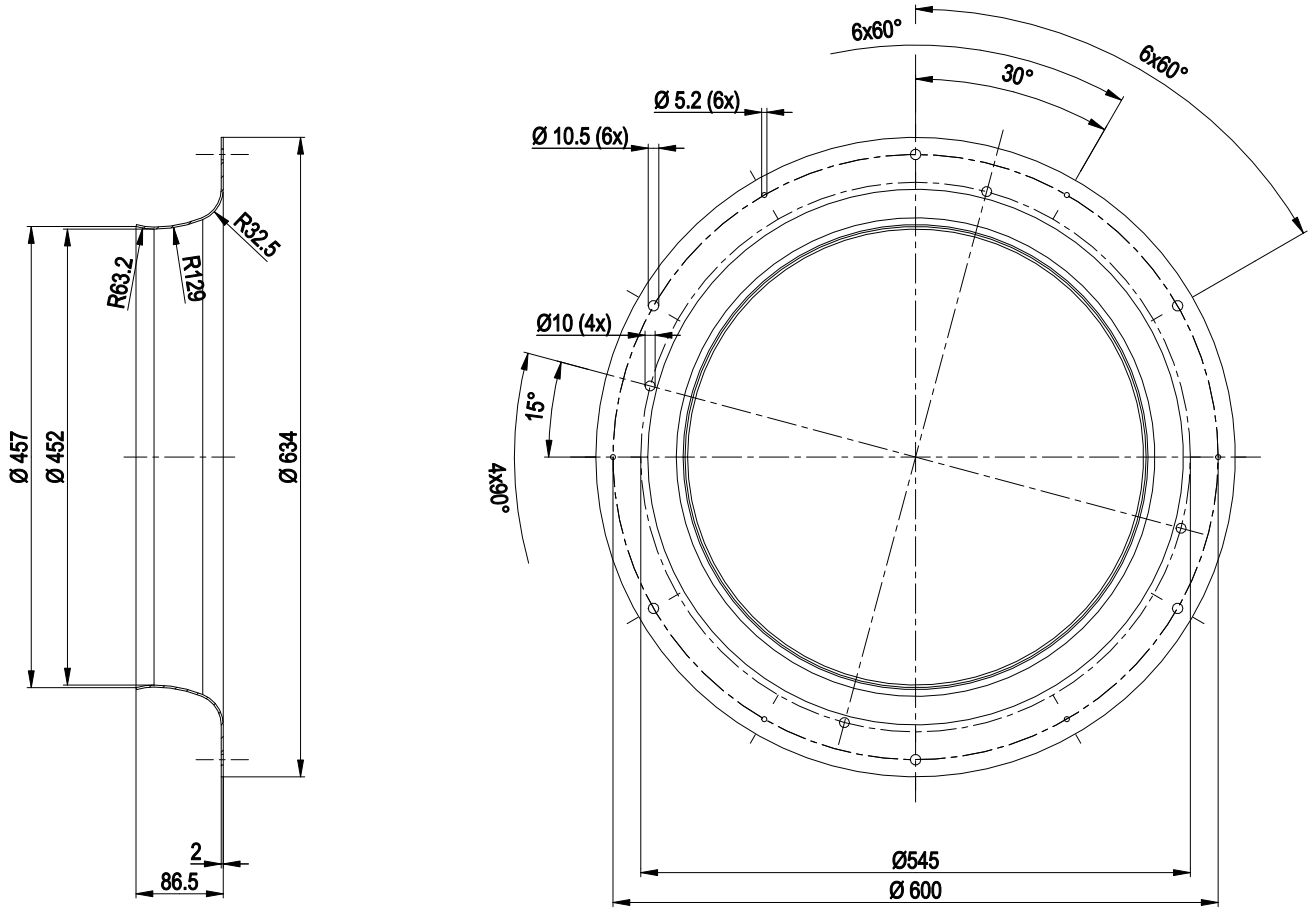


Accessory part: inlet ring 63300-2-4013 not included in scope of delivery

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward-curved, single-intake

Connection diagram

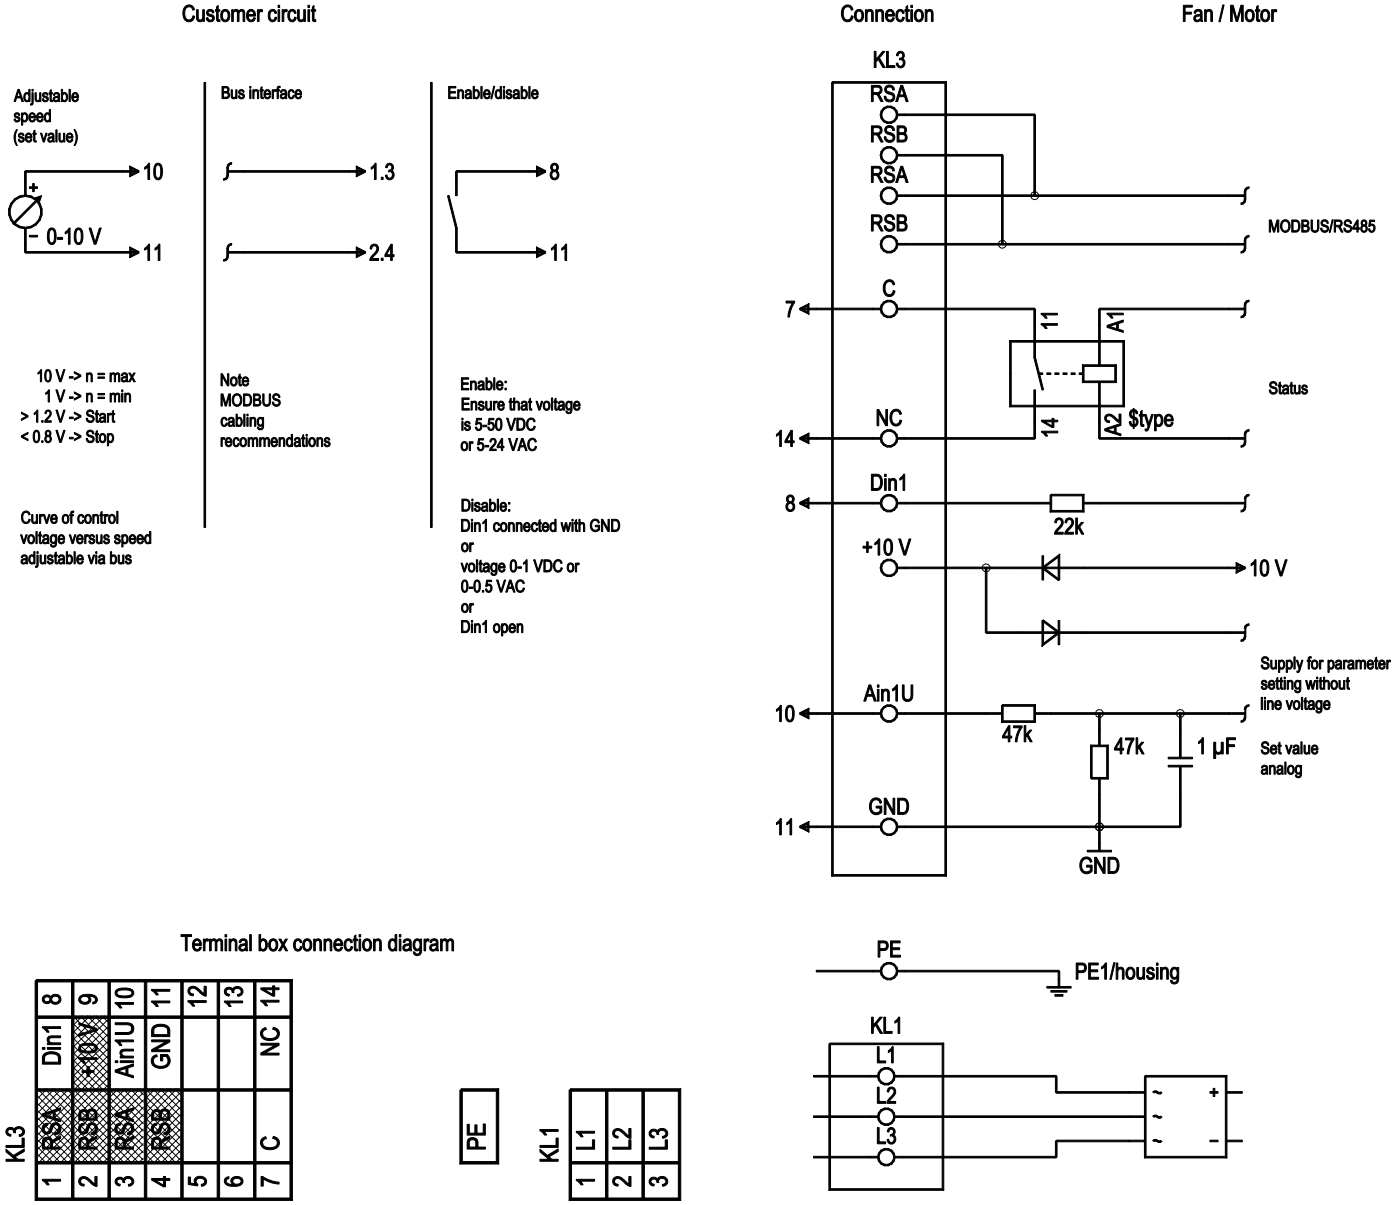

shaded gray => not brought out via leads

No.	Conn.	Designation	Function/assignment
KL1	1, 2, 3	L1, L2, L3	Supply connection, power supply; for nominal voltage range see technical data
PE	PE	PE	Ground connection, PE connection
KL3	7	C	Status relay, floating status contact, break for failure; contact rating 250 VAC / max. 2 A (AC1) / min. 10 mA
KL3	14	NC	Status relay, floating status contact, break for failure; contact rating 250 VAC / max. 2 A (AC1) / min. 10 mA
KL3	1.3	RSA	Bus connection RS485, RSA, MODBUS-RTU; SELV
KL3	2, 4	RSB	Bus connection RS485, RSB, MODBUS-RTU; SELV
KL3	11	GND	Reference ground for control interface; SELV
KL3	10	Ain1 U	Analog input 1, set value: 0-10 V, Ri = 100 kΩ, adjustable curve, only usable as alternative to input Ain1 I; SELV
KL3	9	+10 V	Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); SELV Or: +24 VDC input for parameter setting without line voltage

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

No.	Conn.	Designation	Function/assignment
KL3	8	Din1	Digital input 1: enable electronics; SELV Enable -> 5-50 VDC / 5-24 VAC Disable -> 0-1 VDC / 0-0.5 VAC or bridge to GND or open

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com


R3G630-RB32-76

Stulz GmbH

EC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 50 Hz

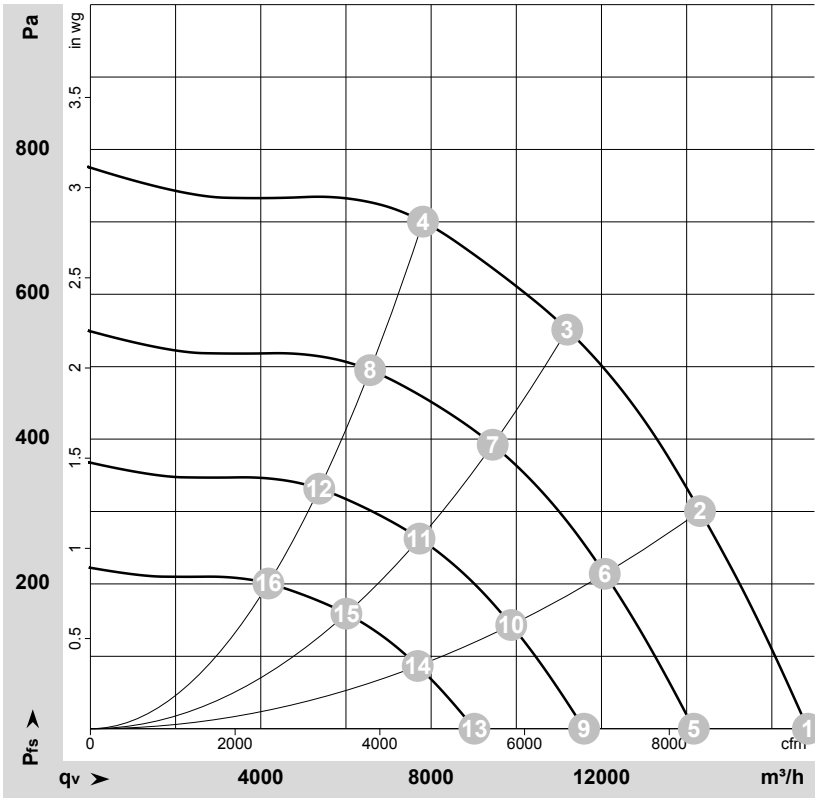

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-164207-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P_{ed}	I	LpA_{in}	LwA_{in}	LwA_{out}	q_V	p_{fs}	q_V	p_{fs}
		V	Hz	min^{-1}	W	A	dB(A)	dB(A)	dB(A)	m^3/h	Pa	cfm	inH2O
1	Y	400	50	1300	1820	2.86	80	88	92	16845	0	9915	0.00
2	Y	400	50	1300	2455	3.79	74	81	87	14315	300	8425	1.20
3	Y	400	50	1300	2800	4.20	70	78	83	11195	550	6590	2.21
4	Y	400	50	1300	2711	4.17	72	79	84	7810	700	4595	2.81
5	Y	400	50	1100	1082	1.70	76	83	88	14170	0	8340	0.00
6	Y	400	50	1100	1478	2.28	70	77	82	12075	216	7110	0.87
7	Y	400	50	1100	1679	2.58	65	73	79	9445	395	5560	1.59
8	Y	400	50	1100	1611	2.48	68	75	80	6565	498	3865	2.00
9	Y	400	50	900	593	0.93	71	78	83	11590	0	6825	0.00
10	Y	400	50	900	809	1.25	65	72	77	9880	145	5815	0.58
11	Y	400	50	900	920	1.41	60	68	74	7730	264	4550	1.06
12	Y	400	50	900	882	1.36	62	70	75	5375	333	3160	1.34
13	Y	400	50	700	279	0.44	64	72	76	9015	0	5305	0.00
14	Y	400	50	700	381	0.59	58	66	71	7685	88	4525	0.35
15	Y	400	50	700	433	0.66	54	62	67	6010	160	3540	0.64
16	Y	400	50	700	415	0.64	56	63	69	4180	201	2460	0.81

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side LwA_{out} = Sound power level outlet side · q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com