W1G350-DD85-10

EC axial fan

sickle-shaped blades (S series)

with round full nozzle

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	**W1G350-DD85-10**	
Motor	**M1G074-CF**	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 57
Method of obtaining data		fa
Speed (rpm)	min^{-1}	1250
Power consumption	W	85
Current draw	A	2.1
Max. back pressure	Pa	65
Max. back pressure	in. wg	0.26
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

EC axial fan

sickle-shaped blades (S series)

with round full nozzle

Technical description

Weight	5.00 kg
Size	350 mm
Motor size	74
Rotor surface	Painted black
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Fan housing material	Sheet steel, galvanized and coated with black plastic (RAL 9005)
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	A
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP24 KM, electronics IP6K9K (mating connector installed)
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H2+
Max. permitted ambient temp. for motor (transport/storage)	+70 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Tach output - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Overvoltage detection - Thermal overload protection for electronics - Reverse polarity protection
Electrical hookup	Connector with cable
With cable	Lateral


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC axial fan

sickle-shaped blades (S series)

with round full nozzle

Product drawing

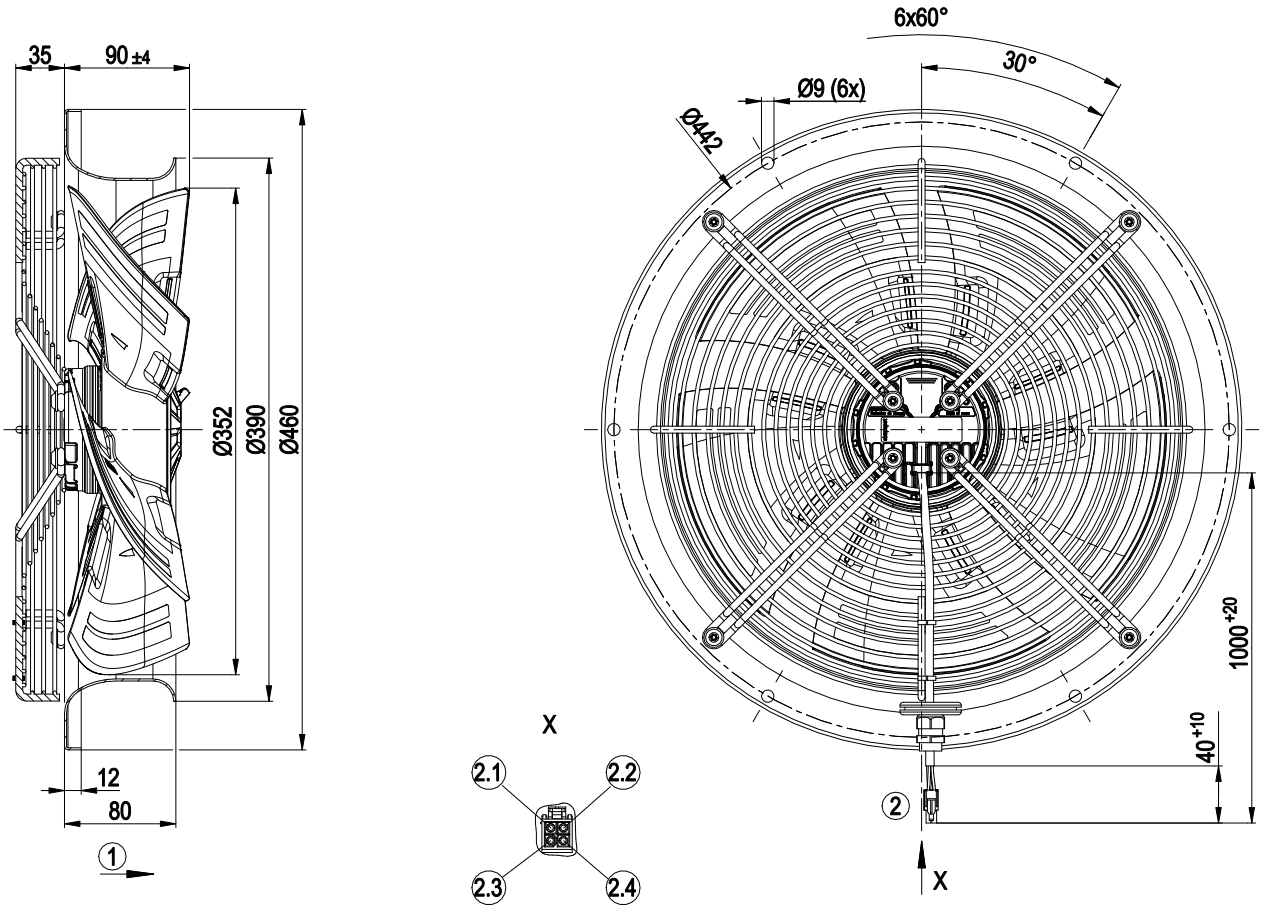

1	Direction of air flow "A"
2	Cable PVC AWG18
	4-pole connector housing TE 172167-1, 4x socket TE 170362-1
2.1	UN +48 VDC
2.2	PWM/LIN
2.3	Tach
2.4	GND


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC axial fan

sickle-shaped blades (S series)

with round full nozzle

Connection diagram

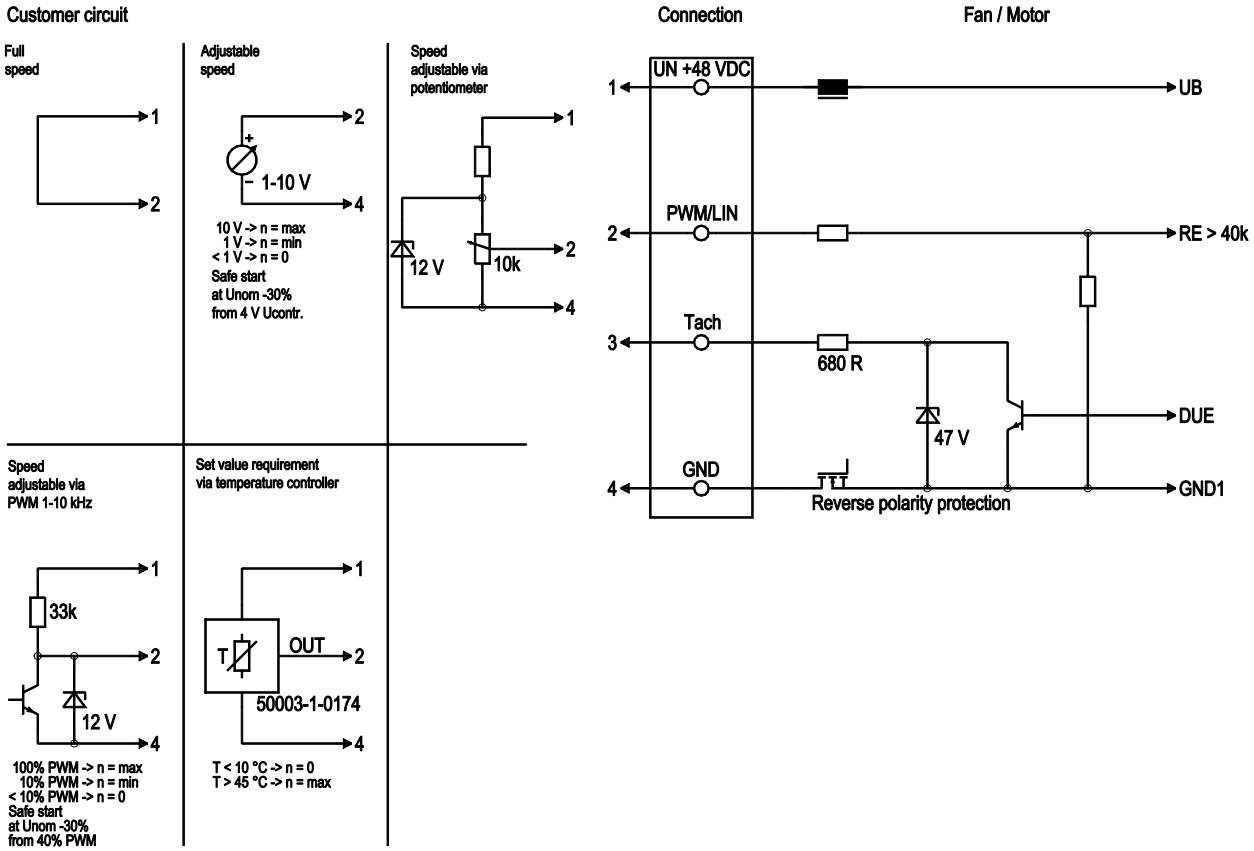

No.	Conn.	Designation	Color	Function/assignment
1	1	UN +48 VDC	red	Power supply 48 VDC, maximum ripple 3.5%
1	2	PWM/LIN	yellow	Control input Re > 100k
1	3	Tach	white	Tach output, 3 pulses per revolution, Isink max = 10 mA
1	4	GND	blue	Reference ground


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC axial fan

sickle-shaped blades (S series)

with round full nozzle

Curves: Air performance

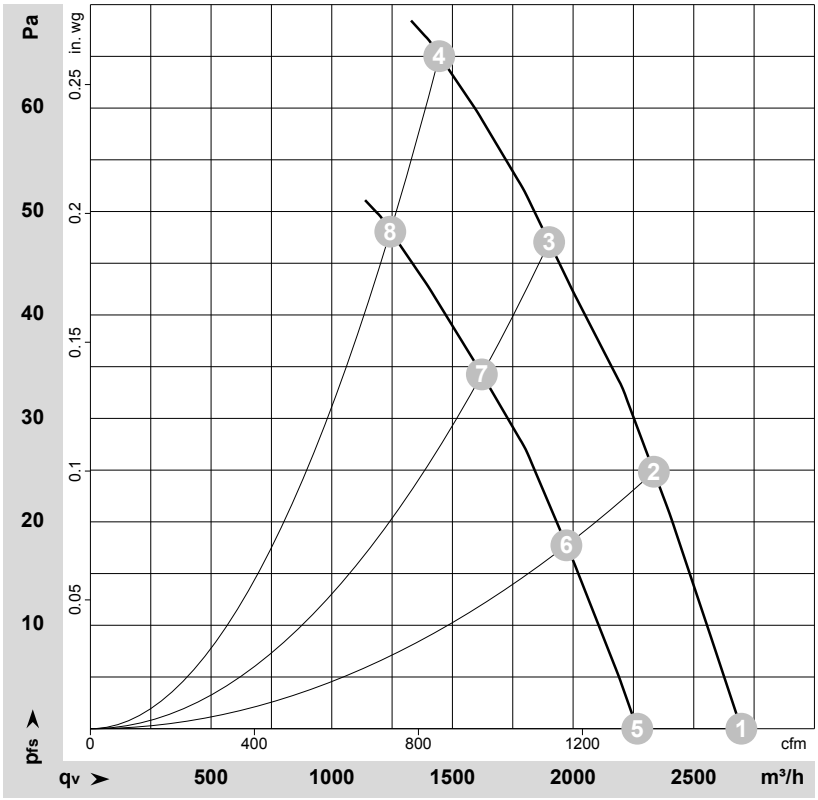

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-188257-1
Measurement: LU-188320-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P_{ed}	I	q_V	p_{fs}	q_V	p_{fs}
	V	min^{-1}	W	A	m^3/h	Pa	cfm	in. wg
1	48-57	1250	85	2.10*	2790	0	1640	0.00
2	48-57	1205	87	2.20*	2340	25	1375	0.10
3	48-57	1175	89	2.20*	1900	47	1120	0.19
4	48-57	1150	90	2.30*	1450	65	855	0.26
5	36	1050	52	1.70	2265	0	1335	0.00
6	36	1025	54	1.80	1970	18	1160	0.07
7	36	1000	56	1.80	1620	34	955	0.14
8	36	990	57	1.90	1245	48	735	0.19

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · * = Current measured at nominal voltage · q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com