

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN ISO 16016 beachten/
Refer to protection notice DIN ISO 16016!

Ansicht A
wiew A
Blasrichtung / blow direction

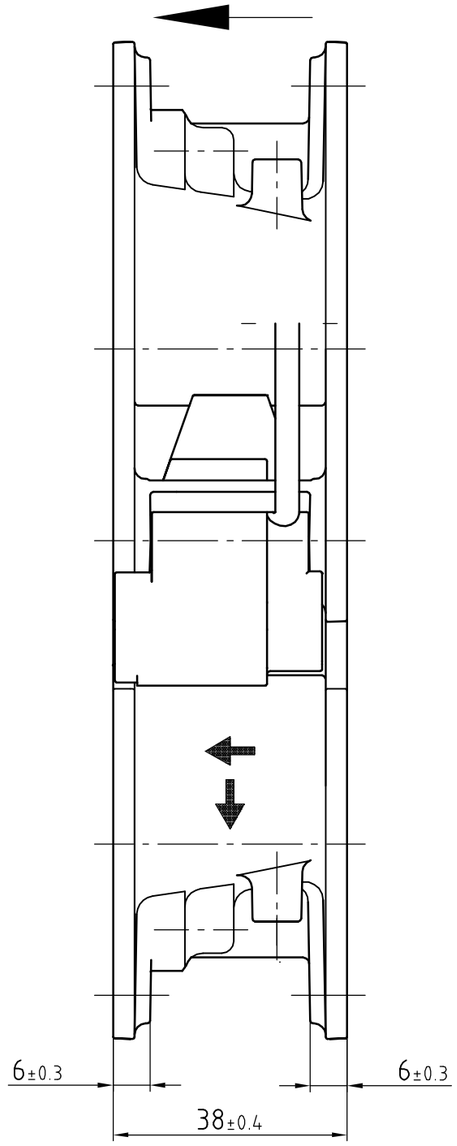

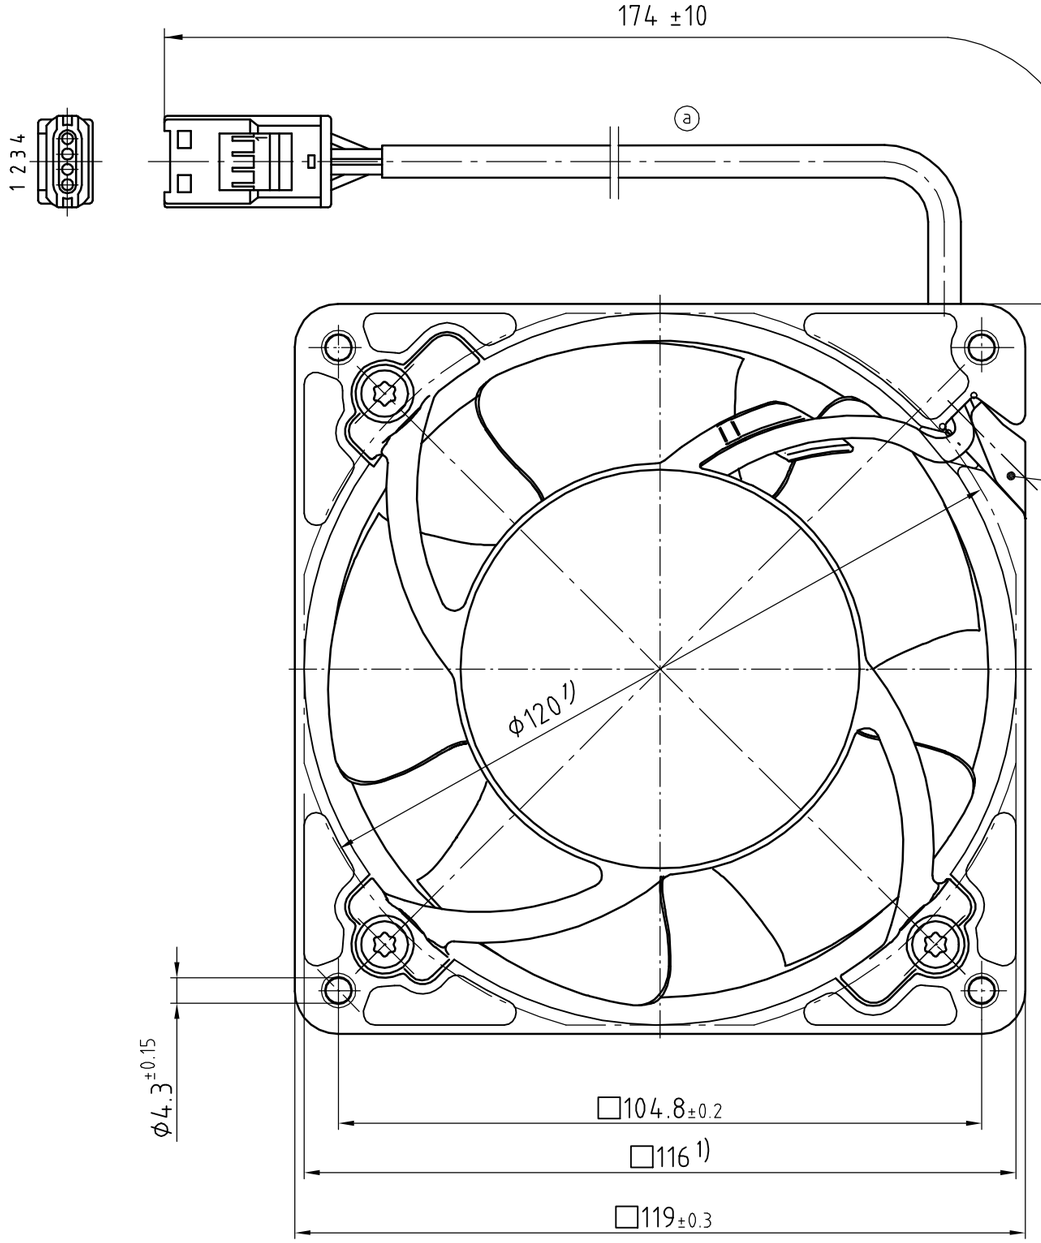

1x Steckergehäuse / 1x plug housing
Molex 52116-0411

4x Kontakt / Contact
Molex 50038-8000

Steckerbelegung / plug connection
PIN 1 = blau / blue (-)
PIN 2= violett / violet (PWM)
PIN 3 = rot / red (+)
PIN 4 = weiss / white (Tacho)

1.) Maß für Montagewand
1.) measure for assemblywall

Axialspiel bei Kugellagerung (K): 0 (mit Federausgleich)
axial clearance with ball bearings (K): 0 (with spring adjustment)

Tolerierung/Tolerances: DIN 7167 Allgemeintoleranzen/ Gen. tolerances: DIN ISO 2768-mK			
AutoCAD 2006			Artikel/ Title: Diagonal-Lüfter
	Datum/Date	Name/Name	Massstab/scale: 1:1
Bearb./Drawn:	14.09.2007	ROJO	
	A	000000112177	Zchg.-Nr./ Dwg.-No.: 9694330210
	Index/Index	Aend.-Nr./Change-No.	Blatt/Page: 002
gepr. u. zur Verwendung freigegeben/Checked for release von/by SEIDLER am/on 14.09.2007	ebm-papst St. Georgen GmbH & Co. KG		Ers.f.Zchg./ Replaces: A3