D3G146-HT13-05

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	**D3G146-HT13-05**
Motor	**M3G055-CF**

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		fa
Speed (rpm)	min^{-1}	1750
Power consumption	W	170
Current draw	A	1.3
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Technical description

Weight	1.8 kg
Size	146 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PP plastic
Housing material	PP plastic
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Locked-rotor detection - Power limiter - Motor current limitation - Soft start - PWM control input - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Connector with cable
Motor protection	Thermal overload protector (TOP) internally connected; Locked-rotor protection
Protection class assignment	0; Built-in component with basic insulation, protection class is based on the intended installation. This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.
Approval	VDE


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Product drawing

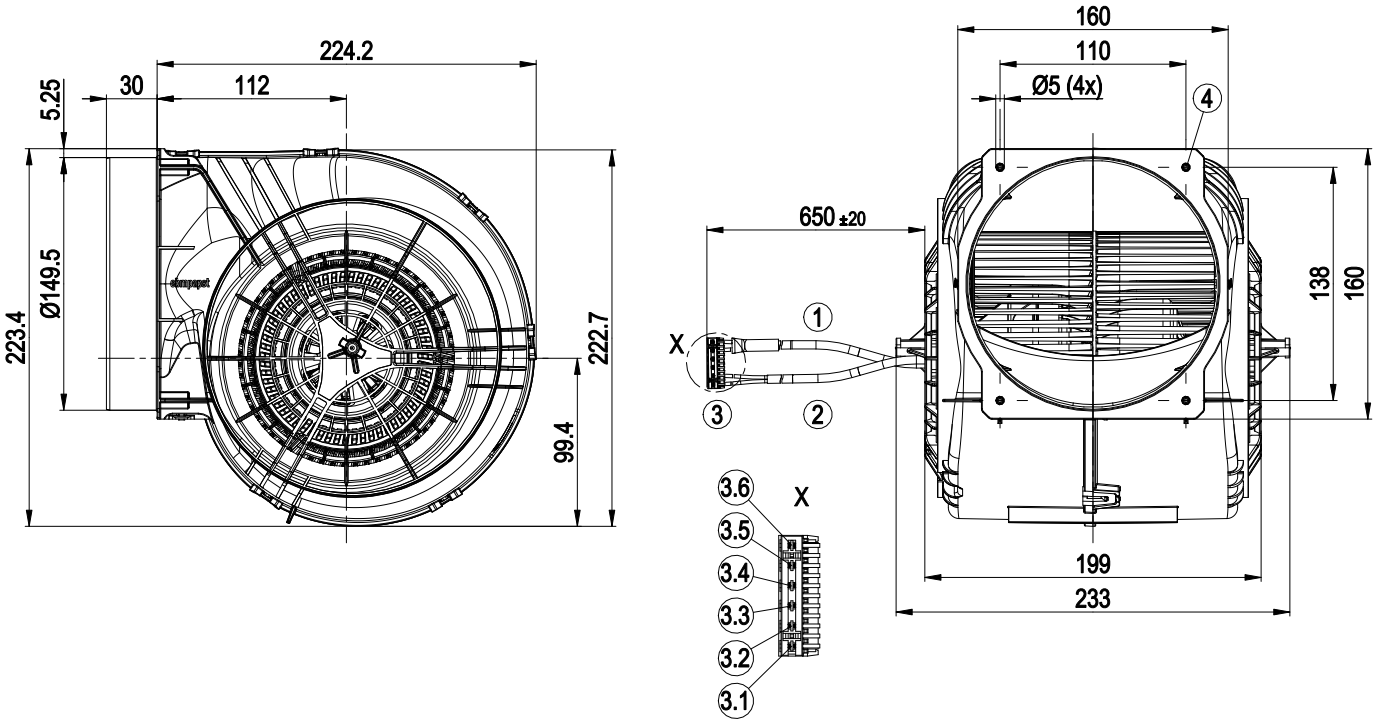

1	Cable PVC 2x 0.5 mm²
2	Cable PVC 2x 0.5 mm²
3	6-pole connector Lumberg 3575 06 K09M09, alternatively HongRu Connectors M7273-6-CD-15-0-S
3.1	L
3.2	N
3.3	not used
3.4	not used
3.5	PWM
3.6	GND
4	Tapping hole prepared for self-tapping screw for fastening plastics (Remform) dia. 5 mm, clearance for screw max. 16 mm.
	Recommended tightening torque 2±0.3 Nm
	A non-return valve (10000-2-4054) can be installed in the outlet. Attaching activated carbon filters to the intakes. Adaptation tailored to activated carbon filter such as type D186 from Resett Engineering Srl.


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Connection diagram

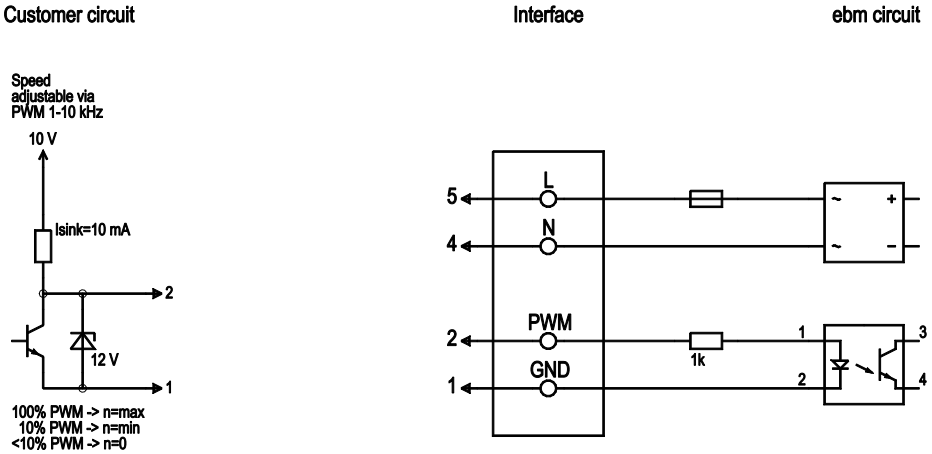

No.	Conn.	Designation	Color	Function/assignment
	1	GND	white	Reference ground for control interface, SELV
	2	PWM	yellow	Control input PWM, impedance 1 kΩ; SELV
	4	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	5	L	brown	Power supply, phase, see nameplate for voltage range


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Curves: Air performance 50 Hz

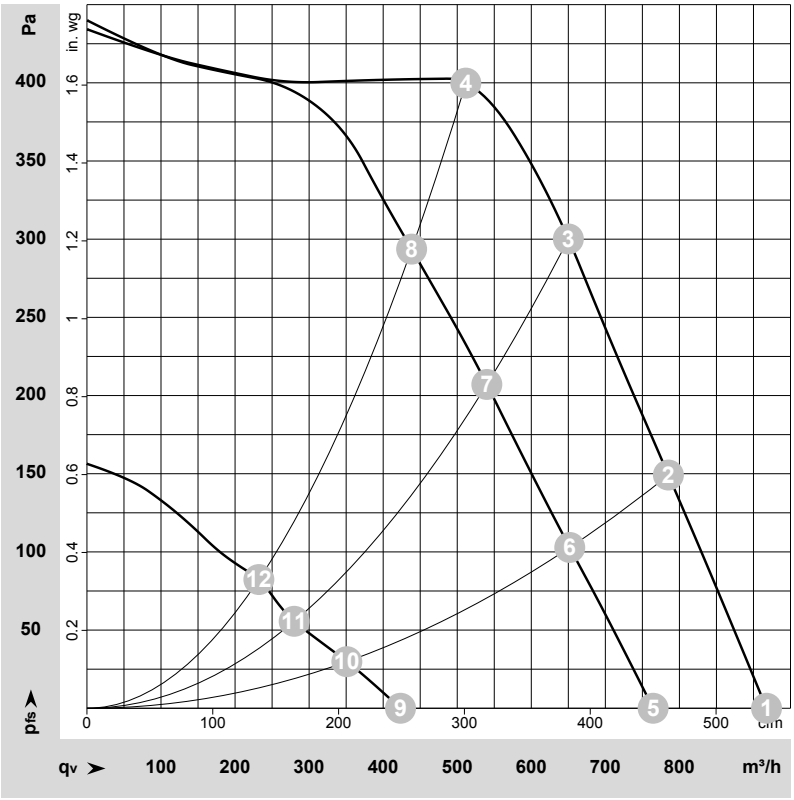

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-222487-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P_{ed}	I	q_V	p_{fs}	q_V	p_{fs}
		V	Hz	min^{-1}	W	A	m^3/h	Pa	cfm	in. wg
1	1~	230	50	1750	170	1.30	920	0	540	0.00
2	1~	230	50	2060	170	1.30	785	150	460	0.60
3	1~	230	50	2410	170	1.30	650	300	385	1.20
4	1~	230	50	2650	154	1.19	510	400	300	1.61
5	1~	230	50	1465	94	0.75	765	0	450	0.00
6	1~	230	50	1720	94	0.75	650	103	385	0.41
7	1~	230	50	2010	94	0.75	540	207	320	0.83
8	1~	230	50	2275	94	0.75	440	294	260	1.18
9	1~	230	50	825	16	0.14	425	0	250	0.00
10	1~	230	50	960	16	0.14	350	30	205	0.12
11	1~	230	50	1070	15	0.13	280	55	165	0.22
12	1~	230	50	1245	16	0.14	230	83	135	0.33

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com