R3G280-RU26-81

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

Type	**R3G280-RU26-81**	
Motor	**M3G084-CF**	
Nominal voltage	VDC	26
Nominal voltage range	VDC	16 .. 32
Type of data definition		fa
Speed (rpm)	min^{-1}	2350
Power input	W	252
Current draw	A	10.5
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	70

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011 (EN 17166)

		Actual	Request 2015
01 Overall efficiency η_{es}	%	66.3	46.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		82.1	62
05 Variable speed drive		Yes	

09 Power input P_e	kW	0.31
09 Air flow q_v	m^3/h	1600
09 Pressure increase p_{fs}	Pa	415
10 Speed (rpm) n	min^{-1}	2265
11 Specific ratio*		1.00

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

* Specific ratio = 1 + p_{fs} / 100 000 Pa

LU-160664

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Technical features

Mass	3 kg
Size	280 mm
Motor size	84
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium, coated in black
Material of impeller	PA UL94 V0 plastic
Direction of rotation	Clockwise, seen on rotor
Type of protection	Motor IP24 KM, electronics IP6K9K (mating connector fitted)
Insulation class	"B"
Humidity (F) / environmental protection class (H)	H3
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensation drainage holes	None
Cooling bore / aperture	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Lowering input - Error output (high-side switch) - INVLIN (control input, inverse linear) - Output limit -Load dump (58 V) - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Temperature derating - Overvoltage detection - Over-temperature protected electronics - Line undervoltage detection - Reverse polarity protection
EMC directives	According to EN 50121-3-2
Electrical connection	Standby current less than 500 µA
Cable exit	Lateral
Protection class	III
Product conforming to standard	EN 45545-2, HL3: 2013; EN 50155: 2008; EN 61373, Cat. 1B: 2010; CE
Approval	EAC


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Product drawing

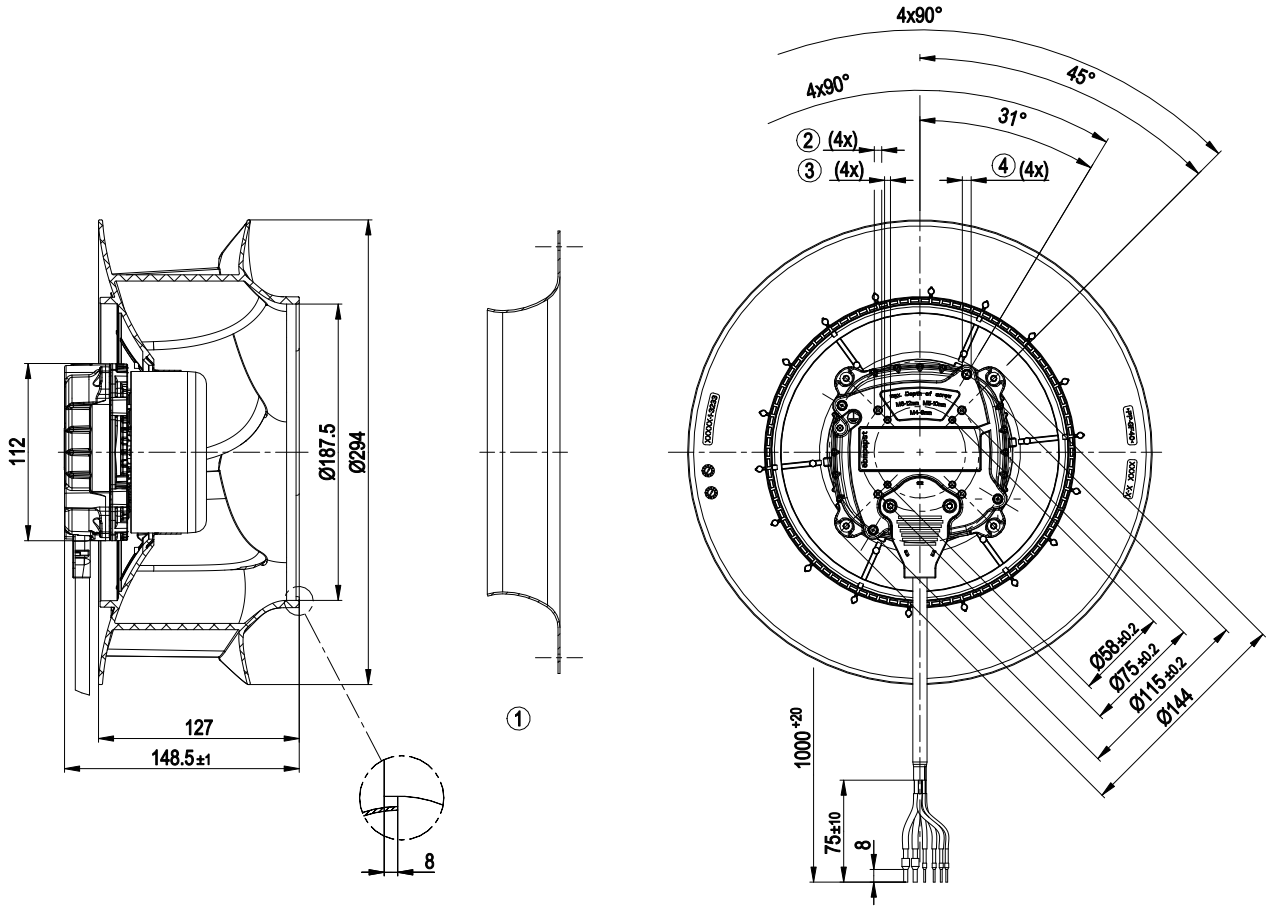

1	Accessory part: inlet nozzle 28000-2-4013 (not included in standard scope of delivery)
2	Depth of screw max. 10 mm, pilot hole prepared for self-tapping M5 screw
3	Depth of screw max. 8 mm, pilot hole prepared for self-tapping M4 screw
4	Depth of screw max. 12 mm, pilot hole prepared for self-tapping M6 screw
5	Connection line (railway) 2x 2.5 mm², 4x 1.0 mm², 6x crimped core-end sleeves


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Accessory part

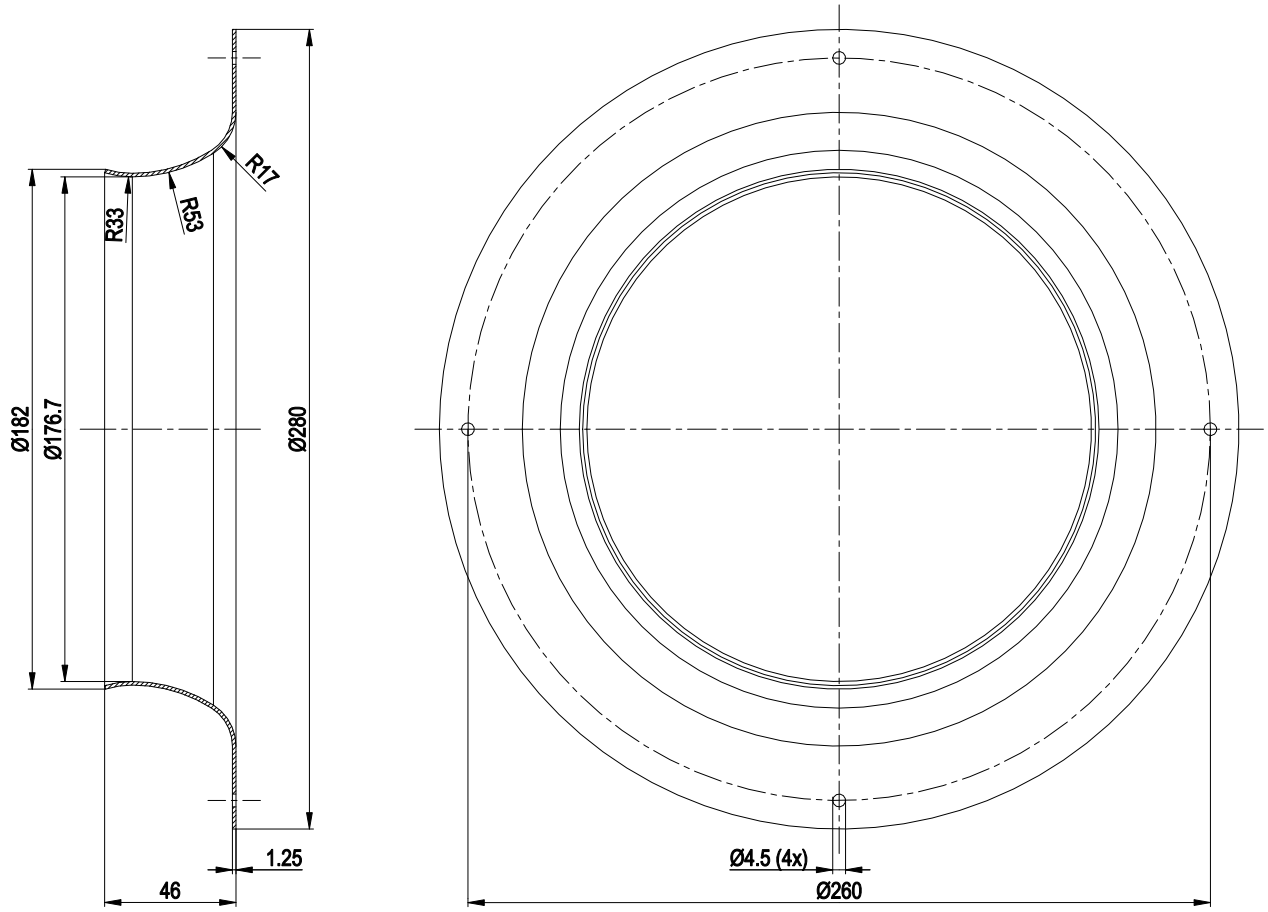

Accessory part: Inlet nozzle 28000-2-4013 not included in scope of delivery


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Connection screen

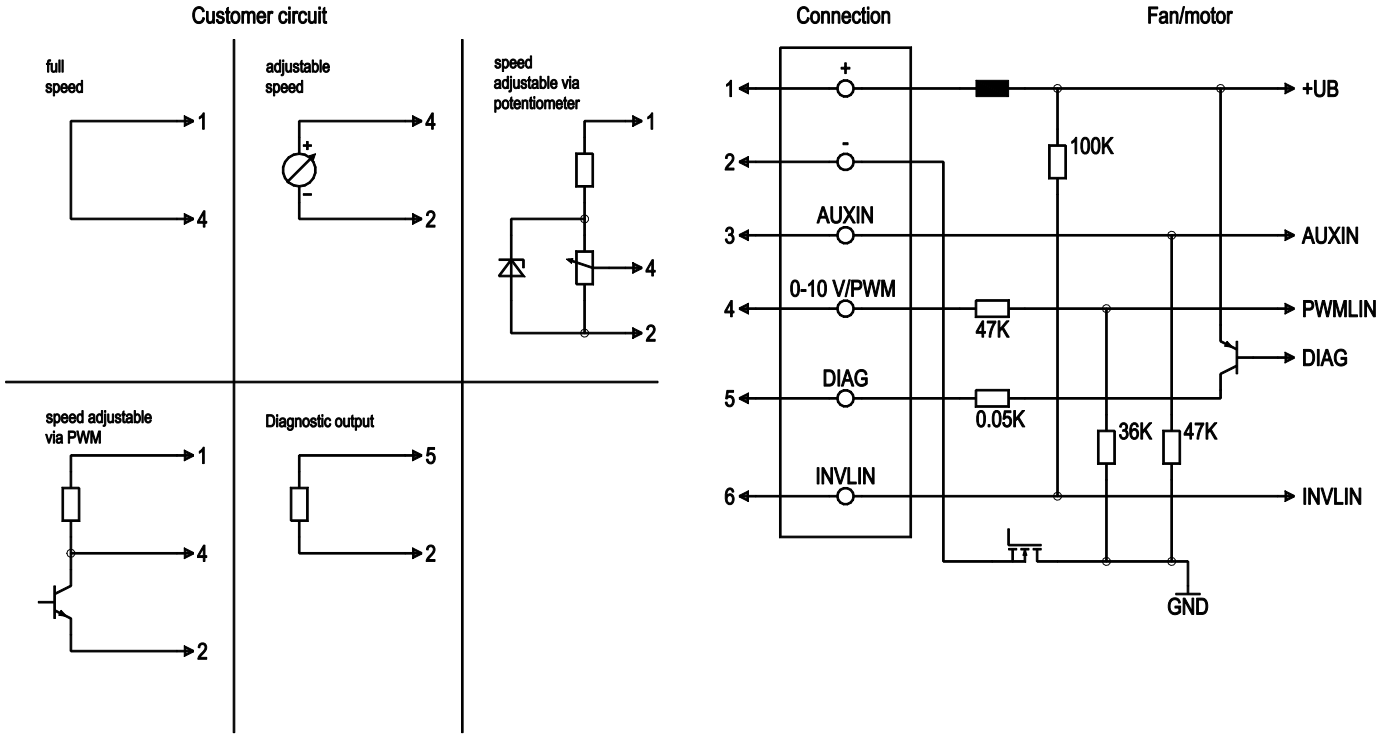

No.	Conn.	Designation	Colour	Function / assignment
	1	+	black	Power supply, see type plate for voltage range
	2	-	brown	Power supply, see type plate for voltage range
	3	AUXIN	blue	Digital input: when active (> 4 V), value of PWM signal is halved
	4	0-10 V / PWM	yellow	Control input: Ri > 47 kΩ 0-10 V (typ. < 1 V -> n=0; 1.5 V -> n=min; >10 V -> n=max) PWM (amplitude 10 V; 1-50 kHz; typ. < 5 % -> n=0; 15% -> n=min; > 100% -> n=max)
	5	DIAG	white	Diagnostic output: open collector, Isource max = 20 mA, Fan OK -> low; fan error -> high
	6	INVLIN	orange	Control input, inverse linear


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Charts: Air flow

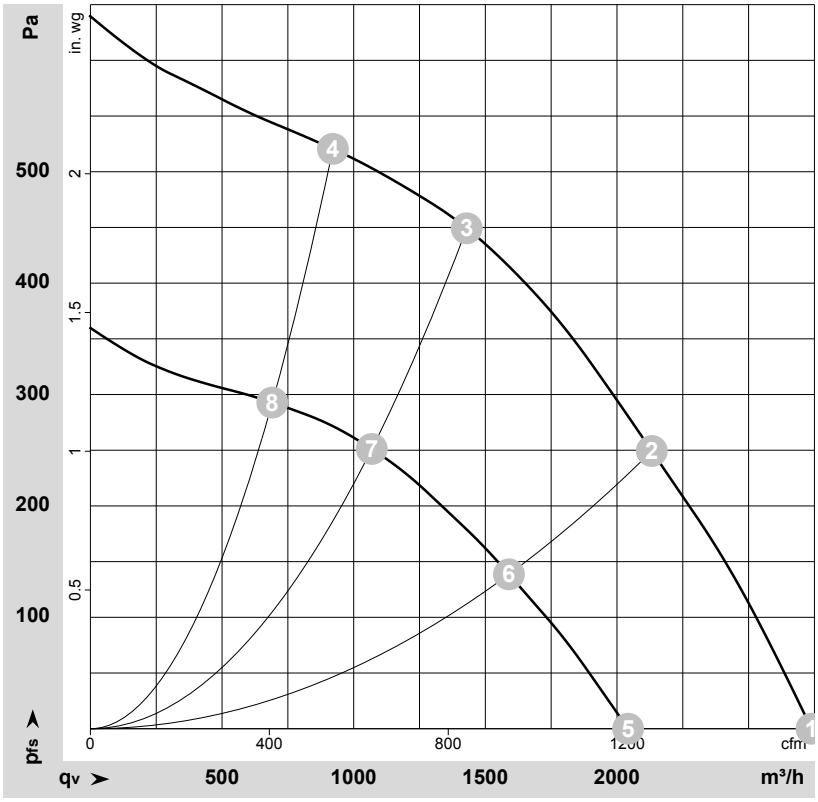

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-160664-1
Measurement: LU-160865-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	n	P_{ed}	I	LpA_{in}	LwA_{in}	q_V	p_{fs}	q_V	p_{fs}
	V	min^{-1}	W	A	dB(A)	dB(A)	m^3/h	Pa	cfm	in. wg
1	24-32	2350	252	10.50*	72	80	2740	0	1610	0.00
2	24-32	2280	298	12.40*	69	75	2130	250	1255	1.00
3	24-32	2265	304	12.60*	67	73	1430	450	840	1.81
4	24-32	2305	280	11.70*	68	74	920	520	540	2.09
5	16	1745	107	6.70			2040	0	1200	0.00
6	16	1715	124	7.77			1590	139	935	0.56
7	16	1700	133	8.33			1070	251	630	1.01
8	16	1730	119	7.48			690	293	405	1.18

U = Supply voltage · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · * = Current measured at rated voltage · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com