
MAER	Product model	YZF45L20P4-7
	product type	Shaded pole motor
	customer code	/
	Product number	/
	certification	CE,CCC

Rotation direction of motor

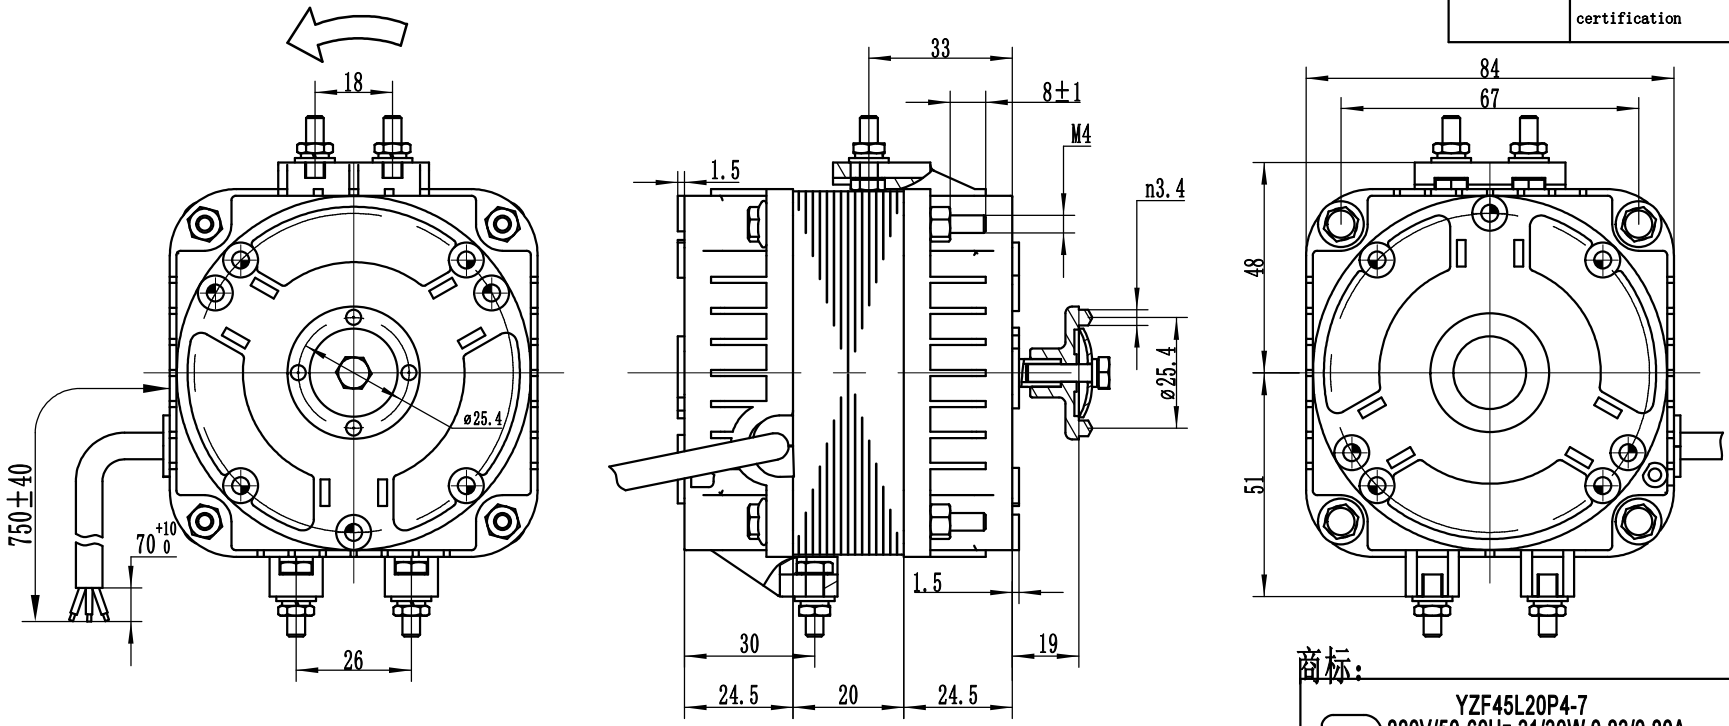

商标：

YZF45L20P4-7
220V/50-60Hz 31/30W 0.23/0.20A
1300/1550r/min CL.B IP42 2022/12 CE

Technical requirement

1. motor components should be assembled with no oil or dirt on the surface, no apparent distortion, mechanical damage and other defects.
2. motor rotation is flexible, no card stagnation, running sound, fixed rotor without edge and other bad phenomena.
3. fan safety requirements according to GB12350-2009, electrical strength of 1500. Min; the insulation level resistance at room temperature is not less than 100MΩ.
4. The size of outgoing wire is 0.5mm², and the color of three-core wire is brown, blue and yellow green ground wire.（引出线规格0.5mm²，三芯线颜色为棕、蓝、黄绿地线）
5. The movement clearance of the motor is 1-1.5mm.（电机窜动间隙1-1.5mm）
6. The shipping mark shall be affixed to the upper left corner of the packing box.（唛头贴在包装箱左上角）
7. Tighten the bracket nut.（支架螺母打紧）
8. insulation grade of motor: CLASS B. level of motor protection IP42.
9. environment temperature: -25 ℃ ~50 ℃.
10. The line is 0.75 m long.（线长0.75米）

Mark:

MAER MOTORS & FANS SHADED POLE MOTOR
MODEL:YZF45L20P4-7
VOLTAGE:220V/50/60Hz
N.W/G.W. / KG
MEAS:44.5X34.5X24 CM
Quantity:24
CL.B
CE
xxxxxxx

Main motor parameters:

Motor model	UAC (V) ±5%	f (Hz)	P2 (W)	P1 (W)	I (A)	n (r/min)
YZF45L20P4-7	220	50/60	7	31/30	0.23/0.20	1300/1550

版本/Ver.		Page	1		浙江马尔风机有限公司 ZHEJIANG MAER FAN MOTOR CO.,LTD.
重量/WG.	Kg	签名/Name		日期/Date	产品规格书 Product Specification
绘图/Drawing					
审核/Checked					
批准/Approved					型号/Model YZF45L20P4-7
客户确认/Customer confirmation					品号 P/N