**S3G450-LL03-Q6**

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

**ebm-papst Mulfingen GmbH & Co. KG**
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

| | |
|---|---|
| **Type** | **S3G450-LL03-Q6** |
| **Motor** | **M3G084-FA** |

| | | |
|---|---|---|
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Nominal voltage range | VAC | 200 .. 277 |
| Frequency | Hz | 50/60 |
| Method of obtaining data | | ml |
| Speed (rpm) | $min^{-1}$ | 1500 |
| Power consumption | W | 500 |
| Current draw | A | 2.2 |
| Max. back pressure | Pa | 150 |
| Max. back pressure | in. wg | 0.6 |
| Min. ambient temperature | °C | -40 |
| Max. ambient temperature | °C | 40 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

## Data according to Commission Regulation (EU) 327/2011

| | | Actual | Req. 2015 |
|---|---|---|---|
| 01 Overall efficiency $\eta_{es}$ | % | 42.8 | 31.8 |
| 02 Measurement category | | A | |
| 03 Efficiency category | | Static | |
| 04 Efficiency grade N | | 51 | 40 |
| 05 Variable speed drive | | Yes | |

| | | |
|---|---|---|
| 09 Power consumption $P_{ed}$ | kW | 0.5 |
| 09 Air flow $q_v$ | $m^3/h$ | 5005 |
| 09 Pressure increase $p_{fs}$ | Pa | 140 |
| 10 Speed (rpm) n | $min^{-1}$ | 1500 |
| 11 Specific ratio* | | 1.00 |

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = 1 + $p_{fs}$ / 100 000 Pa

LU-155850

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

## Technical description

| | |
|---|---|
| **Weight** | 7.2 kg |
| **Size** | 450 mm |
| **Motor size** | 84 |
| **Rotor surface** | Painted black |
| **Terminal box material** | PP plastic |
| **Electronics housing material** | Die-cast aluminum, painted black |
| **Blade material** | Press-fitted, painted sheet steel blank, sprayed with PP plastic |
| **Guard grille material** | Stainless steel |
| **Number of blades** | 5 |
| **Airflow direction** | A |
| **Direction of rotation** | Clockwise, viewed toward rotor |
| **Degree of protection** | IP55 |
| **Insulation class** | "F" |
| **Moisture (F) / Environmental (H) protection class** | H2+ |
| **Max. permitted ambient temp. for motor (transport/storage)** | +70 °C |
| **Min. permitted ambient temp. for motor (transport/storage)** | -40 °C |
| **Installation position** | Shaft horizontal or rotor on top |
| **Condensation drainage holes** | None |
| **Mode** | S1 |
| **Motor bearing** | Ball bearing with low-temperature lubricant; (sealed) |
| **Technical features** | - Output 10 VDC, max. 10 mA<br>- Operation and alarm display<br>- Tach output<br>- Alarm relay<br>- Integrated PID controller<br>- Power limiter<br>- Motor current limitation<br>- PFC, active<br>- RS-485 MODBUS-RTU<br>- Soft start<br>- Control input 0-10 VDC / PWM<br>- Control interface with SELV potential safely disconnected from the mains<br>- Thermal overload protection for electronics/motor<br>- Line undervoltage / phase failure detection |
| **Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)** | <= 3.5 mA |
| **Electrical hookup** | Terminal box |
| **Motor protection** | Thermal overload protector (TOP) internally connected |
| **Protection class** | I (with customer connection of protective earth) |
| **Conformity with standards** | EN 61800-5-1; CE |
| **Approval** | CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1 |
| **Comment** | Conformity with EN 60335-1 in preparation |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

## Product drawing

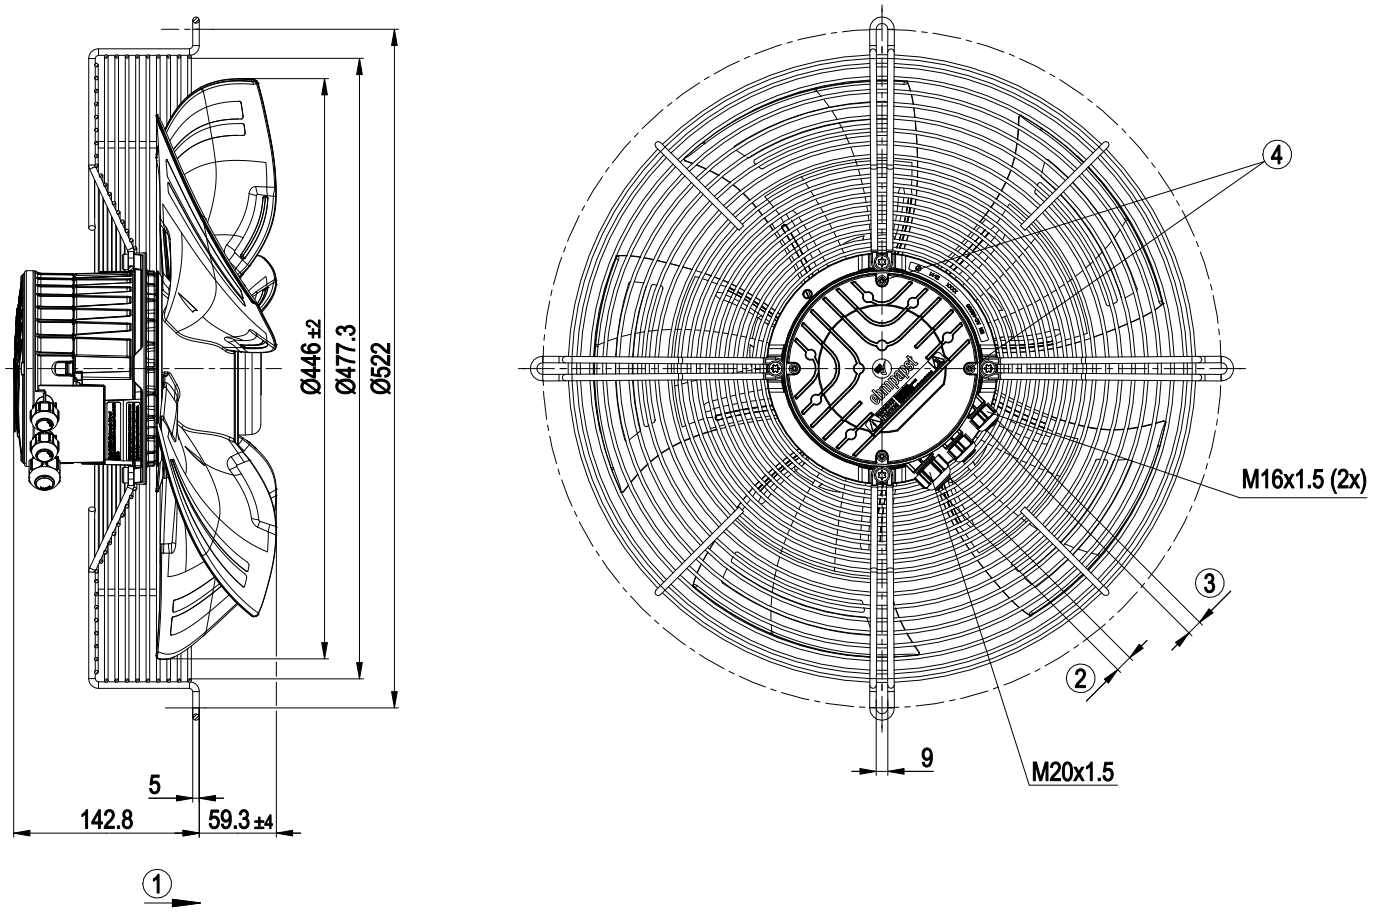


| | |
|---|---|
| 1 | Direction of air flow "A" |
| 2 | Cable diameter min. 8 mm, max. 12 mm, tightening torque 1.8±0.3 Nm (use must be made of seal provided)<br>Cable diameter min. 4 mm, max. 10 mm, tightening torque 1.8±0.3 Nm |
| 3 | Cable diameter min. 6 mm, max. 10 mm, tightening torque 1.8±0.3 Nm (use must be made of seal provided)<br>Cable diameter min. 4 mm, max. 7 mm, tightening torque 1.8±0.3 Nm |
| 4 | Tightening torque 1.5 ± 0.2 Nm |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

## Connection diagram

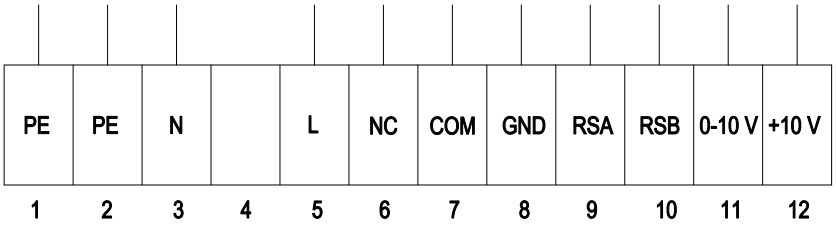


| No. | Conn. | Designation | Function/assignment |
|---|---|---|---|
| | 1 | PE | Protective earth |
| | 2 | PE | Protective earth |
| | 3 | N | Power supply, neutral conductor |
| | 4 | - | not used |
| | 5 | L | Power supply, phase |
| | 6 | NC | Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; basic insulation on supply side and reinforced insulation on control interface side |
| | 7 | COM | Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; basic insulation on supply side and reinforced insulation on control interface side |
| | 8 | GND | Reference ground for control interface, SELV |
| | 9 | RSA | RS485 interface for MODBUS, RSA; SELV |
| | 10 | RSB | RS485 interface for MODBUS, RSB; SELV |
| | 11 | 0-10 V | Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve |
| | 12 | +10 V | Fixed voltage output 10 VDC, SELV, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot) |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

## Curves: Air performance 50 Hz

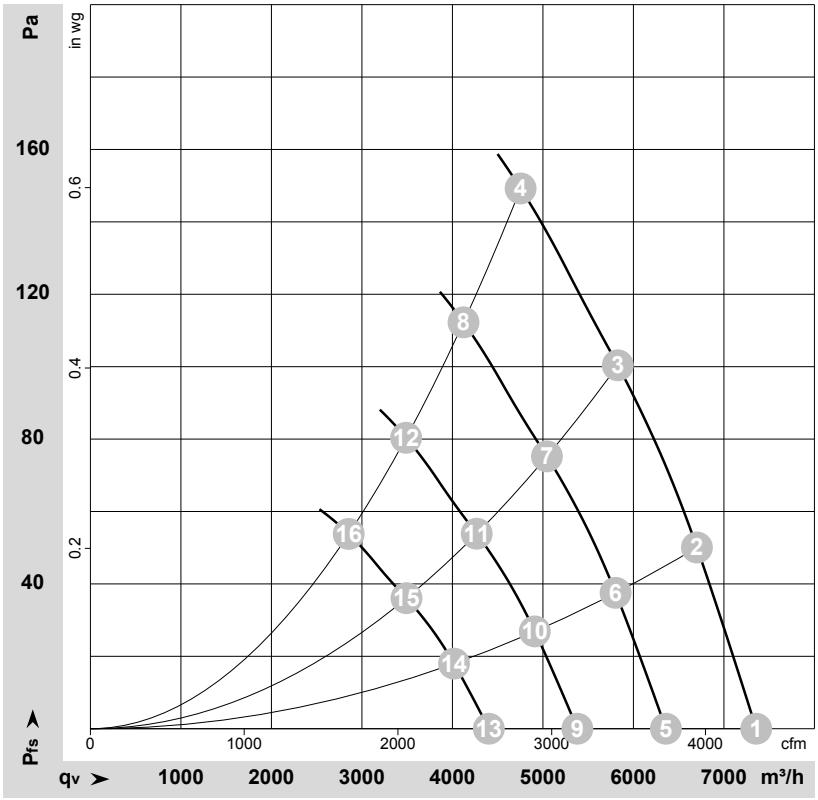


ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-155850-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

| | U | f | n | $P_{ed}$ | I | $LpA_{in}$ | $LwA_{in}$ | $q_V$ | $p_{fs}$ | $q_V$ | $p_{fs}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | V | Hz | $min^{-1}$ | W | A | dB(A) | dB(A) | $m^3/h$ | Pa | cfm | in. wg |
| 1 | 230 | 50 | 1500 | 396 | 1.73 | 66 | 74 | 7355 | 0 | 4330 | 0.00 |
| 2 | 230 | 50 | 1500 | 438 | 1.91 | 65 | 73 | 6700 | 50 | 3945 | 0.20 |
| 3 | 230 | 50 | 1500 | 479 | 2.09 | 63 | 71 | 5825 | 100 | 3430 | 0.40 |
| 4 | 230 | 50 | 1500 | 500 | 2.20 | 64 | 72 | 4755 | 150 | 2800 | 0.60 |
| 5 | 230 | 50 | 1300 | 255 | 1.12 | | | 6360 | 0 | 3745 | 0.00 |
| 6 | 230 | 50 | 1300 | 284 | 1.24 | | | 5805 | 38 | 3415 | 0.15 |
| 7 | 230 | 50 | 1300 | 310 | 1.35 | | | 5045 | 75 | 2970 | 0.30 |
| 8 | 230 | 50 | 1300 | 333 | 1.45 | | | 4125 | 112 | 2425 | 0.45 |
| 9 | 230 | 50 | 1100 | 155 | 0.68 | | | 5380 | 0 | 3165 | 0.00 |
| 10 | 230 | 50 | 1100 | 172 | 0.75 | | | 4910 | 27 | 2890 | 0.11 |
| 11 | 230 | 50 | 1100 | 188 | 0.82 | | | 4270 | 54 | 2510 | 0.22 |
| 12 | 230 | 50 | 1100 | 202 | 0.88 | | | 3490 | 80 | 2055 | 0.32 |
| 13 | 230 | 50 | 900 | 85 | 0.37 | | | 4400 | 0 | 2590 | 0.00 |
| 14 | 230 | 50 | 900 | 94 | 0.41 | | | 4015 | 18 | 2365 | 0.07 |
| 15 | 230 | 50 | 900 | 103 | 0.45 | | | 3490 | 36 | 2055 | 0.14 |
| 16 | 230 | 50 | 900 | 110 | 0.48 | | | 2855 | 54 | 1680 | 0.22 |

U = Voltage · f = Frequency · n = Speed (rpm) · $P_{ed}$ = Power consumption · I = Current draw · $LpA_{in}$ = Sound pressure level intake side · $LwA_{in}$ = Sound power level intake side
$q_V$ = Air flow · $p_{fs}$ = Pressure increase



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com