
MAER		
	Product model	YZF45L40P4-25
	product type	Shaded pole motor
	customer code	/
	Product number	/
	certification	CE,CCC

Rotation direction of motor

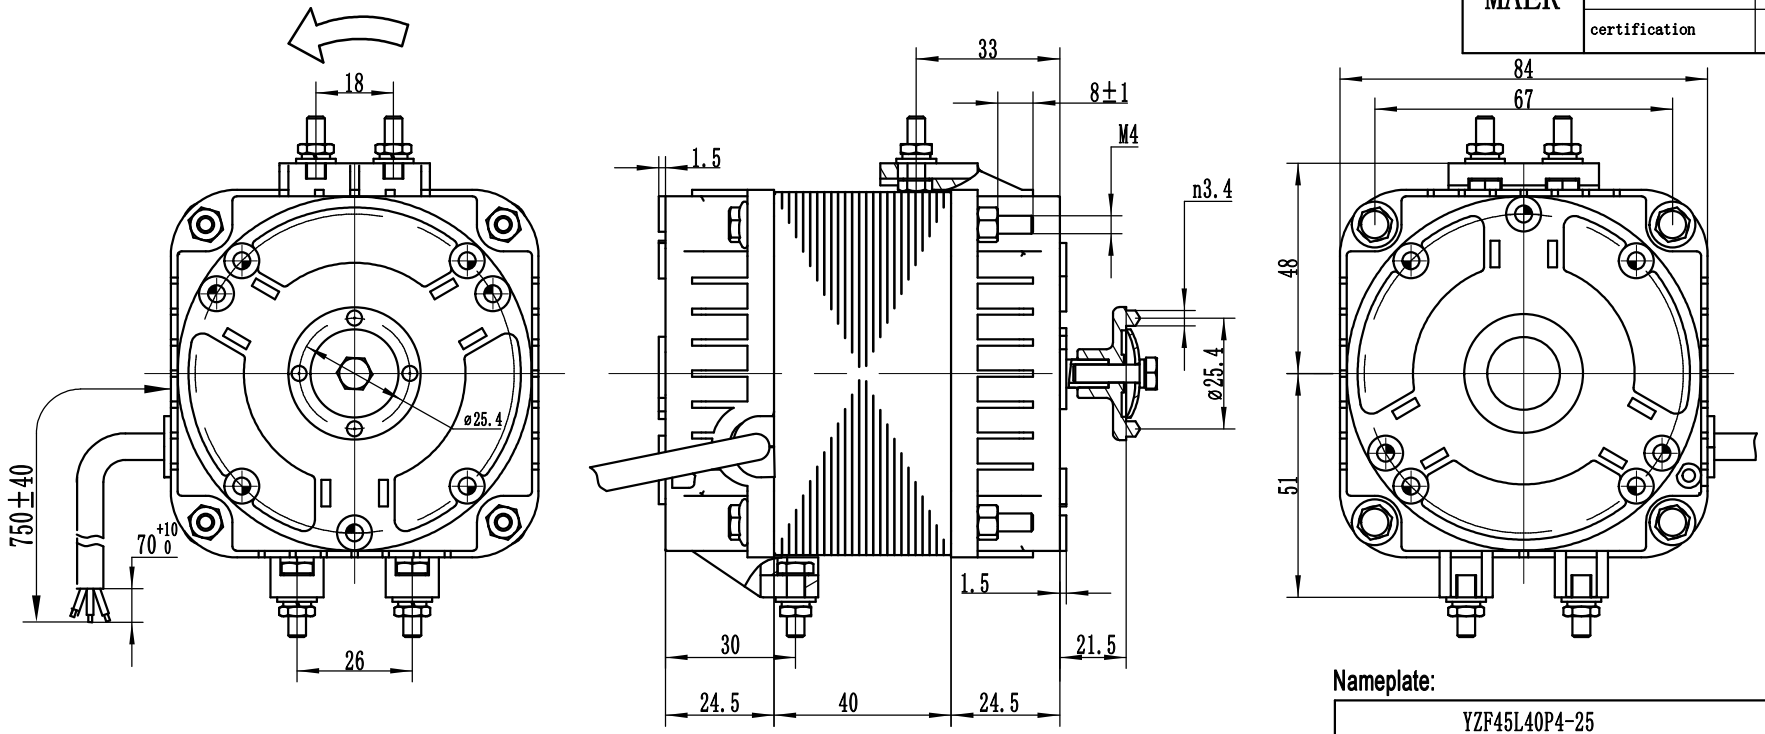

1. motor components should be assembled with no oil or dirt on the surface, no apparent distortion, mechanical damage and other defects.
2. motor rotation is flexible, no card stagnation, running sound, fixed rotor without edge and other bad phenomena.
3. fan safety requirements according to GB12350-2009, electrical strength of 1500. Min; the insulation level resistance at room temperature is not less than 100MΩ.
4. The size of outgoing wire is 0.5mm², and the color of three-core wire is brown, blue and yellow green ground wire.（引出线规格0.5mm²，三芯线颜色为棕、蓝、黄绿地线）
5. The movement clearance of the motor is 1-1.5mm.（电机窜动间隙1-1.5mm）
6. The shipping mark shall be affixed to the upper left corner of the packing box.（唛头贴在包装箱左上角）
7. Tighten the bracket nut.（支架螺母打紧）
8. insulation grade of motor: CLASS B. level of motor protection IP42.
9. environment temperature: -25 ℃ ~50 ℃.
10. The line is 0.75 m long.（线长0.75米）

Mark:

MAER MOTORS & FANS SHADED POLE MOTOR
MODEL:YZF45L40P4-25
VOLTAGE:220V/50Hz
N.W/G.W. / KG
MEAS:44.5X34.5X12.5 CM
Quantity:12
CL.B
xxxxxxx

Nameplate:

YZF45L40P4-25
220V/50Hz 90W 0.70A 1300r/min
CL.B IP42 2022/11

Main motor parameters:

Motor model	UAC (V) ±5%	f (Hz)	P2 (W)	P1 (W)	I (A)	n (r/min)
YZF45L40P4-25	220	50	25	90	0.70	1300

版本/Ver.		Page 1		浙江马尔风机有限公司 MAER Fan Motor ZHEJIANG MAER FAN MOTOR CO.,LTD.
重量/WG.	Kg	签名/Name	日期/Date	产品规格书 Product Specification
绘图/Drawing				
审核/Checked				型号/Model YZF45L40P4-25
批准/Approved				品号 P/N
客户确认/Customer confirmation				