**D3G146-LT13-35**

# EC centrifugal fan

forward curved, dual inlet

with housing (flange)

**ebm-papst Mulfingen GmbH & Co. KG**
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

## Nominal data

| | |
|---|---|
| **Type** | **D3G146-LT13-35** |
| **Motor** | **M3G055-BI** |

| | | |
|---|---|---|
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Nominal voltage range | VAC | 200 .. 240 |
| Frequency | Hz | 50/60 |
| Type of data definition | | ml |
| Speed (rpm) | $min^{-1}$ | 1000 |
| Power input | W | 45 |
| Current draw | A | 0.4 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 60 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

# EC centrifugal fan

forward curved, dual inlet

with housing (flange)

## Technical features

| | |
|---|---|
| **Mass** | 2.2 kg |
| **Size** | 146 mm |
| **Surface of rotor** | Galvanised |
| **Material of electronics housing** | PP plastic |
| **Material of impeller** | PA plastic |
| **Housing material** | PP plastic |
| **Motor suspension** | Motor mounted anti-vibration on both sides |
| **Direction of rotation** | Counter-clockwise, seen on rotor |
| **Type of protection** | Motor IP 00, electronics IP 20; Depending on installation and position |
| **Insulation class** | "F" |
| **Humidity (F)/environmental protection class (H)** | H0 - dry environment |
| **Max. permissible ambient motor temp. (transp./ storage)** | + 80 °C |
| **Min. permissible ambient motor temp. (transp./storage)** | - 40 °C |
| **Mounting position** | Any |
| **Condensate discharge holes** | None, open rotor |
| **Cooling bore / aperture** | On rotor and stator sides |
| **Operation mode** | S1 |
| **Motor bearing** | Ball bearing |
| **Technical features** | - Output 10 VDC, max. 10 mA<br>- Motor current limit<br>- Soft start<br>- Control input 0-10 VDC / PWM<br>- Control interface with SELV potential safely disconnected from the mains<br>- Over-temperature protected motor |
| **EMC interference immunity** | Acc. to EN 61000-6-2 (industrial environment) |
| **EMC harmonics** | Acc. to EN 61000-3-2/3 |
| **EMC interference emission** | Acc. to EN 61000-6-3 (household environment) |
| **Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)** | <= 3.5 mA |
| **Electrical leads** | With plug |
| **Motor protection** | Thermal overload protector (TOP) wired internally |
| **Cable exit** | Variable |
| **Protection class** | I (if protective earth is connected by customer) |
| **Product conforming to standard** | EN 60335-1; CE |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC centrifugal fan

forward curved, dual inlet

with housing (flange)

## Product drawing

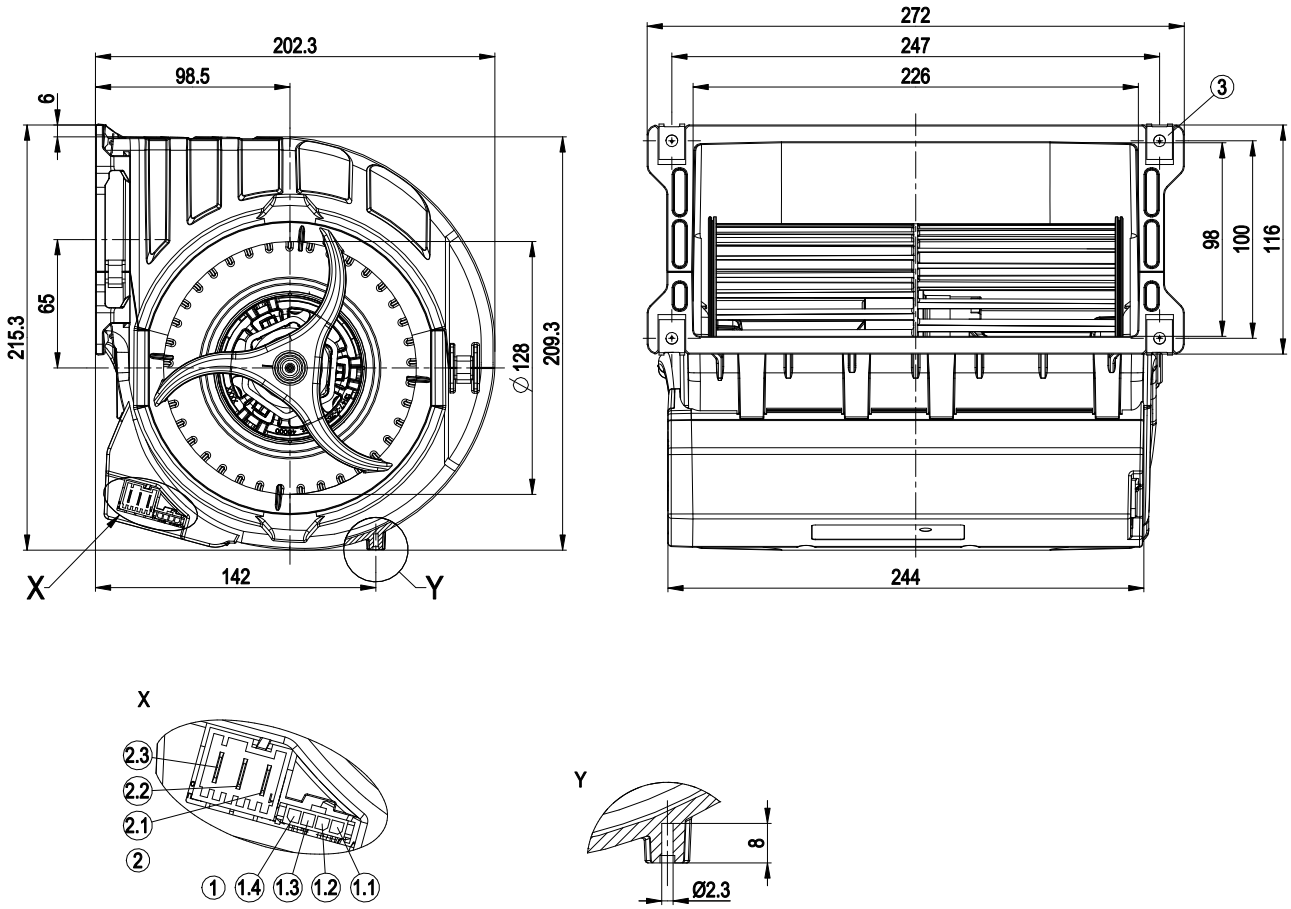


| | |
|---|---|
| 1 | Strip Molex Micro Fit 3.0 043650 0400 (pluggable with 043645 0400) |
| 1.1 | 10 V |
| 1.2 | HP/LP |
| 1.3 | 0-10 V lin. / PWM |
| 1.4 | GND |
| 2 | Connector Lumberg 3642 03 K01 (pluggable with 3626 03 K01) |
| 2.1 | PE |
| 2.2 | L |
| 2.3 | N |
| 3 | 4x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus thickness of mounting material) |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC centrifugal fan

forward curved, dual inlet

with housing (flange)

## Connection screen

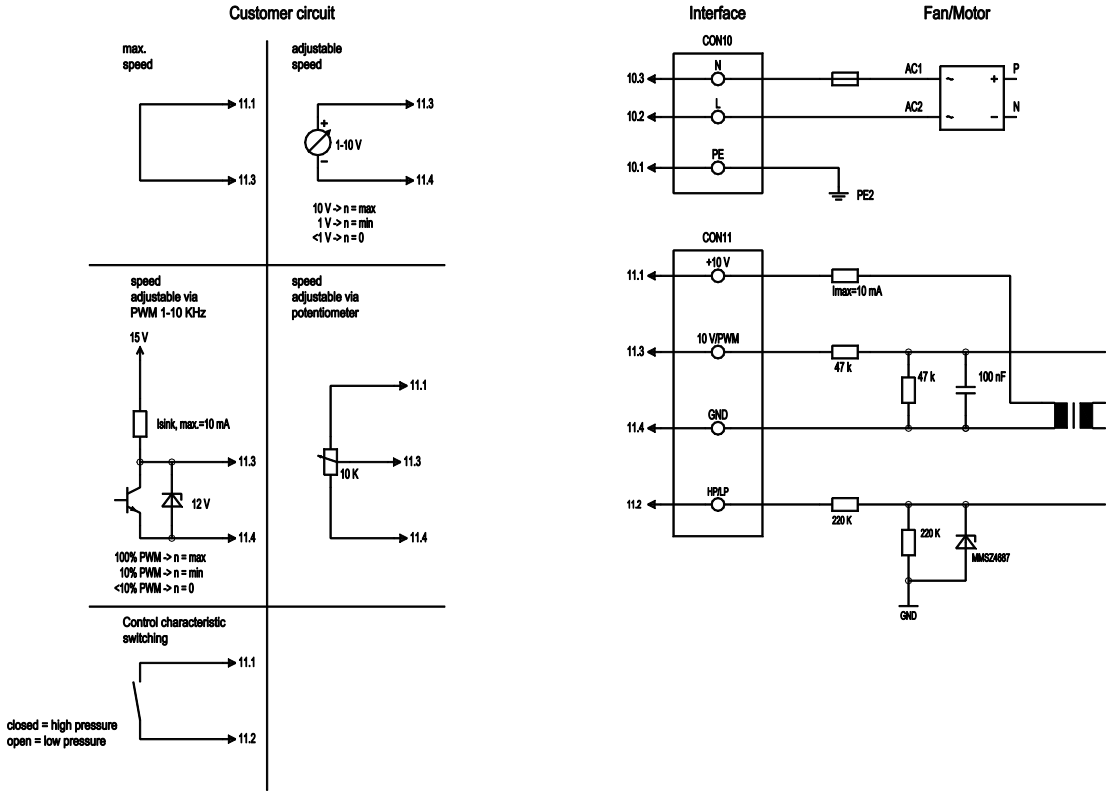


| No. | Conn. | Designation | Colour | Function / assignment |
|---|---|---|---|---|
| CON10 | 10.1 | PE | green/yellow | Protective earth |
| CON10 | 10.2 | L | black | Power supply 230 VAC, 50-60 Hz, see type plate for voltage range |
| CON10 | 10.3 | N | blue | Neutral conductor |
| CON11 | 11.1 | 10 V / max. 10 mA | red | Voltage output 10 V, 10 mA, electrically isolated, not short-circuit-proof |
| CON11 | 11.2 | HP / LP | white | Switching control characteristic, electrically isolated |
| CON11 | 11.3 | 0-10 V PWM | yellow | Control input 0-10 V or PWM, electrically isolated |
| CON11 | 11.4 | GND | blue | GND connection of control interface |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC centrifugal fan

forward curved, dual inlet

with housing (flange)

## Charts: Air flow 50 Hz

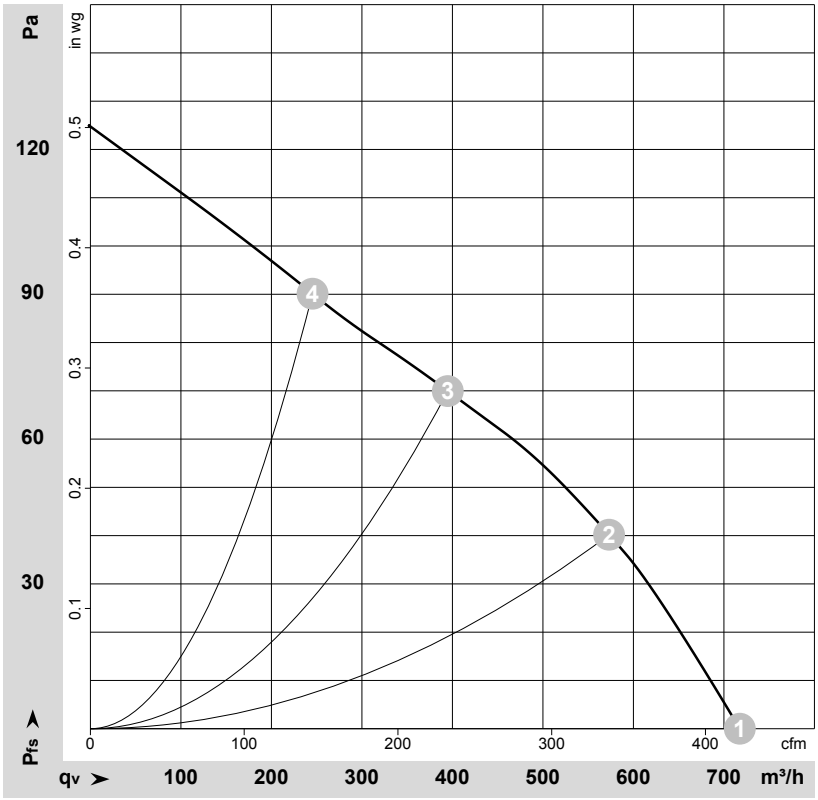


ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-177166-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

| | U | f | n | $P_{ed}$ | I | $q_V$ | $p_{fs}$ | $q_V$ | $p_{fs}$ |
|---|---|---|---|---|---|---|---|---|---|
| | V | Hz | $min^{-1}$ | W | A | $m^3/h$ | Pa | cfm | inH2O |
| 1 | 230 | 50 | 1000 | 45 | 0.40 | 720 | 0 | 425 | 0.00 |
| 2 | 230 | 50 | 1115 | 38 | 0.33 | 575 | 40 | 335 | 0.16 |
| 3 | 230 | 50 | 1230 | 30 | 0.26 | 395 | 70 | 230 | 0.28 |
| 4 | 230 | 50 | 1335 | 23 | 0.21 | 245 | 90 | 145 | 0.36 |

U = Supply voltage · f = Frequency · n = Speed (rpm) · $P_{ed}$ = Power input · I = Current draw · $q_V$ = Air flow · $p_{fs}$ = Pressure increase



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com