D3G146-HQ13-04

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

ErP2015 EXCEEDS THE NORM

Nominal data

Type	**D3G146-HQ13-04**
Motor	**M3G055-DF**

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Speed	min^{-1}	2400
Power input	W	230
Current draw	A	1.8
Min. back pressure	Pa	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	+50

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.00

* Specific ratio = 1 + p_{fs} / 100 000 Pa

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}		47.9	25.5	32.5
Efficiency grade N		59.4	37	44
Power input P_{ed}	kW	0.15		
Air flow q_v	m^3/h	505		
Pressure increase p_{fs}	Pa	453		
Speed n	min^{-1}	2715		

Data established at point of optimum efficiency

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)

Technical features

Mass	2.4 kg
Size	146 mm
Surface of rotor	Galvanised
Material of electronics housing	PP plastic, black
Material of impeller	PP plastic, white
Housing material	PP plastic, black
Motor suspension	Motor anti-vibration mounted on both sides
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	Motor IP54
Insulation class	"F"
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Over-temperature protected motor
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	With plug; Via terminal box
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)

Product drawing

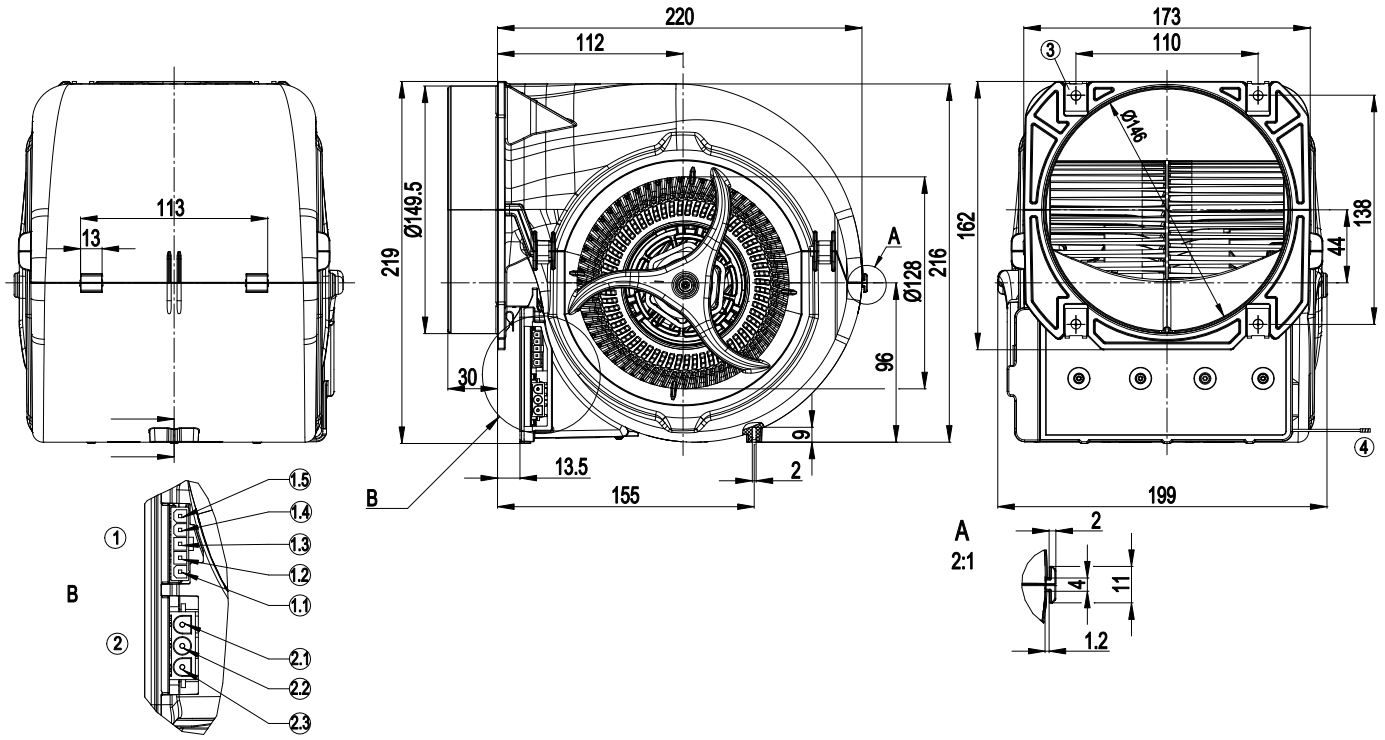

1	Strip Molex Mini-Fit 39-30-3055, pluggable with connector housing Molex 39-01-4050
1.1	10V
1.2	Tach
1.3	0-10V lin. / PWM
1.4	Not assigned
1.5	GND
2	Pin socket AMP Mate-N-Lok 1-350943-0, pluggable with connector housing AMP 350766-4
2.1	PE
2.2	N
2.3	L
3	4 x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus thickness of mounting material)
4	EMC earth, 1 x brass lead tip crimped


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)

Connection screen

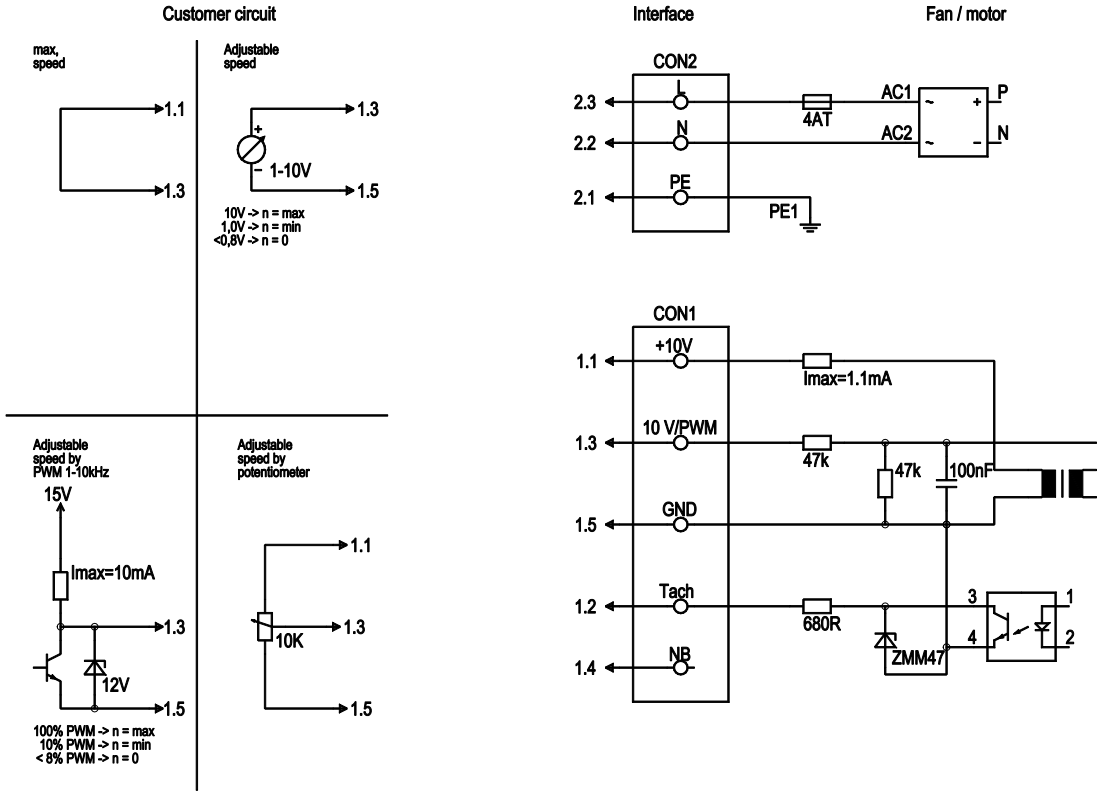

No.	Pin	Signal	Function / assignment
CON1	1.1	10 V/max. 1.1 mA	Voltage output 10 V/ 1.1 mA, electrically isolated
CON1	1.2	Tach	Tach output: open collector, 1 pulse per revolution, electrically isolated
CON1	1.3	0-10 V PWM	Control input 0 - 10 V or PWM, electrically isolated
CON1	1.4	NB	Not assigned
CON1	1.5	GND	GND - Connection for control interface
CON2	2.1	PE	Protective earth
CON2	2.2	N	Neutral conductor
CON2	2.3	L	Power supply 230 VAC, 50-60 Hz, for voltage range refer to rating plate


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)

Charts: Air flow 50 Hz

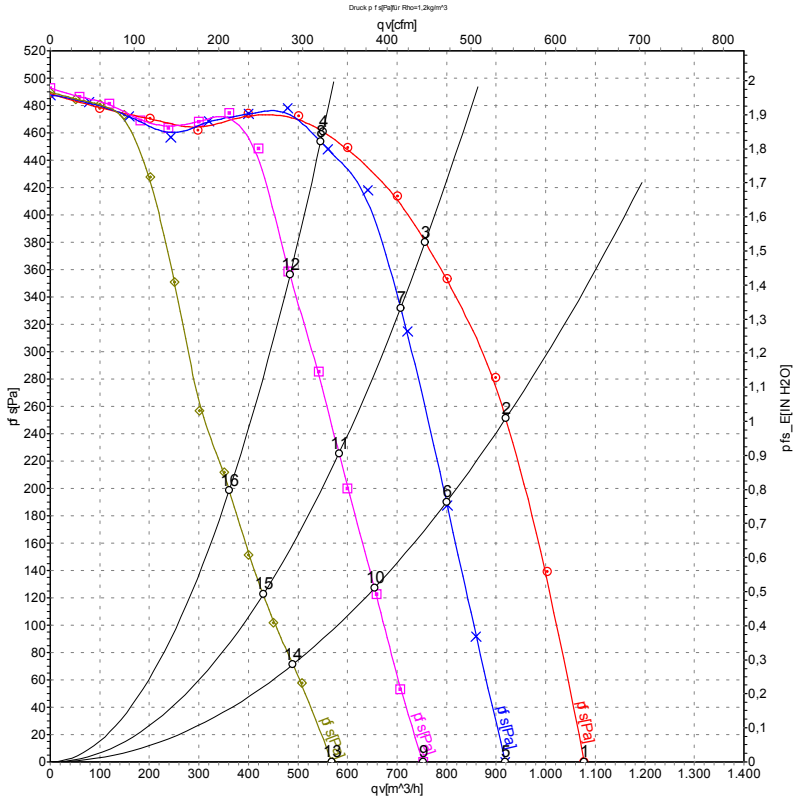

Measurement: LU-134808
Measurement: LU-132420
Measurement: LU-132422
Measurement: LU-132424

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P_{ed}	I	qv	p_{fs}
	V	Hz	min^{-1}	W	A	m^3/h	Pa
1	230	50	1790	189	1.47	1080	0
2	230	50	2400	230	1.80	920	250
3	230	50	2535	206	1.61	755	380
4	230	50	2705	164	1.30	550	460
5	230	50	1535	118	0.97	920	0
6	230	50	2040	154	1.21	800	191
7	230	50	2395	175	1.38	705	333
8	230	50	2695	169	1.33	545	454
9	230	50	1265	66	0.57	750	0
10	230	50	1675	85	0.71	655	128
11	230	50	1975	98	0.82	585	225
12	230	50	2380	118	0.96	485	354
13	230	50	970	29	0.27	570	0
14	230	50	1275	38	0.34	490	72
15	230	50	1490	43	0.37	430	122
16	230	50	1800	52	0.44	360	199

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com