


The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights created by the patent grant or the registration of a utility model or design patent are reserved. (ISO 16016)
Note: In the case of multilingual information in this document and in the applicable documents referred to in this document, only the English version shall be deemed current and legally binding in the event of contradictions in content.

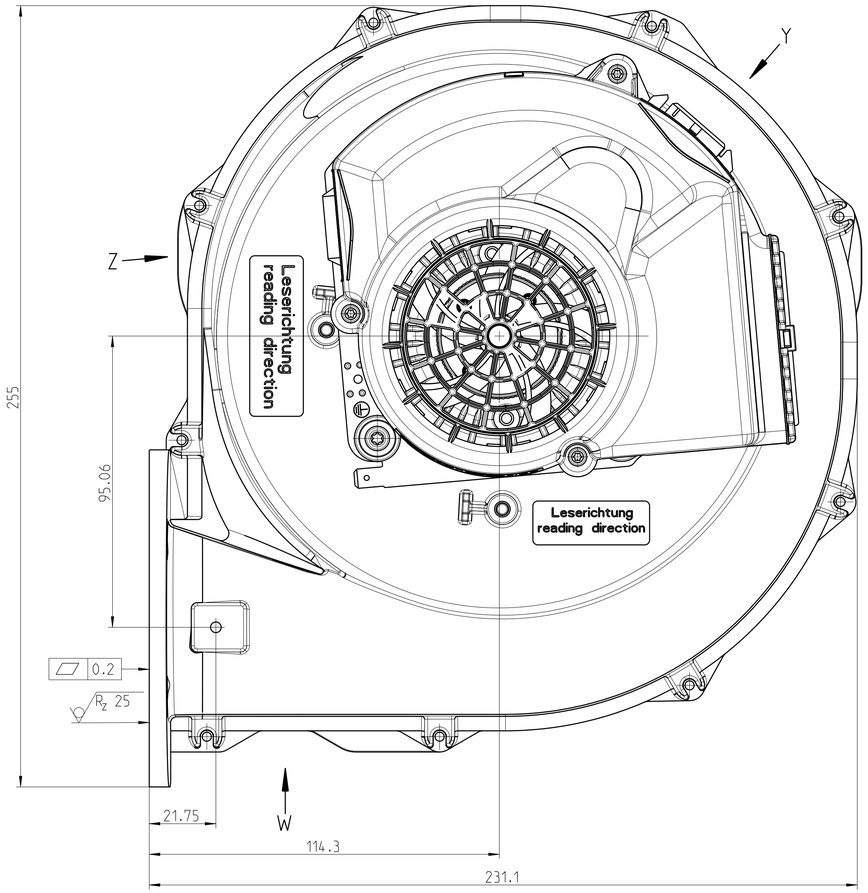


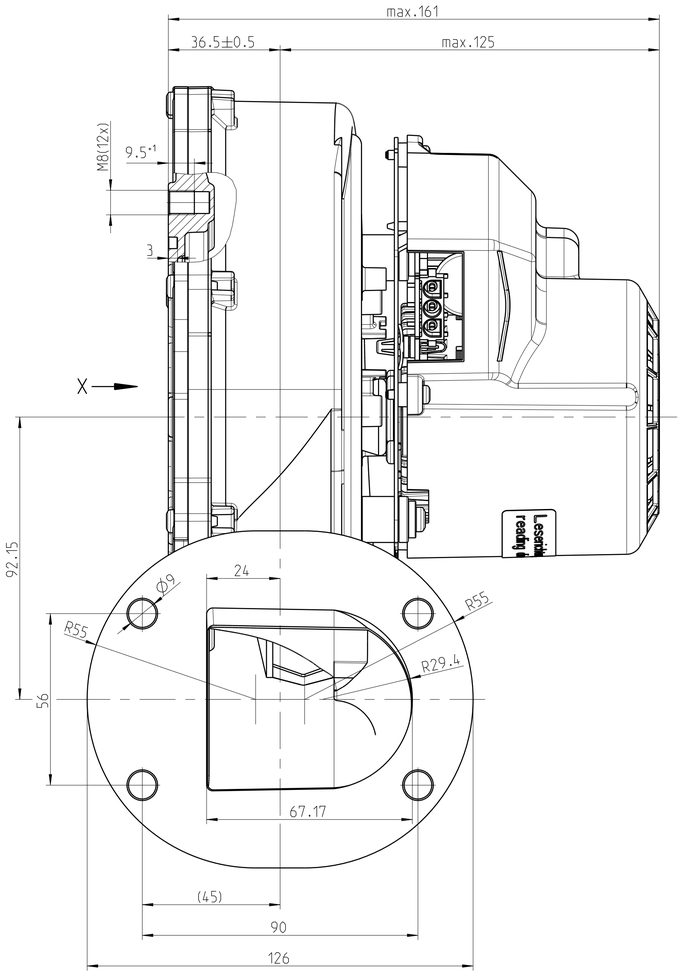

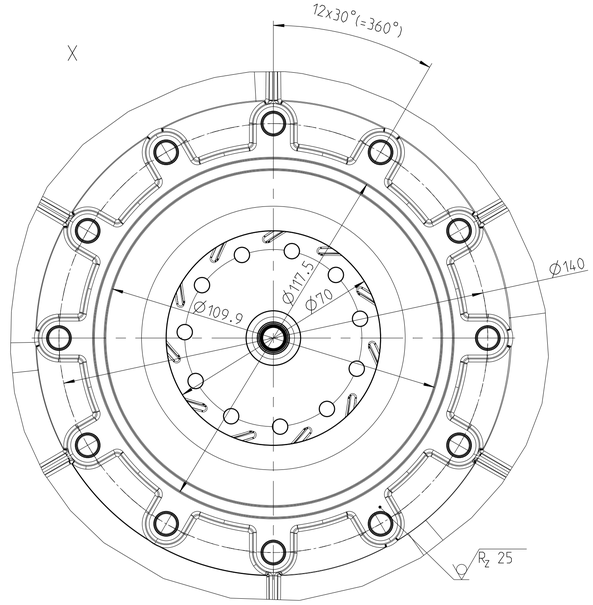

Z


Connector housing / Steckergehaeuse
e.g./z.B. AMP Universal MATE-N-LOK
1-350943, 3-polig
suitable for / passend fuer:
z.B./e.g. AMP Universal MATE-N-LOK
Connector housing / Steckergehaeuse:
350766-4 u. 3x terminal / Buchse
926882-1 (oder 926893-1)




Y

5-pin plug connector 90° angled / horizontal design
in spacing 4.2 mm
suitable for mating connector e.g.
CoHaMo YY-5700-H05AS-GW, also
Stocko EH 705-005-004-960 or with same
configuration connectors e.g. Molex Mini-Fit Jr

5-polige Stiftleiste in 90° abgewinkelter / liegender Ausfuehrung
im Rastermaß 4.2 mm
passend fuer Gegenstecker z.B.
CoHaMo YY-5700-H05AS-GW bzw.
Stocko EH 705-005-004-960 oder baugleiche
Stecker z.B. Molex Mini-Fit Jr



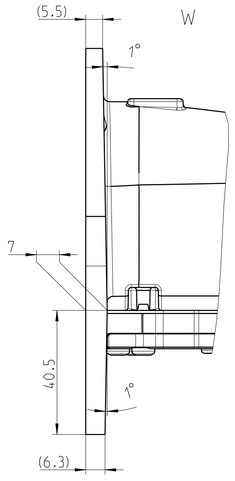

max. fastening torque for thread and
thread grooving screws with screw-in depth of 6 mm:
max. Anzugsmoment fuer Gewinde und gewindefurchende
Schrauben bei einer Einschraubtiefe von 6 mm:
M4: 3 Nm
M5: 4 Nm
M6: 6 Nm
M8: 10 Nm

Fan wheel antistatic:
surface resistance < 10^9 Ohm according to
DIN 53 486/VDE 0303 Teil 8 and DIN IEC 60093

Luefterschaufelrad antistatisch:
Oberflaechenwiderstand < 10^9 Ohm nach
DIN 53 486/VDE 0303 Teil 8 und DIN IEC 60093

IMPORTANT - further applicable documents:
4 - Specification 5566714100_B03
- 02 Installation, safety and maintenance instructions for built-in components that convey gas-air mixture in the current valid version

WICHTIG - weitere mitgeltende Unterlagen:
4 - Spezifikation 5566714100_B03
- 02 Einbau-, Sicherheits- und Wartungshinweise fuer Gas-Luft-Gemisch foerdernde Einbaukomponenten in der aktuell gueltigen Version

4 = Change index / Aenderungsindex

Title: mounting instruction / Einbauanleitung radial blower / Radialluefter VGR0175XSHGZ			Note to index: B03-spezifikation added B03-Spezifikation hinzugefuegt
First created for: 5566714100_Z10	Index: 4	Doc type: DRW	Sheet: 1 of 1
	Designed name: A. Michalski	Designed date: 05.12.2022	
Substitute for:	Released name: Thiemann	Released date: 13.12.2022	
ebmpapst ebm-papst Landshut GmbH	Tolerances: DIN ISO 2768:1989-cK		
	Scale: 1:1	Format: A1	Document status: Freigegeben

Origin: VGR0175	
Name:	
Geometrical key:	
Change-No.: 500000025892	Former type designation: RG175/2000-3633-010204 -CCC
Material:	
Surface:	Final state:
Tolerances ISO 8015	