
Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

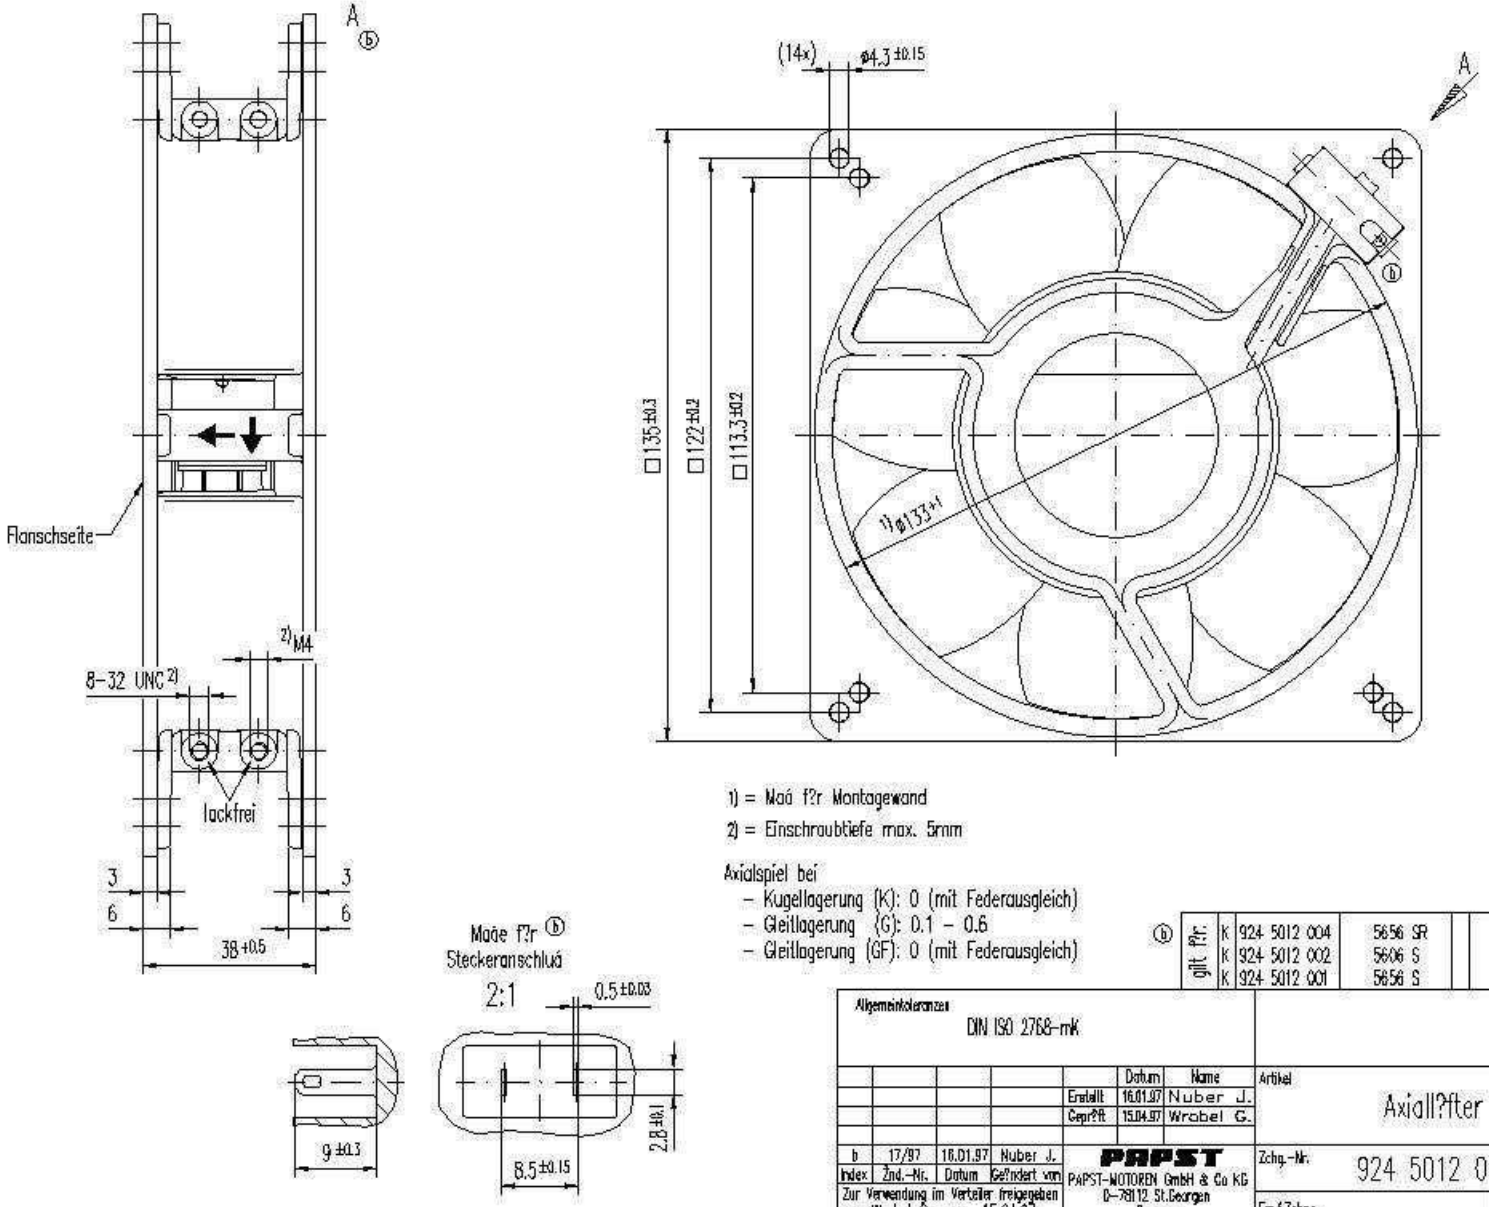

1) = Maá f?r Montagewand

2) = Einschraubtiefe max. 5mm

Axialspiel bei
- Kugellagerung (K): 0 (mit Federausgleich)
- Gleitlagerung (G): 0.1 – 0.6
- Gleitlagerung (GF): 0 (mit Federausgleich)

ⓑ	gilt f?r:			
	K	924 5012 004	5656 SR	
	K	924 5012 002	5606 S	
	K	924 5012 001	5656 S	

Allgemeintoleranzen: DIN ISO 2768-mK

					Datum	Name
				Erstellt	16.01.97	Nuber J.
				Gepr?ft	15.04.97	Wrobel G.
b	17/97	16.01.97	Nuber J.			
Index	Znd.-Nr.	Datum	Geändert von			

Zur Verwendung im Verteiler freigegeben von Wrobel G. am 15.04.97

PAPST
PAPST-MOTOREN GmbH & Co KG
D-78112 St.Georgen
Germany

Artikel: Axiall?fter

Maßstab: 1:1 (2:1)

Zchg.-Nr.: 924 5012 001

Blatt 2

Ers.f.Zchg.:

P:\924\5012\

Stückzahl nach DIN 34 beachten

516
3...
045
243
240
235
232
231
210

ebmpapst