

5656 SU-007

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 4

3 Operating Data 5

3.1 Electrical Operating Data 5
3.2 Operating Data - Electrical Interface -Output 6
3.3 Electrical Features 6
3.4 Aerodynamic 6
3.5 Sound Data 7

4 Environment 7

4.1 General 7
4.2 Climatic requirements*) 7

5 Safety 9

5.1 Electrical Safety 9
5.2 Approval Tests 9

6 Reliability 9

6.1 General 9

1 General

Fan type	Fan
Rotational direction looking at rotor	counterclockwise
Airflow direction	Air outlet over struts
Bearing system	Ball bearing
Mounting position	any
Balancing grade	2,5

2 Mechanics

2.1 General

Width	135,0 mm	
Height	135,0 mm	
Depth	38,0 mm	
Weight	0,800 kg	
Housing material	Metal	
Impeller material	Metal	
Max. torque when mounted across both mounting flanges Screw size	wire outlet corner: 160 Ncm remaining corners: 190 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Length of lead wire Tolerance	310,0 mm +- 10,0 mm	
Wire gauge (AWG)	22	
Insulation diameter	1,62 mm	





	Colour	Operation
Wire 1	black	L
Wire 2	black	N

3 Operating Data

3.1 Electrical Operating Data

Measurement conditions:	Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal;warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.4)
I: corresp. to RMS line current


Features	Condition	Symbol	Values	
Frequency	$\Delta p = 0$	f	50 Hz	60 Hz
Nominal voltage Tolerance	$\Delta p = 0$	U_N	230,0 V +- 10,0 %	230,0 V +- 10,0 %
Power consumption Tolerance	$\Delta p = 0$	P	30,0 W + 5,0 % - 10,0 %	28,0 W + 5,0 % - 10,0 %
Speed Tolerance	$\Delta p = 0$	n	2.700 1/min +- 3,0 %	3.100 1/min +- 3,0 %

3.2 Operating Data - Electrical Interface -Output

Tacho type	None

3.3 Electrical Features

Locked rotor protection	Thermal circuit breaker
Locked rotor current at Un	

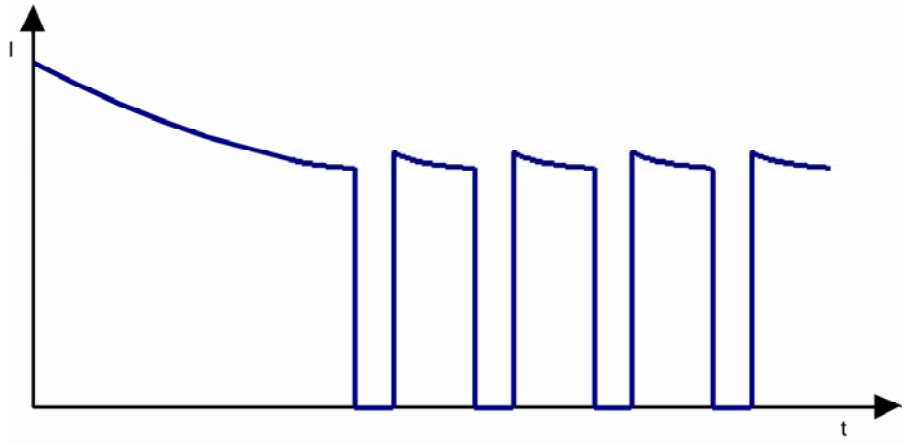

3.4 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.
Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C;
In the intake and outlet area should not be any solid obstruction within 0,5 m.

a.) Operation condition:
2.700 1/min at free air flow Frequency: 50 Hz

Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)	240,0 m3/h
Max. static pressure (Δp = max. / $\dot{V}$ =0)	95 Pa

b.) Operation condition:
3.100 1/min at free air flow Frequency: 60 Hz

Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)	275,0 m3/h
Max. static pressure (Δp = max. / $\dot{V}$ =0)	110 Pa

3.5 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.4

a.) Operation condition:
2.700 1/min at free air flow Frequency: 50 Hz

Optimal operating point	185,0 m3/h @ 29 Pa	
Sound power level at the optimal operating point	6,0 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	47,0 dB(A)	

b.) Operation condition:
3.100 1/min at free air flow Frequency: 60 Hz

Optimal operating point	210,0 m3/h @ 36 Pa	
Sound power level at the optimal operating point	6,3 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	51,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-35 °C / 50 Hz -35 °C / 60 Hz	
Max. permitted ambient temperature TU max.	70 °C / 50 Hz 80 °C / 60 Hz	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements*)

Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Water exposure	Splash water check IPX4; according to DIN EN 60529 VDE 0470, not certified	
Radiation exposure	Solar radiation; according to DIN EN 60068-2-5	
Dust requirements	Dust check IP5X; according to DIN EN 60529 VDE 0470, not certified	
Salt fog requirements	None	
Harmful gas requirements	None	

*) Permittet application area:
The product is for the use in partial sheltered rooms or open, roofed areas. Direct exposure to water is allowed provided that this does not prevent the normal operation. Saline ambient conditions must be avoided.

Pollution degree 3 (according DIN EN 60664-1)
It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	1500 VAC / 1 Min. 1500 VAC / 1 Sec.
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 50 MOhm
Air and leakage distances	2,0 mm / 1,8 mm
Protection class	I

5.2 Approval Tests

CE	Yes
UL	Yes / UL507, Electric Fans
VDE	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Yes / C22.2 No. 113 Fans and Ventilators
CCC	Yes / GB 12350 Safety Requirements for small Power Motors

The approval tests are observed to:
U approval max.: 230 V / f: 50 and 60 Hz @ TU approval max.: 70 °C


6 Reliability


6.1 General

Life expectancy L10 at TU = 40 °C	45.000 h / 50 Hz 47.500 h / 60 Hz	
Life expectancy L10 at TU max.	20.000 h / 50 Hz 20.000 h / 60 Hz	

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN 34 beachten

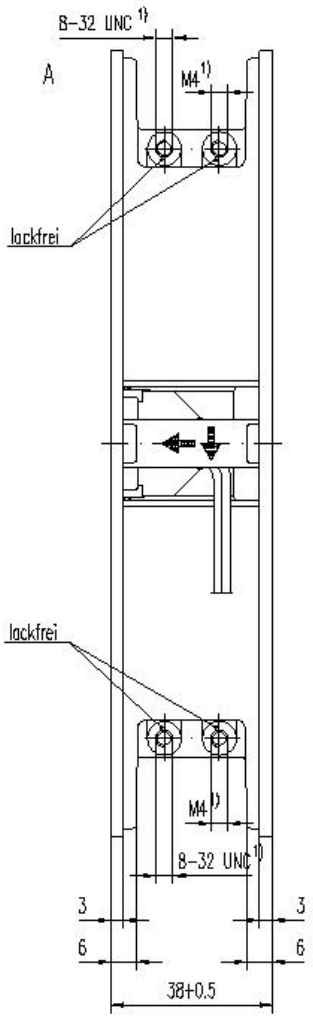

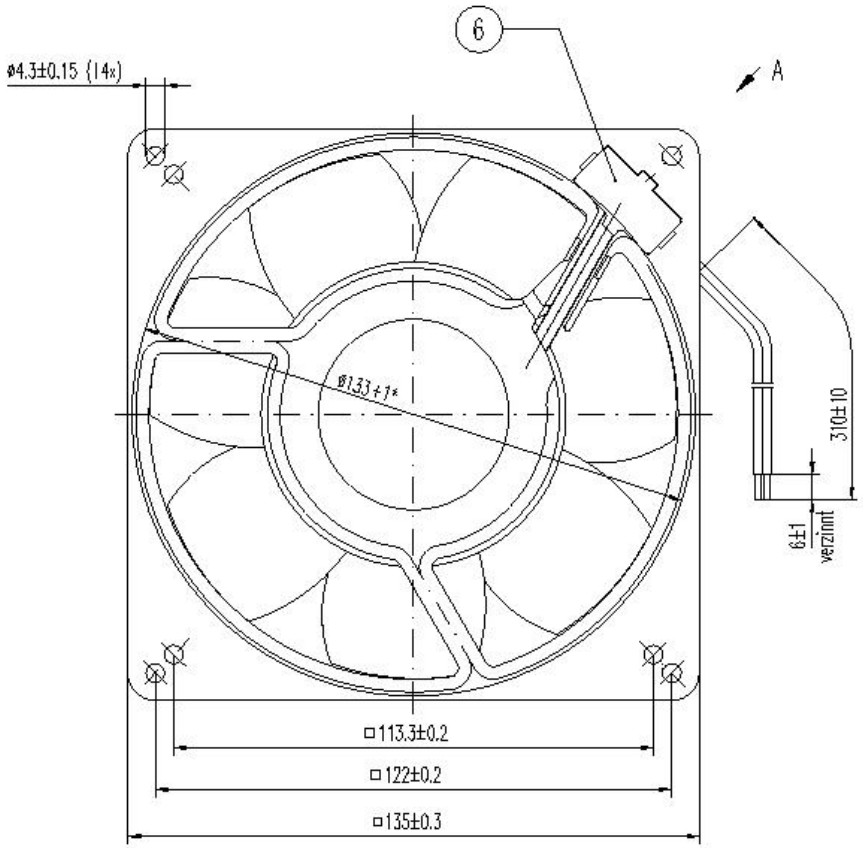

* = Maá f?r Montagewand

Axialspiel: mit Feder spielfrei verspannt

1) Einschraubtiefe max. 5mm

082
210
232
235
240
516

Allgemeintoleranzen						gilt f?r: 924 5012 007(K) 5656 SU-007 924 5012 008(K) 5605 SU-008
					Datum	Name	Artikel: Axiall?fter	Nicht. 1:1
				Erstellt	20.09.96	Winkler M.		
				Cepr?ft	28.10.96	Wrobel G.		
a	Ergänzung	15.12.97	Kieninger				Zchg.-Nr.: 924 5012 007	Blatt 2
Index	Änd.-Nr.	Datum	Geändert von	PAPST-MOTOREN GmbH & Co KG D-78112 St.Georgen Germany				
Zur Verwendung im Verteiler freigegeben von Koletzki M. am 16.12.97							Ers.f.Zchg.:	P:\924\5012\