Product Data Sheet 4118 N/2H5P-308

ebmpapst

The engineer's choice



GREEN TECH

4118 N/2H5P-308
INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 5

3.1 Operating Data - Electrical Interface - Input 5
3.2 Electrical Operating Data 6
3.3 Operating Data - Electrical Interface - Output 7
3.4 Electrical Features 8
3.5 Aerodynamics 10
3.6 Sound Data 11

4 Environment 11

4.1 General 11
4.2 Climatic Requirements 11

5 Safety 12

5.1 Electrical Safety 12
5.2 Approval Tests 12

6 Reliability 12

6.1 General 12

1 General

Fan type	Fan	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air intake over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	

2 Mechanics


2.1 General

Width	119,0 mm	
Height	119,0 mm	
Depth	38,0 mm	
Mass	0,380 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	wire outlet corner: 420 Ncm remaining corners: 600 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length Tolerance	L = 310 mm +- 10,0 mm	
Wire size (AWG)	22	
Insulation diameter	1,70 mm	
Contact	See drawing	



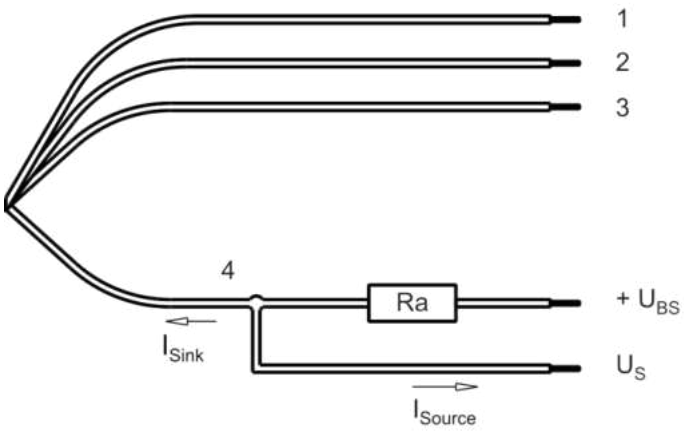

Wire	Colour	Operation
1	red	+ UB
2	blue	- GND
3	violet	PWM
4	white	Tacho

The auxilliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

3 Operating Data


3.1 Operating Data - Electrical Interface - Input

Control input	PWM


Features

Inpute type	Open collector	
PWM - Frequency		1 kHz - 10 kHz Typical: 2 kHz

Characteristics

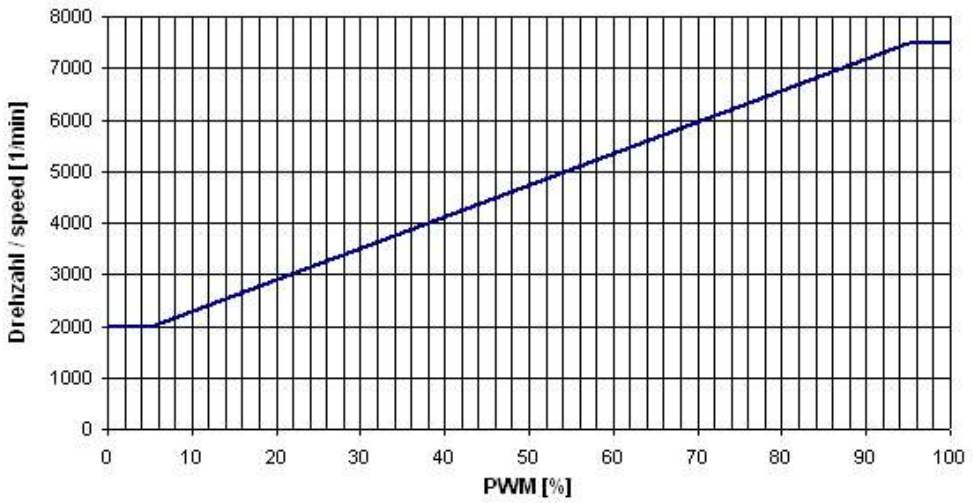

Schematics

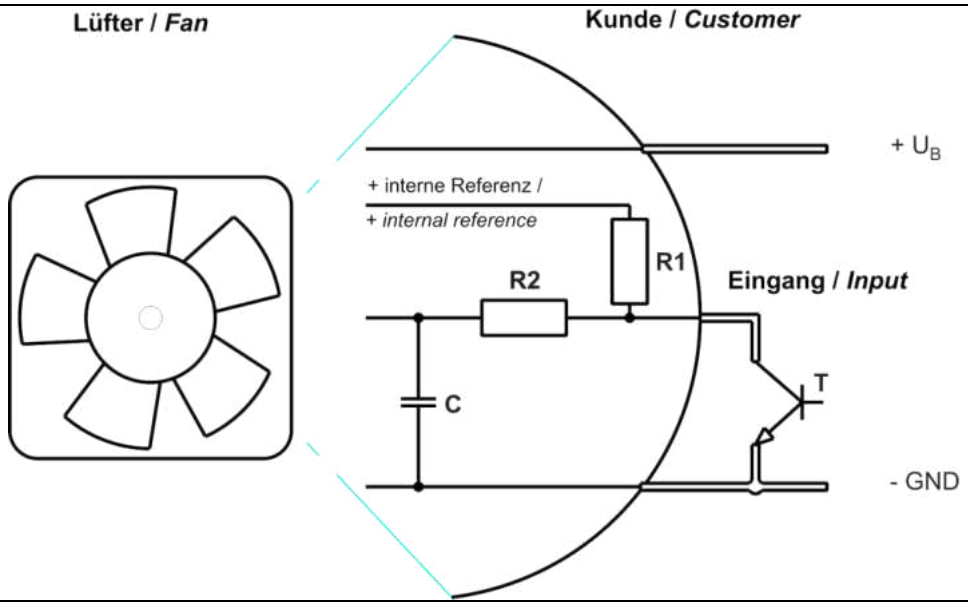

Speed control:
0...100 % PWM; 5 V pull-up, max 2 mA

Transistor requirements:
VCEmax. >12V
Isink max. >5mA
VCEsat <0,15V

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

Δp = 0: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Name	Condition		
PWM 0001	PWM: 100 %; f: 2 kHz		


Note:
No inrush current at Unom means:

The internal electrolytic capacitor 39uF/100V has no resistor or inrush current limitation, essentially the type and length of the connecting cable is limiting the Inrush current.


Features	Condition	Symbol	Values		
Voltage range		U	36 V		60 V
Nominal voltage		U_N		48 V	
Power consumption Tolerance	Δp = 0 PWM 0010	P	23,4 W +- 15 %	44 W +- 10 %	42,0 W +- 10 %
Current consumption Tolerance	Δp = 0 PWM 0010	I	650 mA +- 15 %	870 mA +- 10 %	700 mA +- 10 %
Speed Tolerance	Δp = 0 PWM 0010	n	6.200 1/min +- 10 %	7.500 1/min +- 7,5 %	7.500 1/min +- 7,5 %

3.3 Operating Data - Electrical Interface - Output

Tacho type	/2 (open collector)

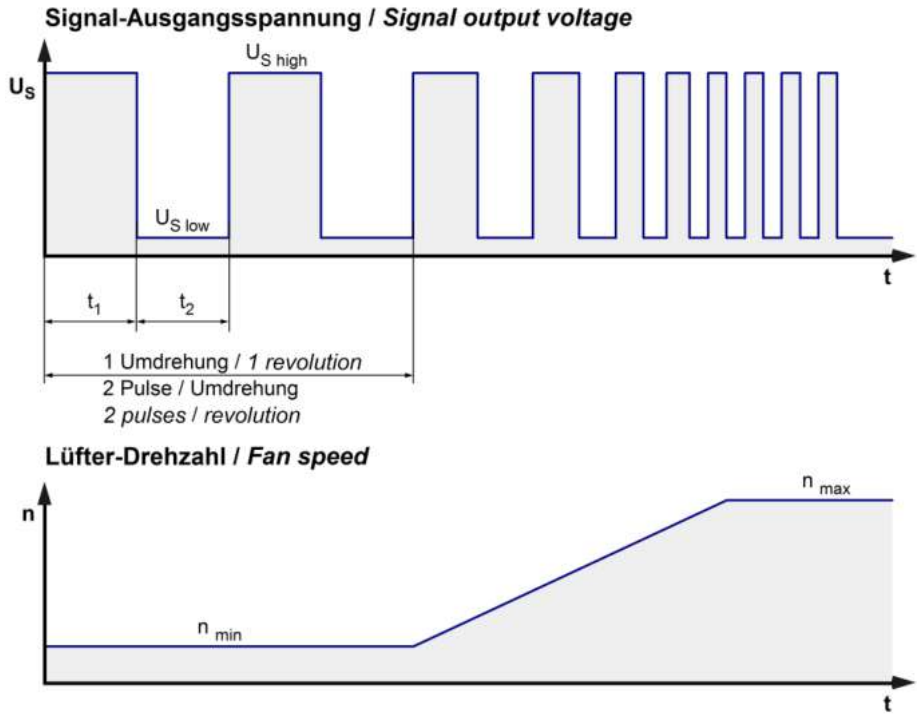


$$Ra = \frac{U_{BS} - U_{S\,low}}{I_{sink}}$$

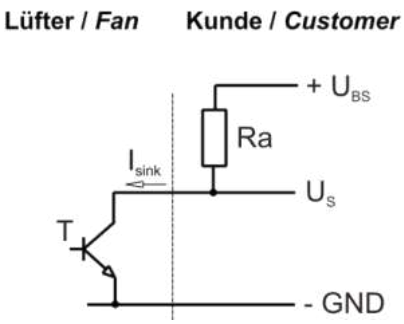


Features	Note	Values
Tacho operating voltage (UBS)		<= 60,0 V
Tacho signal Low	I sink: 2 mA	<= <= 0,4 V
Tacho signal High	I source: 0 mA	
External resistor	External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency	(2 x n) / 60	
Tacho isolated from motor	No	
Slew rate		=> 0,5 V/us

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at U_N	Rectifying diode I_F <= 10 mA	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 2.300 mA	
Clock signal at locked rotor	t_3 / t_4 Typical: 0,5 s / 5,0 s	

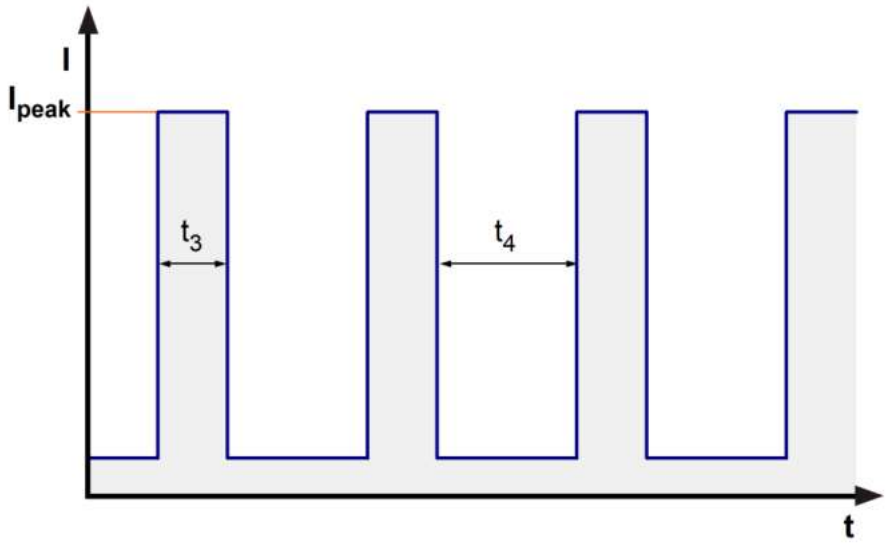

Internal Fuse:
Littelfuse NANO2(R) FUSE; Very fast acting 451 Series; 4 A (Art.-Nr.: 451004)

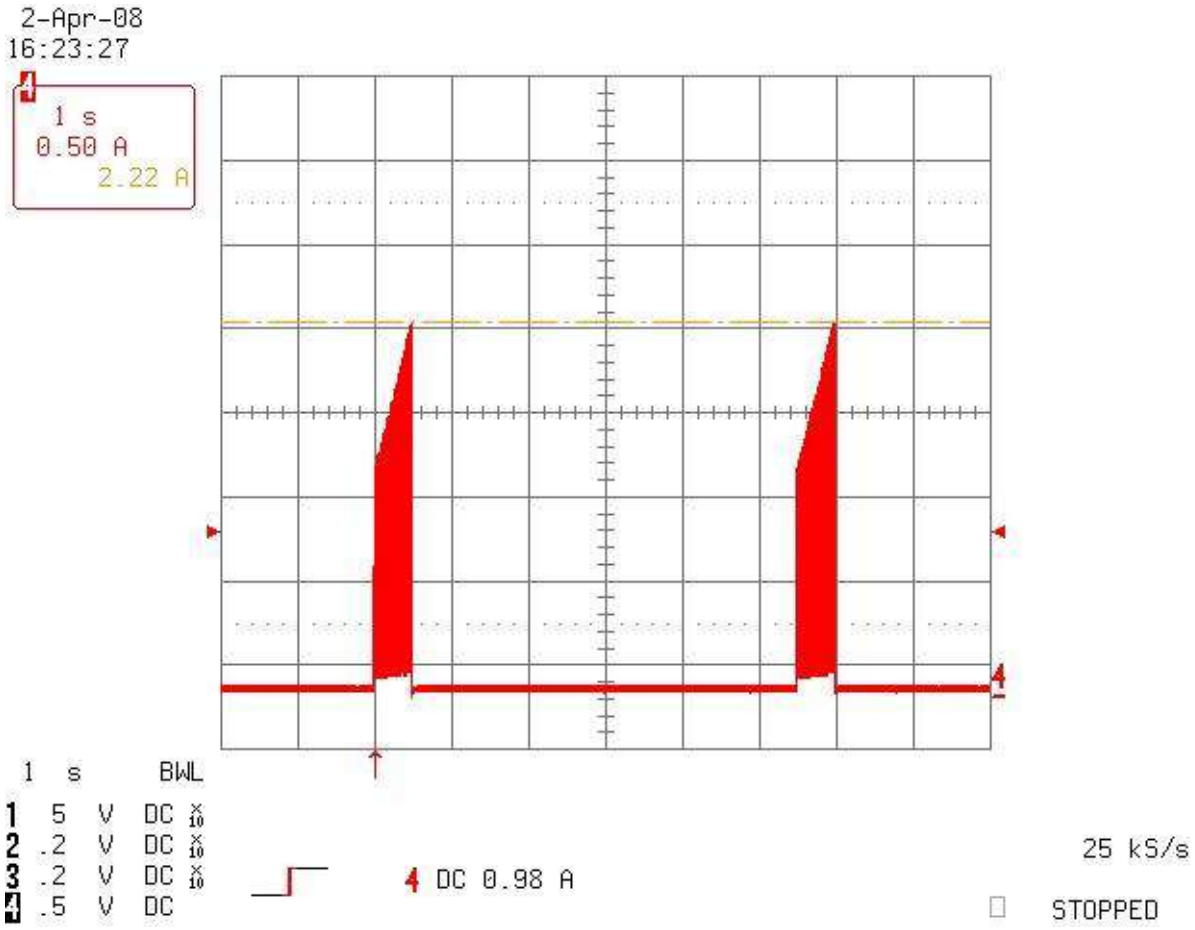
2-Apr-08
16:23:27
1 s
0.50 A
2.22 A
1 s BWL
1 5 V DC
2 .2 V DC
3 .2 V DC
4 .5 V DC
4 DC 0.98 A
25 kS/s
STOPPED


3.5 Aerodynamics

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

7.500 1/min at free air flow	PWM 100 %; f: 2 kHz		

Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)	390,0 m3/h	
Max. static pressure (Δp = max. / $\dot{V}$ =0)	595 Pa	

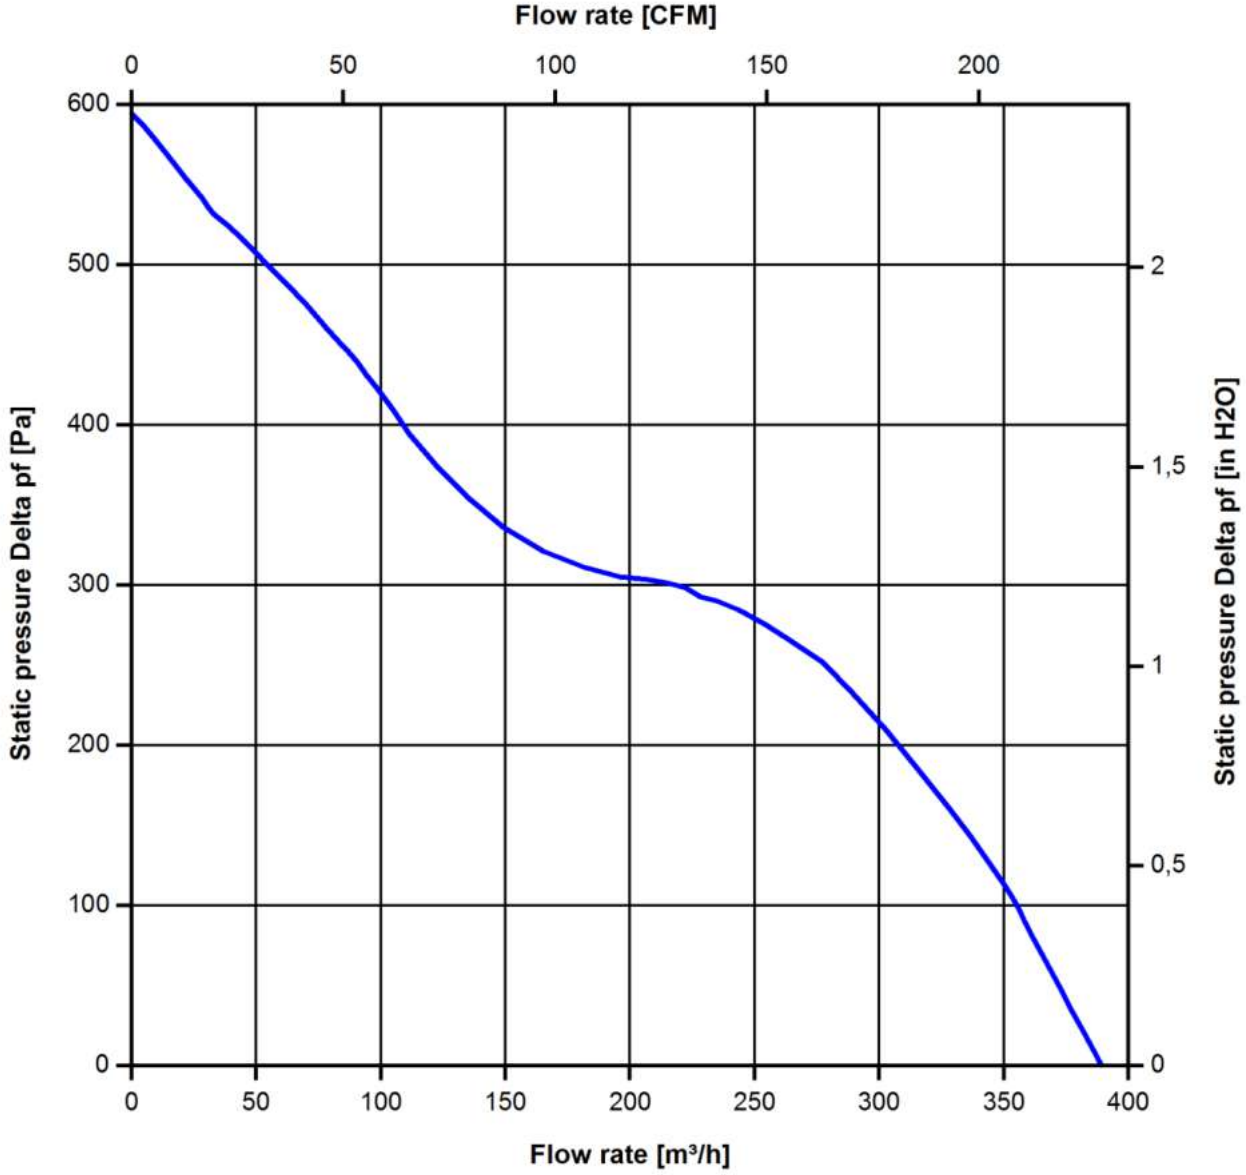

3.6 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

7.500 1/min at free air flow	PWM 100 %; f: 2 kHz	PWM min.:	PWM max.:

Optimal operating point	297,0 m3/h @ 193 Pa	
Sound power level at the optimal operating point	7,7 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	70,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

*) Permittet application area:
The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)
There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	III	

5.2 Approval Tests


CE	EC Declaration of Conformity	No
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

The approval tests are observed to:
U approval max.:60,0 V @ TU approval max.: 65,0 °C

6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	62.500 h	
Life expectancy L10 at TU max.	35.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	105.000 h	

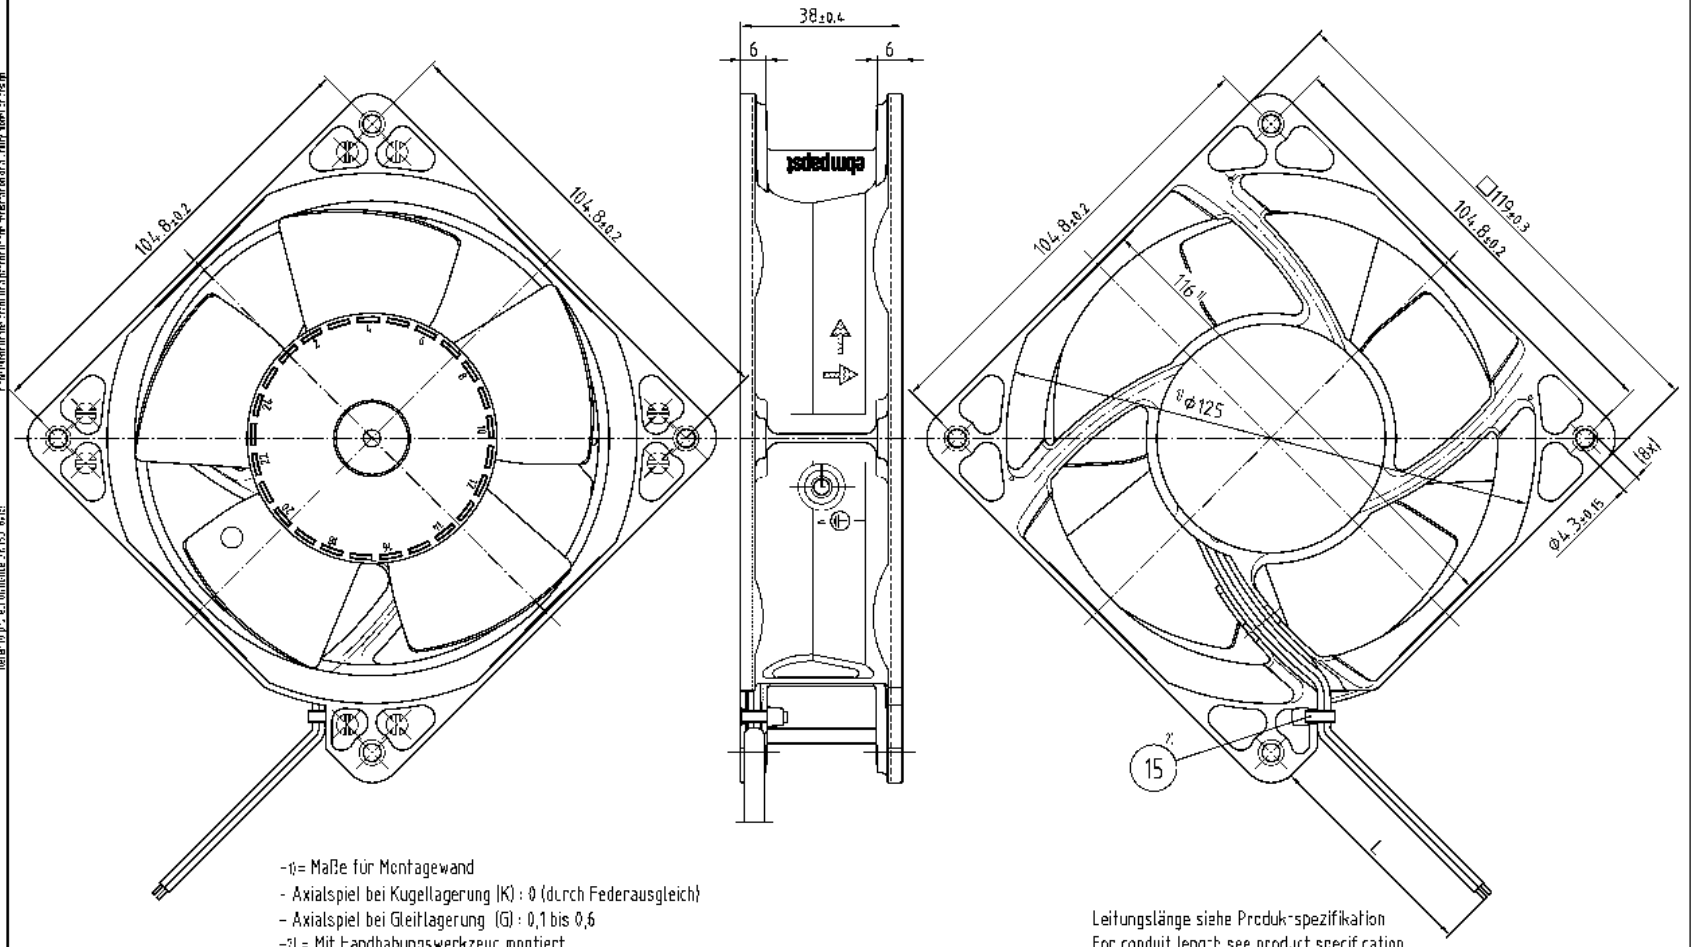

-1)= Maße für Montagewand
- Axialspiel bei Kugellagerung (K) : 0 (durch Federausgleich)
- Axialspiel bei Gleitlagerung (G) : 0,1 bis 0,6
-2) = Mit Handhabungswerkzeug montiert,
Kopf darf nach Montage nicht über Außenkontur des Lüftergehäuses stehen

-1)= Measures for prefab wal.
- Axial play with ball bearing (K) 0 (by spring compensation)
- Axial play with sleeve bearing (G): 0,1 to 0,6
-2) = With handling tool installed,
Head may not stand over outer contour of the fan housing after assembly

Leitungslänge siehe Produkt-spezifikation
For conduit length see product specification

			ebmpapst	Werkstoff/Material:	Vc Line 1/Vc Line 1 [m³]
SAP-Status/Scale	Kund.-Änderungs-Nr.	Art/CAD-Symbol-Marker	CAD Umgebung/ CAD Environment		Gewicht/Mass [g]
		Datum/Date	Name/Name		
Toleranzen/Tolerances: Allgemeintoleranzen/Gen. tolerances DIN ISO 2768-1 u. 2-mK		Bearb./ Drawn		Artikel/Title: axial compact fan	
		Gepr./ Checked			
		Freig./ Released			
ebmpapst				Zeichn.-Nr./ Drawing-No.:	Ers. f. Zeichn./ Replaces
ebm-papst St. Georgen GmbH & Co. KG				Dokumentenart/Type of Document	Format/Size

Schutzvermerk nach DIN 34 beachten/ Observe protection notice DIN 34