Product Data Sheet RER175-42/18/2TDMP

ebmpapst

The engineer's choice



GREEN TECH

RER175-42/18/2TDMP
INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 5

3.1 Operating Data - Electrical Interface - Input 5
3.2 Electrical Operating Data 6
3.3 Operating Data - Electrical Interface - Output 7
3.4 Electrical Features 8
3.5 Data According ErP Directive 8
3.6 Aerodynamics 9
3.7 Sound Data 11

4 Environment 11

4.1 General 11
4.2 Climatic Requirements 11

5 Safety 12

5.1 Electrical Safety 12
5.2 Approval Tests 12

6 Reliability 12

6.1 General 12

1 General

Fan type	Blower without chassis with intake nozzle	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air in axially, Air out radially	
Bearing system	Ball bearing	
Mounting position - shaft	Any	

2 Mechanics


2.1 General

Depth	69 mm	
Diameter	175 mm	
Mass	0,844 kg	
Housing material		
Impeller material	Plastic	

2.2 Connections

Electrical connection	Wires	
Lead wire length Tolerance	L = 425 mm +- 10 mm	
Tube length Tolerance	S = 115 mm +- 5 mm	
Wire size (AWG)	22	
Insulation diameter	1,7 mm	
Contact	See drawing	



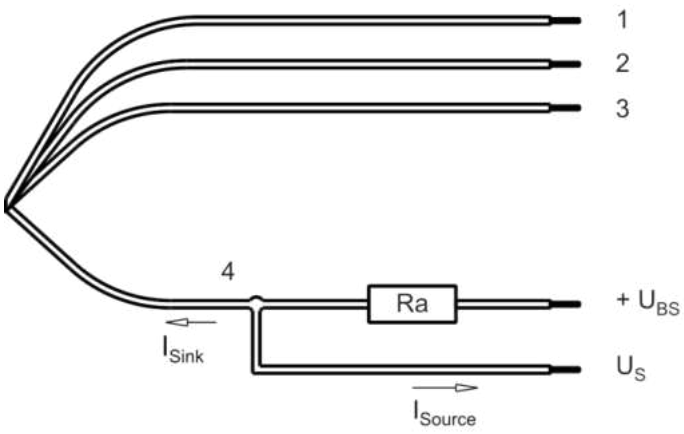

Wire	Colour	Operation
1	red	+ UB
2	blue	- GND
3	violet	PWM
4	white	Tacho

The auxilliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

Lead wire 1 - 2: AWG22 (Insulation diameter 1,7mm)
Lead wire 3 - 4: AWG22 (Insulation diameter 1,7mm)

3 Operating Data


3.1 Operating Data - Electrical Interface - Input

Control input	PWM


Features

PWM - Frequency		1 kHz - 10 kHz Typical: 2 kHz

Characteristics

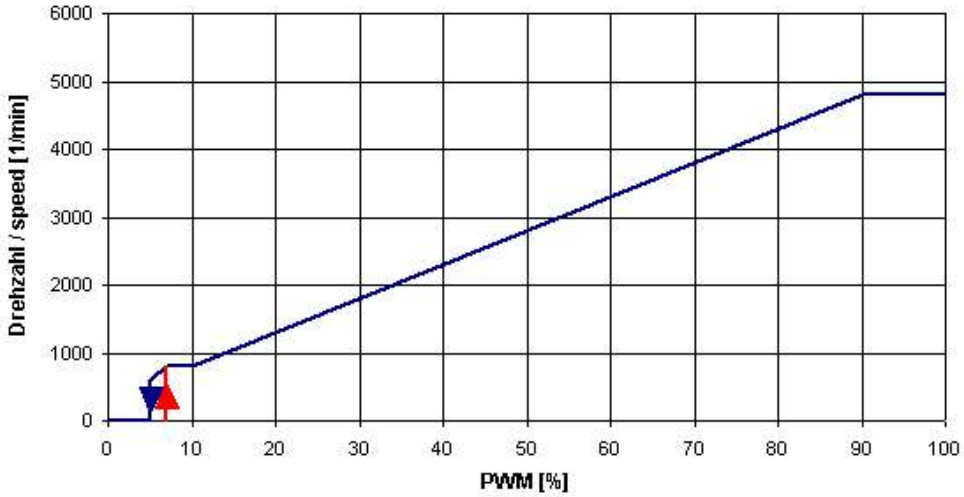

Schematics

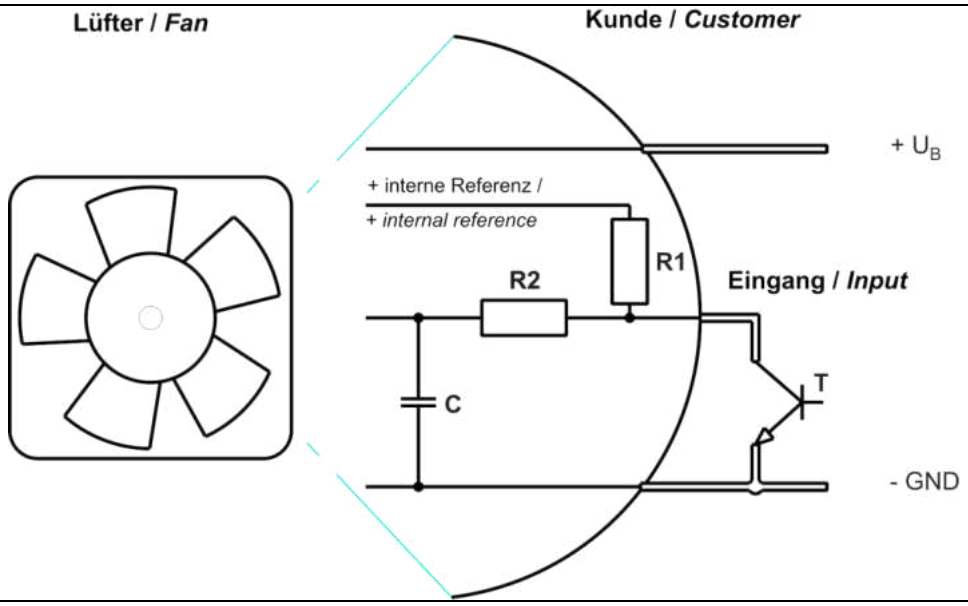

Transistor requirements:
Vce max.= >12 V; I sink max. = >5 mA
Vce sat.= <0,15 V

Speed control:
By pulse-width modulation (PWM) 0 ... 100%
Frequency = 2 kHz (1 - 10 kHz)

Information to the curve PWM:

0% - <7% PWM:	0 1/min
7% PWM:	800 1/min (Fan on, comming from 0% PWM)
7% - 10% PWM:	800 1/min (corresponding to min. speed)
10% - 90% PWM:	linear increasing curve
90% - 100% PWM:	4.800 1/min (corresponding to max. speed)
7% - >5% PWM:	linear decreasing curve (comming from 100% PWM)
5% PWM:	600 1/min or 0 1/min (Fan off, comming from 100% PWM)

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified).
In the intake and outlet area should not be any solid obstruction within 0,5 m.

Measurement setup:	Measured between two steel plates
Steel plate:	195 mm x 195 mm
Intake nozzle:	D: 125,5 mm; R: 10 mm
Distance between bottom and top plate:	80 mm
Overlapping impeller / nozzle:	2 mm


$\Delta p = 0$: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Name	**Condition**		
PWM 0001	PWM: 100 %; f: 2 kHz		


Features	**Condition**	**Symbol**	**Values**		
Voltage range		U	36 V		72 V
Nominal voltage		U_N		48 V	
Power consumption Tolerance	$\Delta p = 0$ PWM 0010	P	64,8 W +- 10 %	106 W +- 10 %	110 W +- 10 %
Current consumption Tolerance	$\Delta p = 0$ PWM0010	I	1.800 mA +- 10 %	2.200 mA +- 10 %	1.530 mA +- 10 %
Speed Tolerance	$\Delta p = 0$ PWM 0010	n	4.000 1/min +- 10 %	4.800 1/min +- 5 %	4.800 1/min +- 5 %

3.3 Operating Data - Electrical Interface - Output

Tacho type	/2 (open collector)

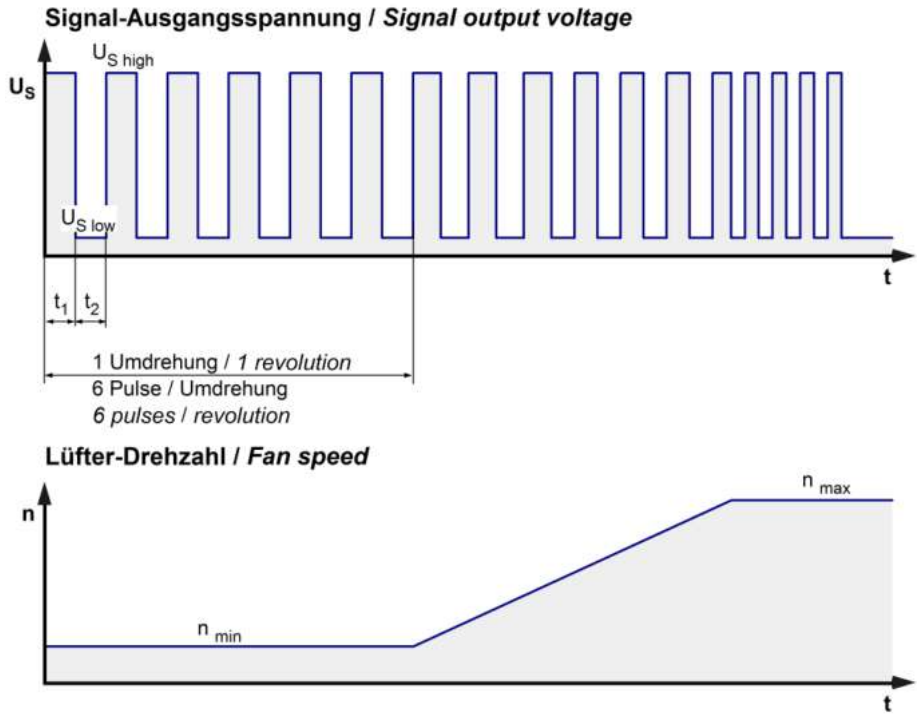

$$Ra = \frac{U_{BS} - U_{S\,low}}{I_{sink}}$$

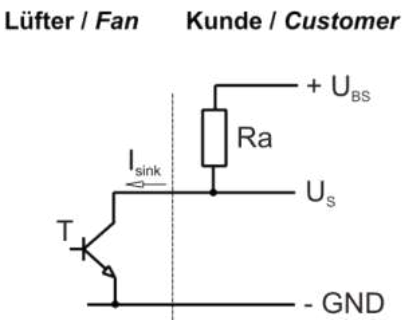


Features	Note	Values
Tacho operating voltage (UBS)		<= 60,0 V
Tacho signal Low	I sink: 2 mA	<= 0,4 V
Tacho signal High	I source: 0 mA	<= 60,0 V
Maximum sink current		<= 20 mA
External resistor	External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency	(6 x n) / 60	480 Hz
Tacho isolated from motor	No	
Slew rate		=> 0,5 V/us

Please note:
At zero speed the tacho signal is at a static HIGH. It will be also HIGH when the fan is still spinning, but the speed control signal is set to zero speed already.
The tacho signal is only activated after the start-up is completed.

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at U_N	P-CH FET I_F <= 5 mA	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 2.000 mA	
Clock signal at locked rotor	t_3 / t_4 Typical: 7 s / 10,0 s	

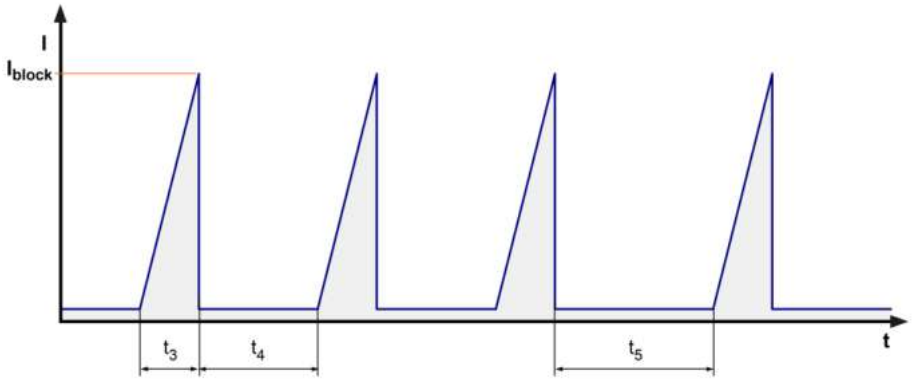

Locked rotor signal t5:

After 4 failed start-ups there is an extended timeout of 40,0s.

3.5 Data According ErP Directive

Installation / Efficency category	A / static
Speed control	integrated
Specific ratio	1,00046
Target overall efficiency 2015	43,0 %
Overall efficiency	49,2 %
Efficiency grade	62
Power input	154,3 W
Speed	4.730 1/min

All values measured in optimum energy efficiency point.

Productiondatecode is printed on the fan label.

3.6 Aerodynamics


Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

Measurement setup:	Measured between two steel plates
Steel plate:	195 mm x 195 mm
Intake nozzle:	D: 125,5 mm; R: 10 mm
Distance between bottom and top plate:	80 mm
Overlapping impeller / nozzle:	2 mm

a.) Operation condition:

4.800 1/min at free air flow	PWM 100 %; f: 2 kHz		

Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)	865,0 m3/h	
Max. static pressure (Δp = max. / $\dot{V}$ =0)	795 Pa	

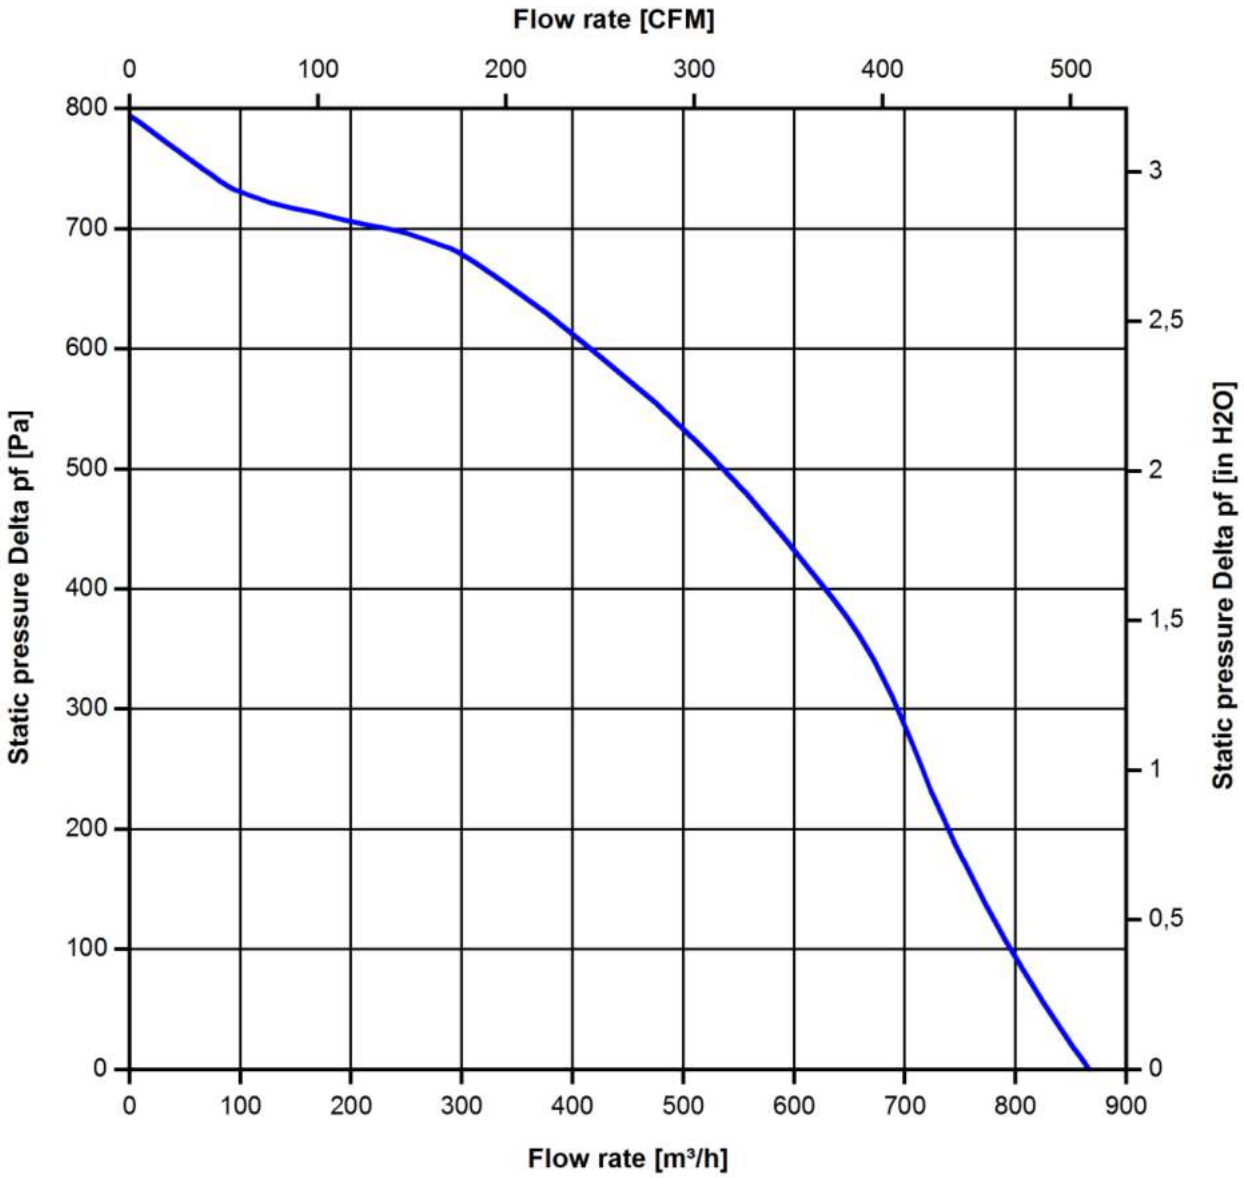
Flow rate [CFM]
0
100
200
300
400
500
800
700
600
500
400
300
200
100
0
Static pressure Delta pf [Pa]
3
2,5
2
1,5
1
0,5
0
Static pressure Delta pf [in H2O]
0
100
200
300
400
500
600
700
800
900
Flow rate [m³/h]

3.7 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

4.800 1/min at free air flow	PWM 100 %; f: 2 kHz	PWM min.: ; f:	PWM max.:; f:

Optimal operating point	660 m3/h @ 330 Pa	
Sound power level at the optimal operating point	8,1 bel(A)	
Sound pressure level at free air flow, measured in rubber bands		

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

*) Permittet application area:
The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)
There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	1000 VAC / 1 Min. 1000 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	I	


5.2 Approval Tests


CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / CSA audited by UL according to C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors


6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	70.000 h	
Life expectancy L10 at TU max.	40.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	117.500 h	

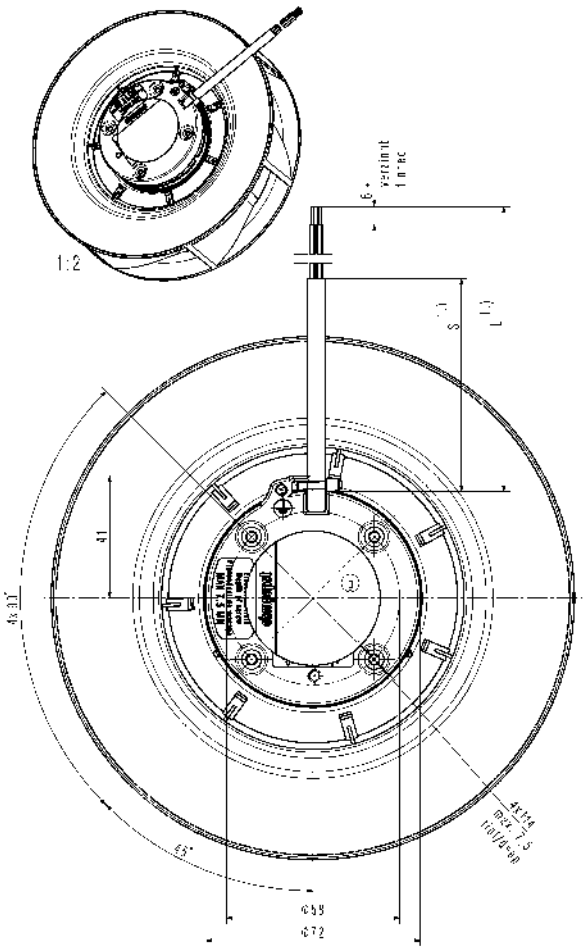

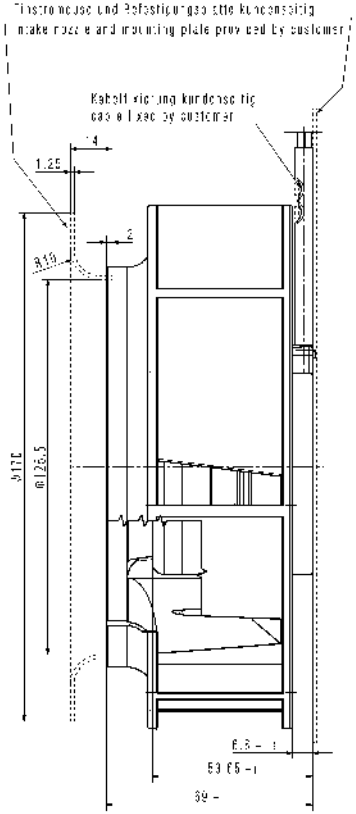

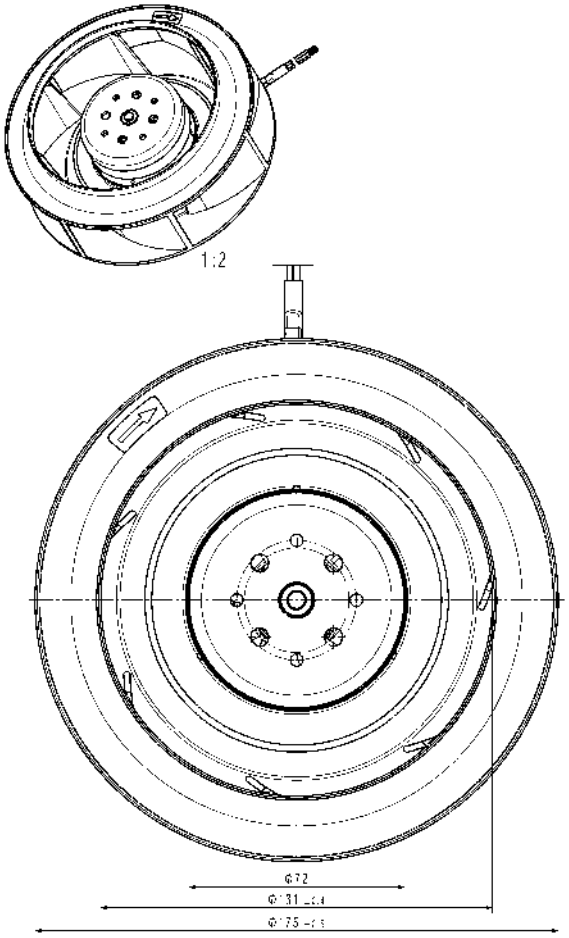

1.) Anzahl und Länge der Litzen sowie Länge des Schlauches ab Flanschrand siehe Produktspezifikation

- Axiallagerlager mit federbelasteter Vorspannung

1.) Length and number of wires and length of tube from flange edge see design specification

ball bearing without axial clearance by a pre-loaded spring.

Diese Zeichnung ist urheberrechtlich geschützt. Sie darf ohne unsere ausdrückliche Genehmigung weder vervielfältigt noch Dritten zugänglich gemacht werden.
This drawing is protected by copyright. It may not be reproduced or made available to third parties without our express permission.