R1G250-RC75-02

EC centrifugal fan

backward curved, single inlet



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

Type	**R1G250-RC75-02**	
Motor	**M1G074-CF**	
Nominal voltage	VDC	24
Nominal voltage range	VDC	16 .. 28
Type of data definition		fa
State		prelim.
Speed (rpm)	min^{-1}	2550
Power input	W	130
Current draw	A	7.1
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	56.3	42.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		76.1	62
05 Variable speed drive		Yes	

09 Power input P_e	kW	0.13
09 Air flow q_v	m^3/h	805
09 Pressure increase p_{fs}	Pa	295
10 Speed (rpm) n	min^{-1}	2370
11 Specific ratio*		1.00

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

* Specific ratio = 1 + p_{fs} / 100 000 Pa

LU-164801

EC centrifugal fan

backward curved, single inlet

Technical features


Mass	1.5 kg
Size	250 mm
Surface of rotor	Galvanised
Material of electronics housing	Die-cast aluminium, coated in black
Material of impeller	PA plastic
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 24 KM; Electronics IP 66 / 69 K
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H2+
Note ambient temperature	Occasional start-up between -40°C and -25°C is permissible. For continuous operation at ambient temperatures below -25°C (e.g. refrigeration applications) we recommend our fan version with special low-temperature bearings.
Max. permissible ambient motor temp. (transp./ storage)	+70 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Tach output - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Overvoltage detection - Over-temperature protected electronics
Motor protection	Reverse polarity and locked-rotor protection
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Approval	EAC; UL 507

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

backward curved, single inlet

Product drawing

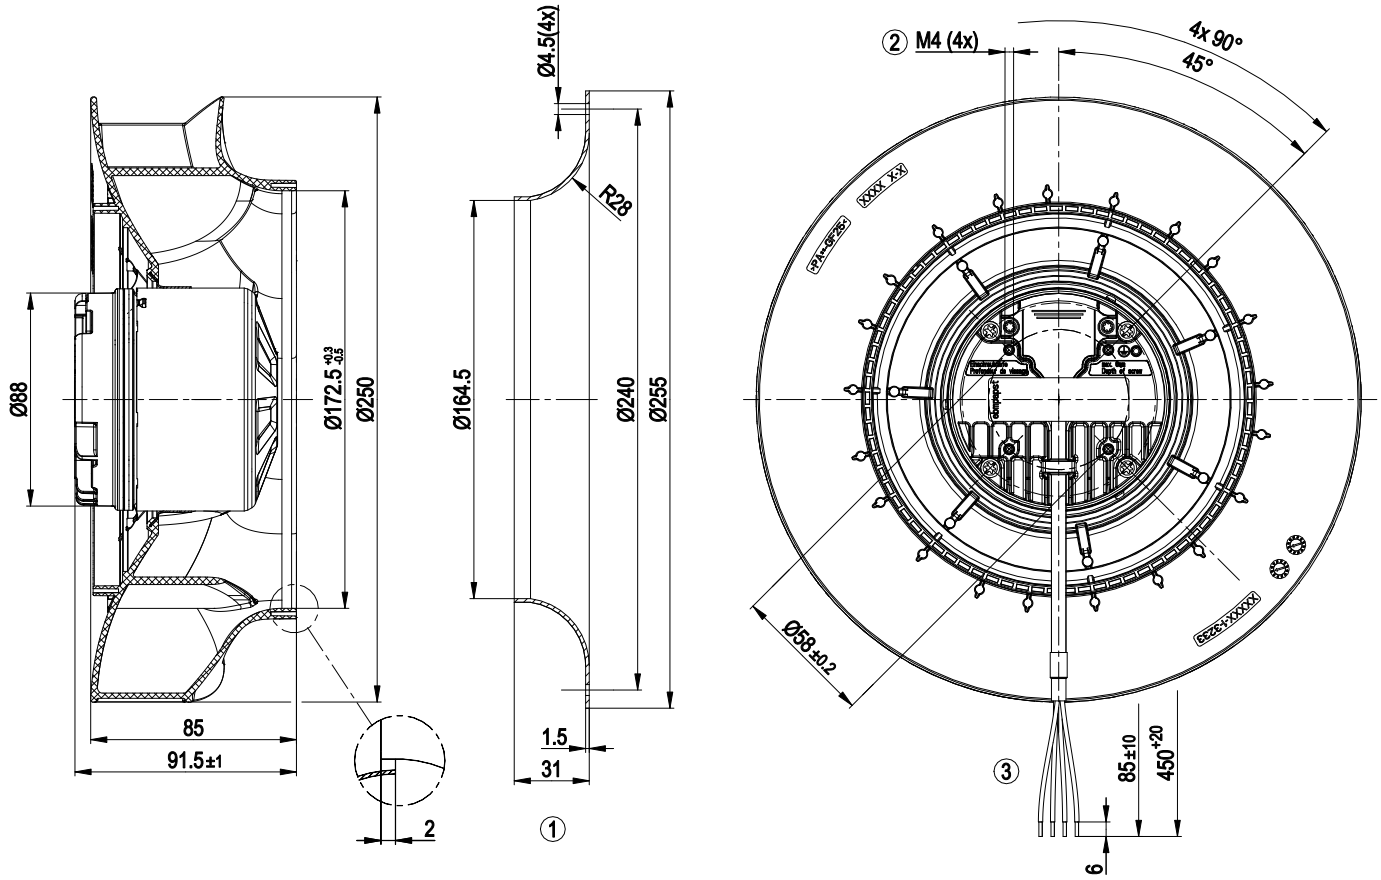


1	Accessory part: Inlet nozzle 96359-2-4013 not included in scope of delivery
2	Thread reach max. 6 mm
3	Connection line PVC 4x AWG18, insulating sleeve, 4x lead tips crimped

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

backward curved, single inlet

Connection screen

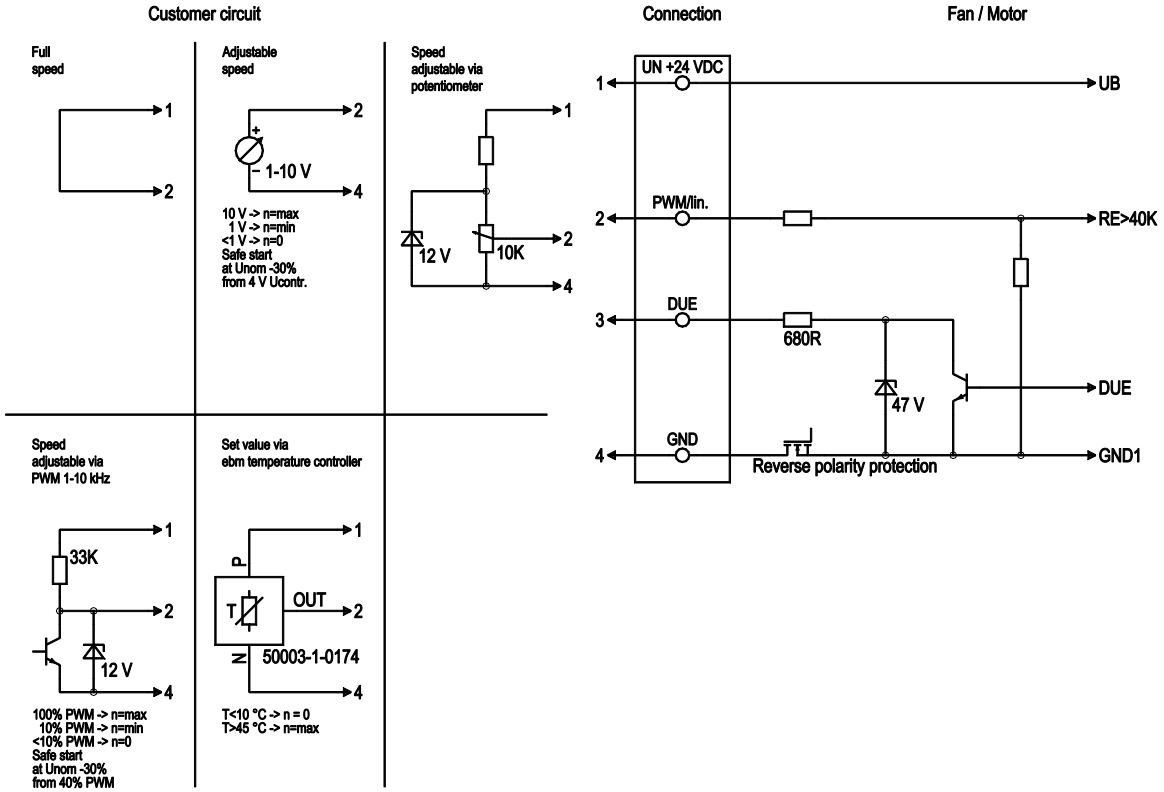


No.	Conn.	Designation	Colour	Function / assignment
	1	UN +24 VDC	red	Power supply 24 VDC, maximum ripple 3.5 %
	2	PWM/LIN	yellow	Control input Re > 40k
	3	DUE	white	Speed monitoring output, 3 pulses per revolution, Isink max = 10 mA
	4	GND	blue	Reference earth

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

backward curved, single inlet

Charts: Air flow

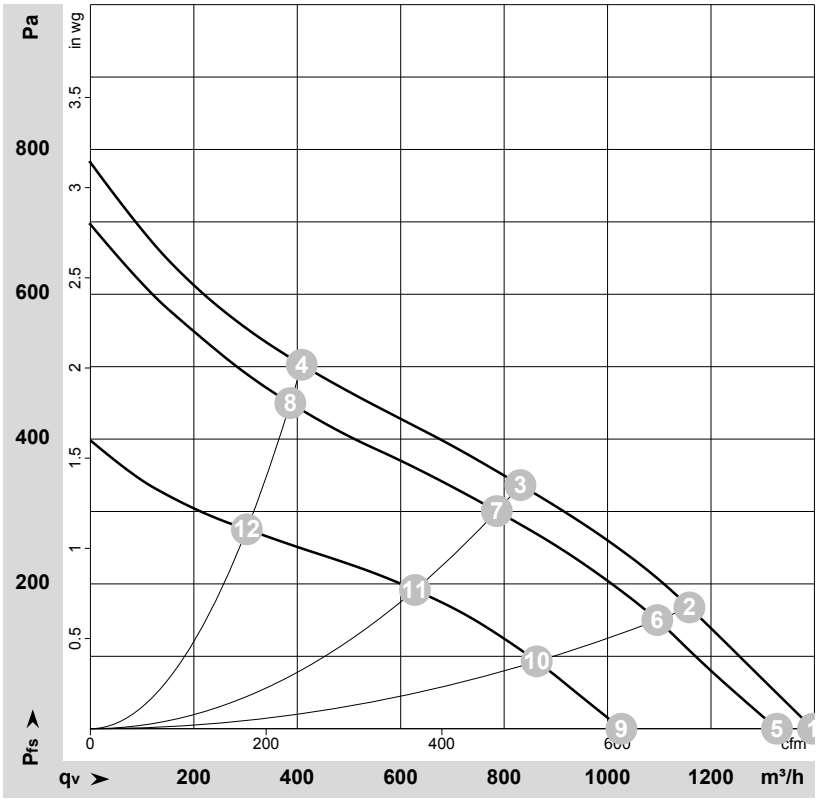

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-164866-1
Measurement: LU-164801-1
Measurement: LU-164863-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	n	P_{ed}	I	LpA_{in}	LwA_{in}	q_V	p_{fs}	q_V	p_{fs}
	V	min^{-1}	W	A	dB(A)	dB(A)	m^3/h	Pa	cfm	inH2O
1	28	2695	153	7.84			1395	0	820	0.00
2	28	2580	162	8.43			1160	168	680	0.67
3	28	2510	164	8.66			830	337	490	1.35
4	28	2655	157	8.07			410	502	240	2.02
5	24	2550	130	7.10	68	76	1325	0	780	0.00
6	24	2440	131	7.46	64	71	1095	150	645	0.60
7	24	2370	134	7.74	61	69	785	300	465	1.20
8	24	2510	129	7.22	65	73	385	450	230	1.81
9	16	1980	59	4.78			1025	0	605	0.00
10	16	1925	63	5.11			865	93	510	0.37
11	16	1895	67	5.38			630	192	370	0.77
12	16	1965	60	4.88			300	275	180	1.10

U = Supply voltage · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com