D3G146-HS05-06

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

Type	**D3G146-HS05-06**
Motor	**M3G055-CF**

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Speed	min^{-1}	1320
Power input	W	107
Current draw	A	0.9
Min. back pressure	Pa	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	+50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)

Technical features

Mass	2.5 kg
Size	146 mm
Surface of rotor	Galvanised
Material of electronics housing	PP plastic, black
Material of impeller	PP plastic, white
Housing material	PP plastic, black
Motor suspension	Motor anti-vibration mounted on both sides
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	Motor IP 54, electronic IP 20; Motor IP54
Insulation class	"F"
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Over-temperature protected motor
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	> 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)

Product drawing

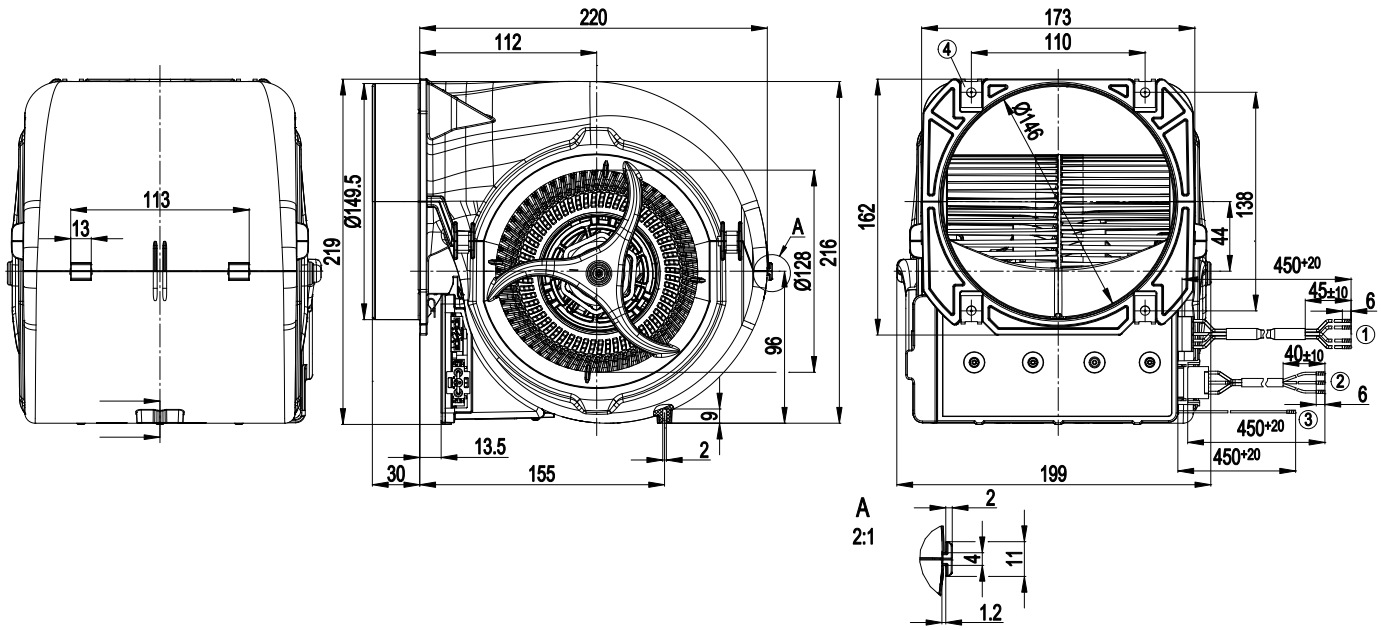

Line	No.	Signal	Colour	Function / assignment
	1			Control line AWG20, 4 x brass lead tips crimped
			red	Voltage output 10V/ 1mA
			white	Tach output
			yellow	Control input 0 - 10V or PWM
			blue	GND - Connection for control interface
	2			Connection line PVC 3 x 0.5 mm²; 3 x brass lead tips crimped
			green/yellow	Protective earth
			black	Power supply 230 VAC, 50 60 Hz, for voltage range refer to rating plate
			blue	Neutral conductor
	3		green/yellow	EMC earth, 1 x brass lead tip crimped
	4			4 x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus thickness of mounting material)


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)

Connection screen

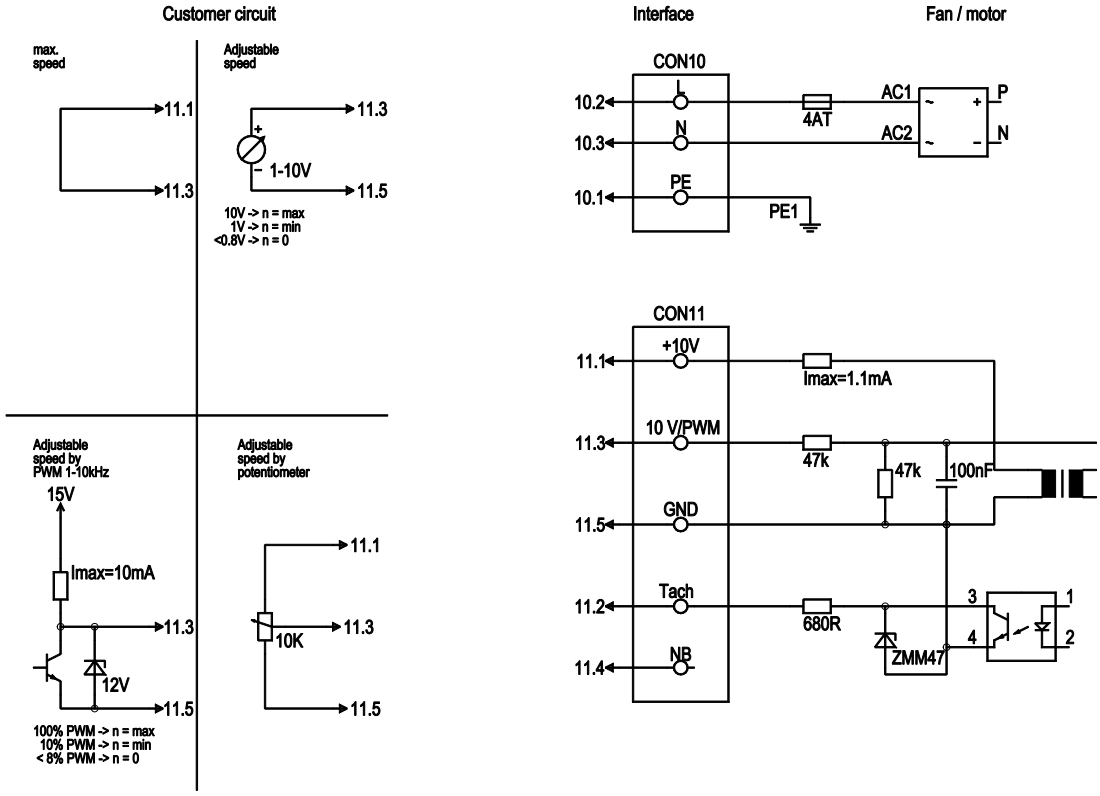

Line	No.	Signal	Colour	Function / assignment
CON10	10.1	PE	green/yellow	Protective earth
CON10	10.2	L	black	Power supply 230 VAC, 50-60 Hz, for voltage range refer to rating plate
CON10	10.3	N	blue	Neutral conductor
CON11	11.1	10 V/max. 1.1 mA	red	Voltage output 10 V/ 1.1 mA, electrically isolated
CON11	11.2	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated
CON11	11.3	0-10 V PWM	yellow	Control input 0 - 10 V or PWM, electrically isolated
CON11	11.4	NB		Not assigned
CON11	11.5	GND	blue	GND - Connection for control interface


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan

forward curved, dual inlet

with housing (large flange)

Charts: Air flow 50 Hz

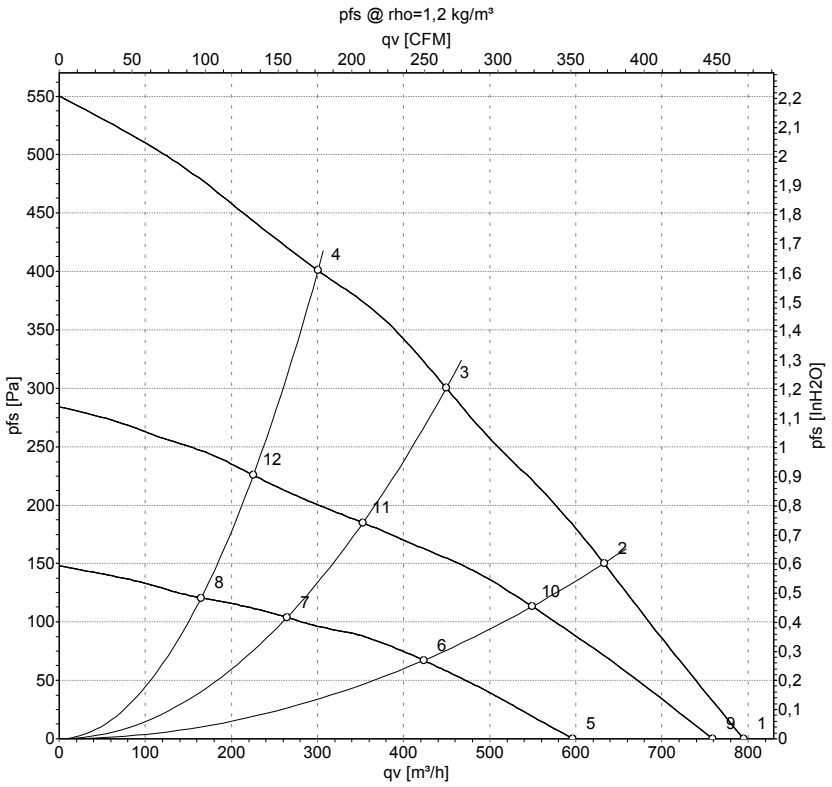

Measurement: LU-135250
Measurement: LU-131828
Measurement: LU-131827

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P_{ed}	I	qv	p_{fs}
	V	Hz	min^{-1}	W	A	m^3/h	Pa
1	230	50	1320	107	0.90	795	0
2	230	50	1730	107	0.90	635	150
3	230	50	2200	107	0.90	450	300
4	230	50	2525	97	0.80	300	400
5	230	50	1000	41	0.38	595	0
6	230	50	1170	30	0.29	425	67
7	230	50	1320	23	0.23	265	104
8	230	50	1420	18	0.19	165	120
9	230	50	1255	84	0.70	760	0
10	230	50	1505	67	0.58	550	113
11	230	50	1745	50	0.45	355	185
12	230	50	1910	42	0.39	225	226

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com