
Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN ISO 16016 beachten

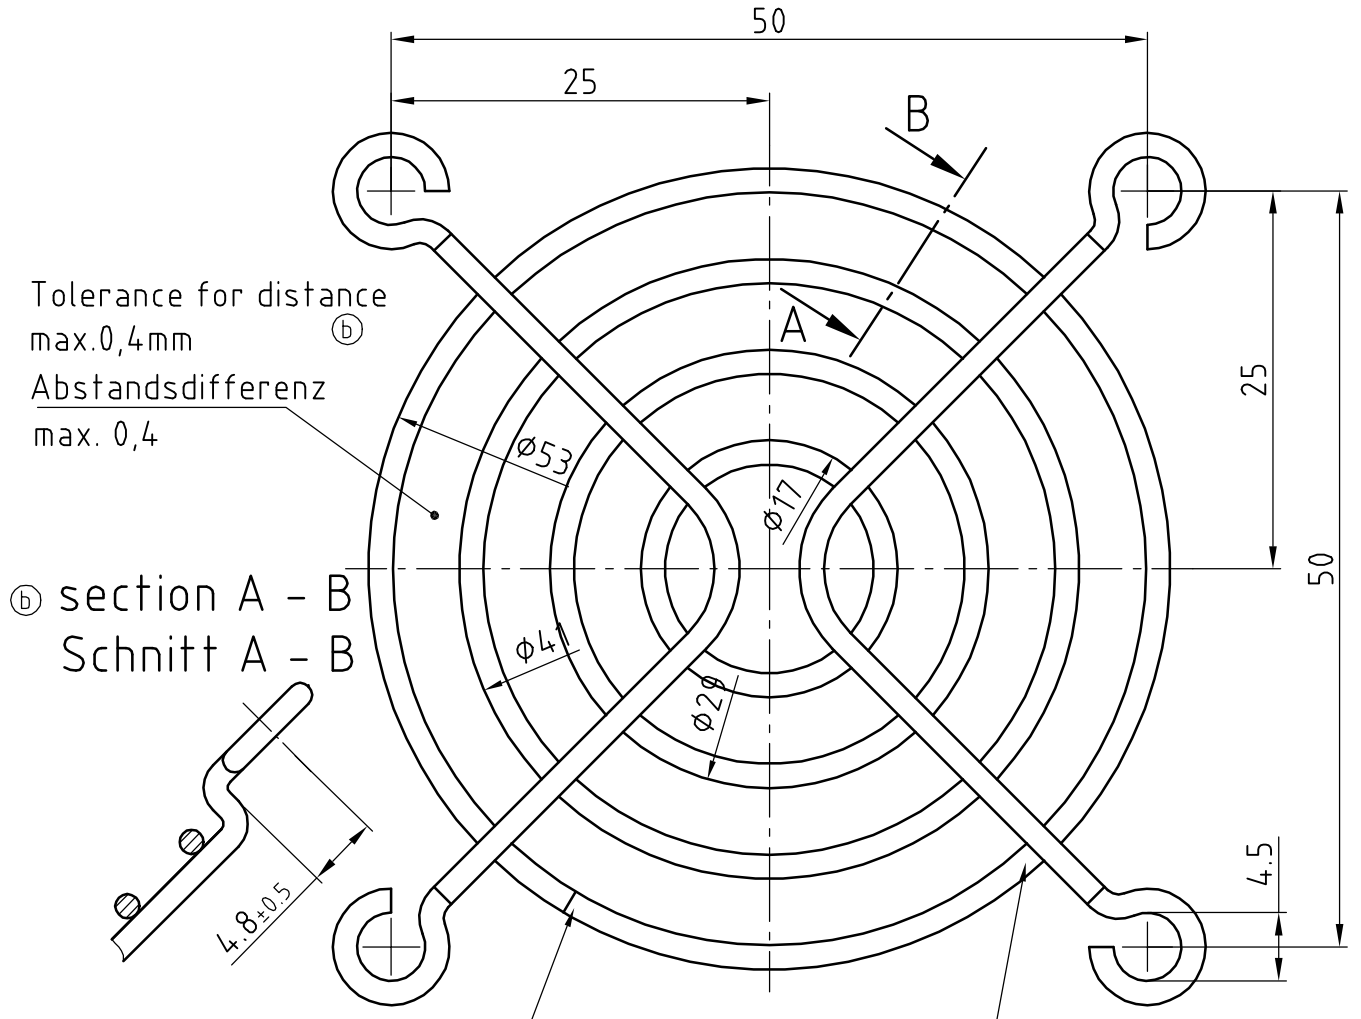


Schweißstoßstellen stirnseitig
möglichst aneinander liegend
Grat max. 0,2 ; Vesatz max. 0,3

welded bump positions aligned, allowed
burr max.0,2mm allowed misalignement ⓑ
0,3mm

punktgeschweißt
Zugfestigkeit 1000N

spot welded ⓑ
tensile strength 1000N

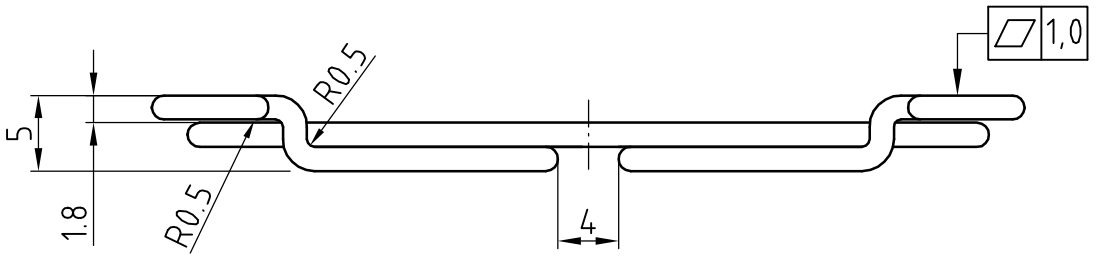

ⓑ

Tolerierung: Toleration: DIN 7167 Allgemeintoleranzen: measure of linear and angular dimensions and general tolerances: tolerances for features	Längenmaße: Winkel, Form u. Lage: DIN ISO 2768-mK	Werkstoff: Stahldraht ø1,6 ⓐ DIN EN 10218-2 Oberfläche: glänzend 6µm vercromt	material: steel wire ø1,6 ⓑ DIN EN 10218-2 surface: bright 6µm chrome plated

AutoCAD		Artikel: Schutzgitter LZ28 guard grille LZ28 ⓑ	Maßstab: 2:1
	Datum: 08.09.2005 / Name: KOLETZKI		
Bearbeitet			
	B: 000000103562 / Index: Aend.-Nr.	Zchg.-Nr.: 9920028000	Blatt: 001
Geprueft u. zur Verwendung freigegeben von KOLETZKI am 08.09.2005	PAPST-MOTOREN GmbH & Co KG D-78112 St.Georgen Germany	Ers.f.Zchg.: GL. NR. V. 07.02.85	A4

Vertraulich / Confidential Information 30.01.2007