Product Data Sheet | 4118 N/2H8P-006



The engineer's choice

ebmpapst

4118 N/2H8P-006

INDEX

1 General 3

2 Mechanics 3

2.1 General 3
2.2 Connections 3

3 Operating Data 4

3.1 Operating Data - Electrical Interface - Input 4
3.2 Electrical Operating Data 5
3.3 Operating Data - Electrical Interface -Output 6
3.4 Electrical Features 7
3.5 Data according ErP directive 9
3.6 Aerodynamic 10
3.7 Sound Data 11

4 Environment 11

4.1 General 11
4.2 Climatic requirements*) 11

5 Safety 12

5.1 Electrical Safety 12
5.2 Approval Tests 12

6 Reliability 12

6.1 General 12

1 General

Fan type	Fan	
Rotational direction looking at rotor	clockwise	
Airflow direction	Air intake over struts	
Bearing system	Ball bearing	
Mounting position	any	

2 Mechanics


2.1 General

Width	119,0 mm	
Height	119,0 mm	
Depth	38,0 mm	
Weight	0,425 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges Screw size	wire outlet corner: 420 Ncm remaining corners: 600 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires		
Length of lead wire Tolerance	L = 500 mm +- 10,0 mm		
Wire gauge (AWG)	20	22	
Insulation diameter	1,70 mm	2,05 mm	
Contact	see drawing		



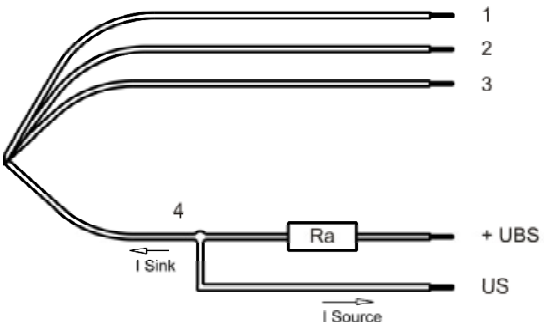

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	PWM
Wire 4	white	Tacho

The auxilliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.



Lead wire 1 - 2: AWG20 (Insulation diameter 2,05mm)
Lead wire 3 - 4: AWG22

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	PWM

Features

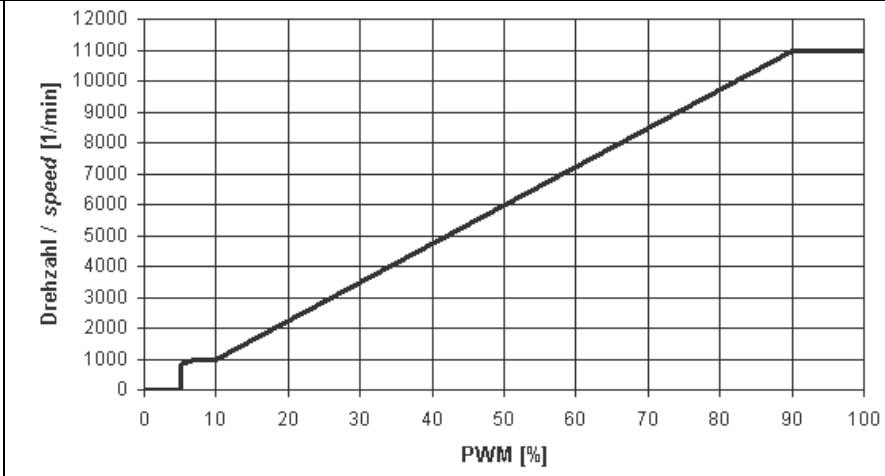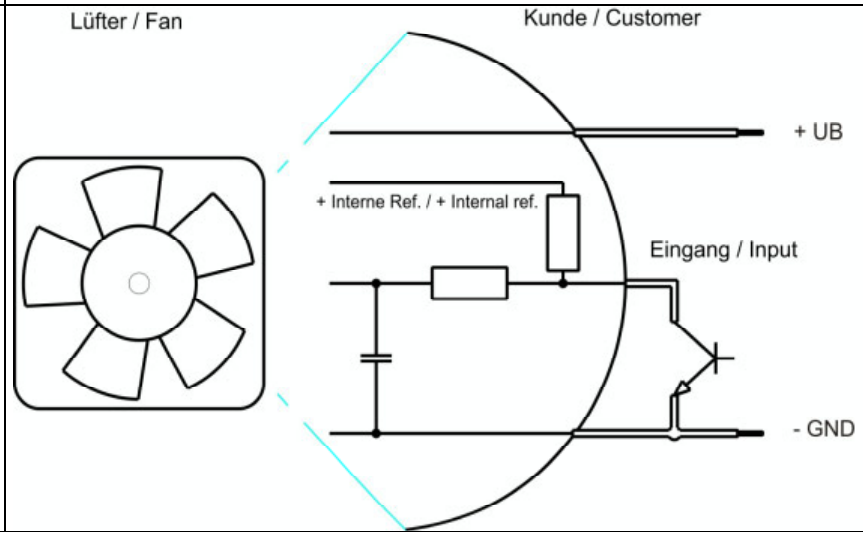Inpute type	Open collector	
PWM - Frequency		1 kHz - 20 kHz Typical: 2 kHz
Characteristics		
Schematics		

Speed control:
PWM = 0... 100 %; f = 1... 20 kHz; n = 1000... 11.000 1/min.

Its possible to run the fan by a control voltage of 0... 5 V. (5 V corresponding 100 % PWM).

Please note:
The power supply must be able to "sink" and work together with an internal pull-up resistor (10 kOhm).

3.2 Electrical Operating Data

Measurement conditions:	Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal;warm-up time before measuring 5 minutes (unless otherwise specified).In the intake and outlet area should not be any solid obstruction within 0,5 m.

Δp = 0: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Name	Condition		
PWM 0001	PWM: 95 %; f: 2 kHz		

Features	Condition	Symbol	Values		
Voltage range	Δp = 0	U	36,0 V		72,0 V
Nominal voltage	Δp = 0	U_N		48,0 V	
Power consumption Tolerance	Δp = 0 PWM 0001	P	72,0 W +- 10,0 %	125,0 W +- 10,0 %	130,0 W +- 10,0 %
Current consumption Tolerance	Δp = 0 PWM 0001	I	2.000 mA +- 10,0 %	2.600 mA +- 10,0 %	1.800 mA +- 10,0 %
Speed Tolerance	Δp = 0 PWM 0001	n	9.150 1/min +- 7,5 %	11.000 1/min +- 5,0 %	11.000 1/min +- 5,0 %

Please note:
The inrush current depends on the cpacitor and resistance of the lead wire. By using an external capaitor the inrush current rises.
Built into the fan is an additional under- and overvoltage control, which switches the power stage and the fan off if the following conditions are reached.
At U < 28 V and / or U > 78 V is n= 0 1/min

Starting:

At U: > 30 V
or U < 76 V
is n > 0 1/min


Name	Condition		
PWM 0002	PWM: 9 %; f: 2 kHz		

Features	Condition	Symbol	Values		
Voltage range	Δp = 0	U	36,0 V		72,0 V
Nominal voltage	Δp = 0	U_N		48,0 V	
Power consumption Tolerance	Δp = 0 PWM 0002	P	1,2 W +- 20,0 %	1,6 W +- 20,0 %	2,7 W +- 20,0 %
Current consumption Tolerance	Δp = 0 PWM 0002	I	35 mA +- 20,0 %	33 mA +- 20,0 %	37 mA +- 20,0 %
Speed Tolerance	Δp = 0 PWM 0002	n	1.000 1/min +- 7,5 %	1.000 1/min +- 7,5 %	1.200 1/min +- 12,5 %

3.3 Operating Data - Electrical Interface -Output

Tacho type	/2 (Open collector)

Signal-Ausgangsspannung / *Signal output voltage*

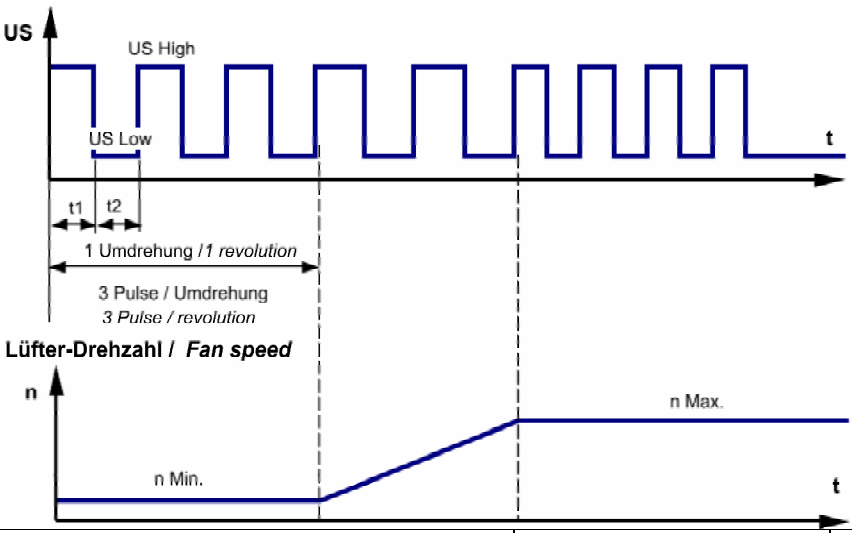

$$Ra = \frac{UBS - US\ Low}{I\ Sink}$$

Features	Note	Values
Tacho operating voltage (UBS)		<= 60,0 V
Tacho signal Low	I sink: 2 mA	<= 0,4 V
Tacho signal High	I source: 0 mA	<= 60,0 V
Maximum sink current		<= 20 mA
External resistor	External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency	(3 x n) / 60	
Tacho isolated from motor	No	
Slew rate		=> 0,5 V/us


Note to the tacho frequency: 3 Pulse per revolution!

When the fan start up or the rotor is locked the tacho is off. When the fan works normaly the tacho signal output switch on.

Alarm type	None

3.4 Electrical Features


Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at Un	N-CH FET IF <= 1 mA	
Locked rotor protection	Auto restart	
Locked rotor current at Un	approx. 1.200 mA	
Clock signal t3/t4 at locked rotor	Typical: 3,1 s / 5,2 s t3: 3,3 s... 3,5 s t4: 5,0 s... 5,4 s	

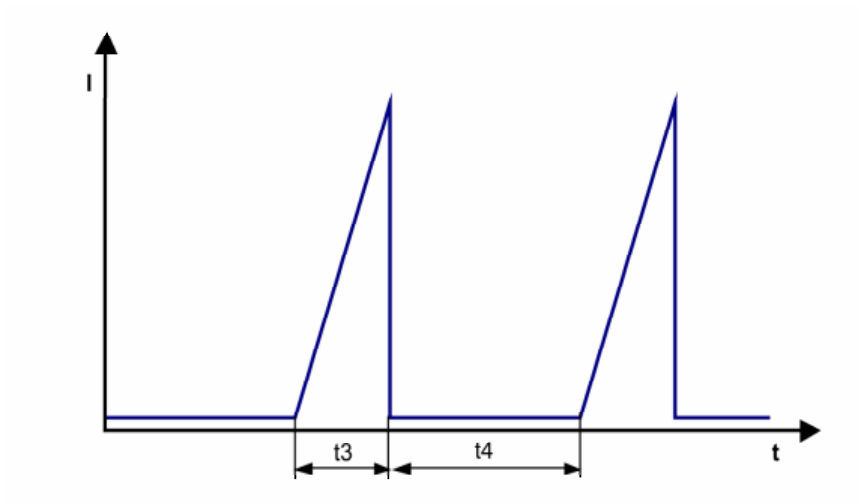


After 5 failed start-ups there is an extended timeout of 30 s.

When several fans are operated together (in a fan tray) and one fan starts after the other and the starting current is eventually limited, it can happen that the not yet operated fan is driven in reverse by the counter pressure. This can lead to a failure of the first start-up. The fan detects this and makes another start with an increased current.


The locked rotor current is denoted as peak-current at nominal voltage.

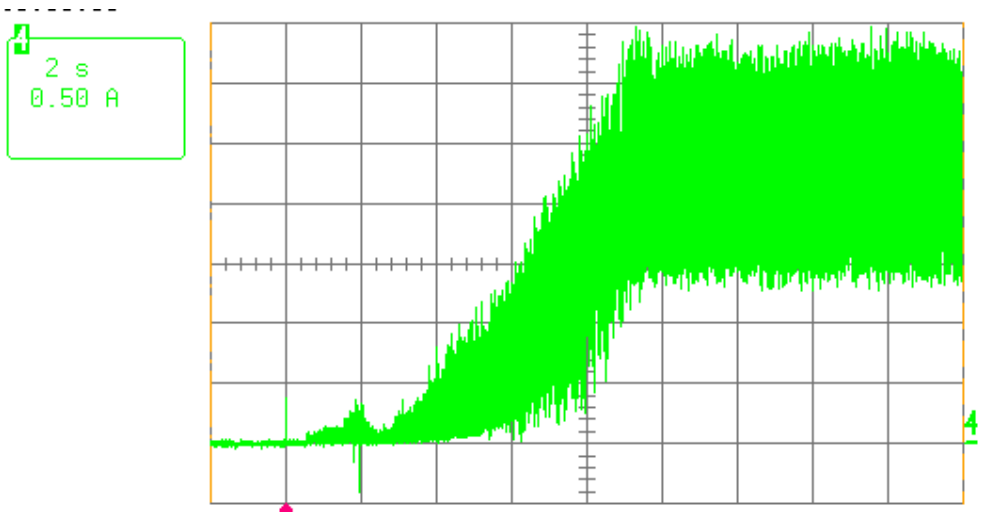


Start-up current at 48,0 V; 0 - 11.000 1/min

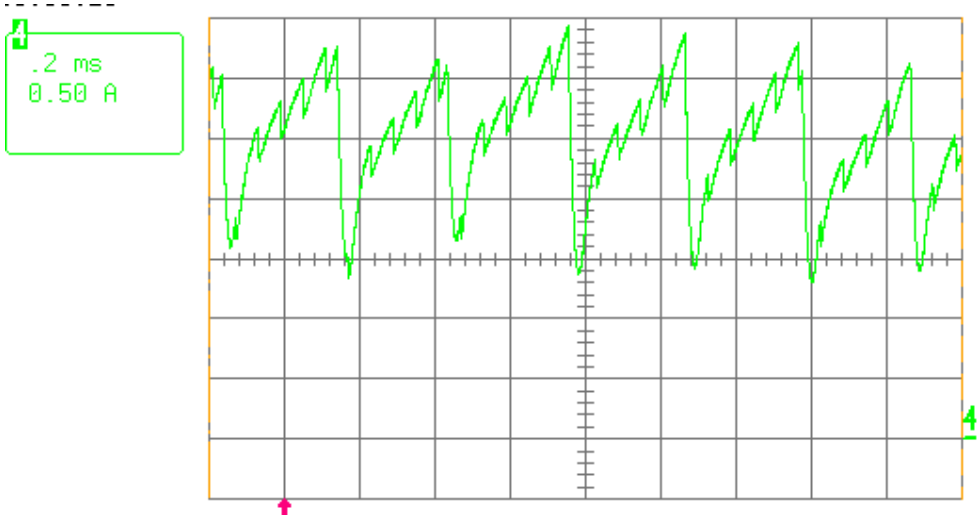


Typical running current at 48,0 V, free air; 11.000 1/min

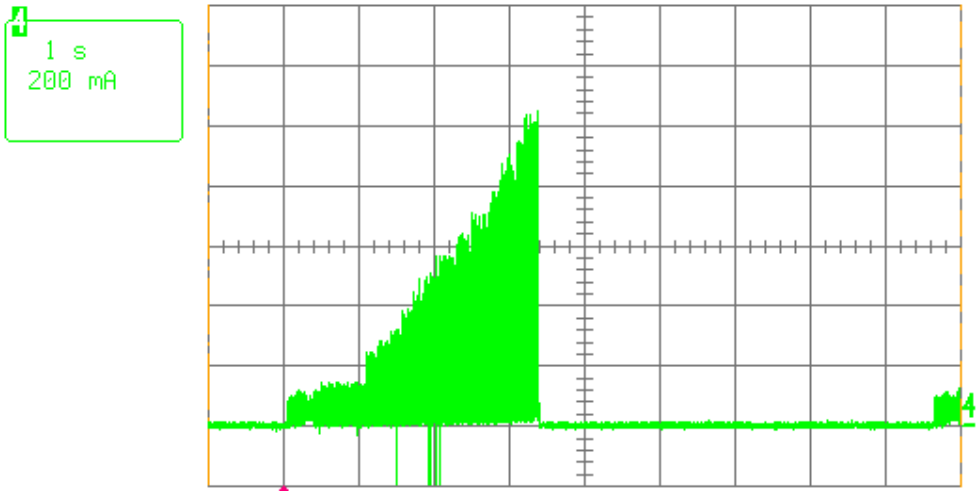

Locked rotor current at 48,0 V

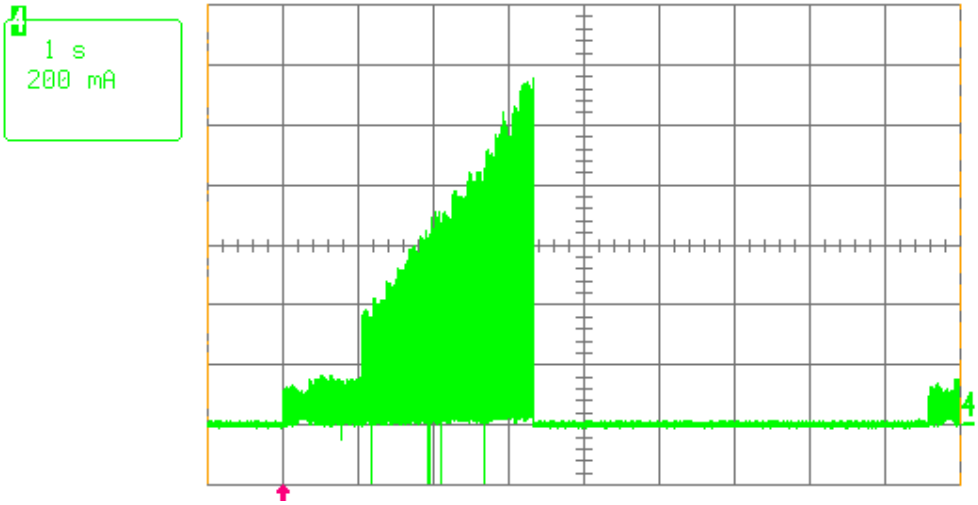

Locked rotor current at 36,0 V

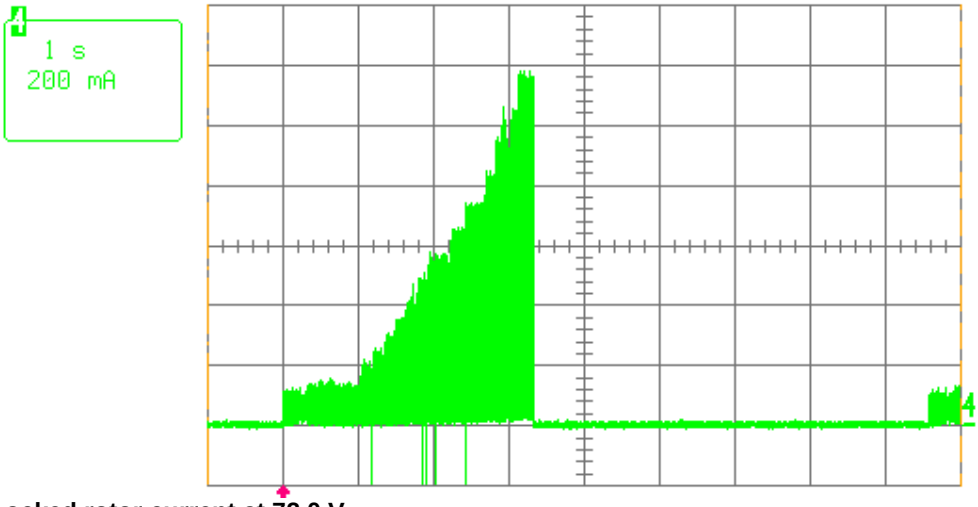

Locked rotor current at 72,0 V

3.5 Data according ErP directive

Installation / Efficency category	A / static
Speed control	integrated
Specific ratio	1,00524
Target overall efficiency 2015	28,4 %
Overall efficiency	40,1 %
Efficiency grade	40
Power input	143,7 W
Speed	11.060 1/min

All values measured in optimum energy efficiency point.


Productiondatecode is printed on the fan label.

3.6 Aerodynamic

Measurement conditions:	Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

11.000 1/min at free air flow	PWM 95 %; f: 2 kHz		
Max. free-air flow (Δp = 0 / $\dot{V}$ = max.)		565,0 m3/h	
Max. static pressure (Δp = max. / $\dot{V}$ =0)		1.490 Pa	

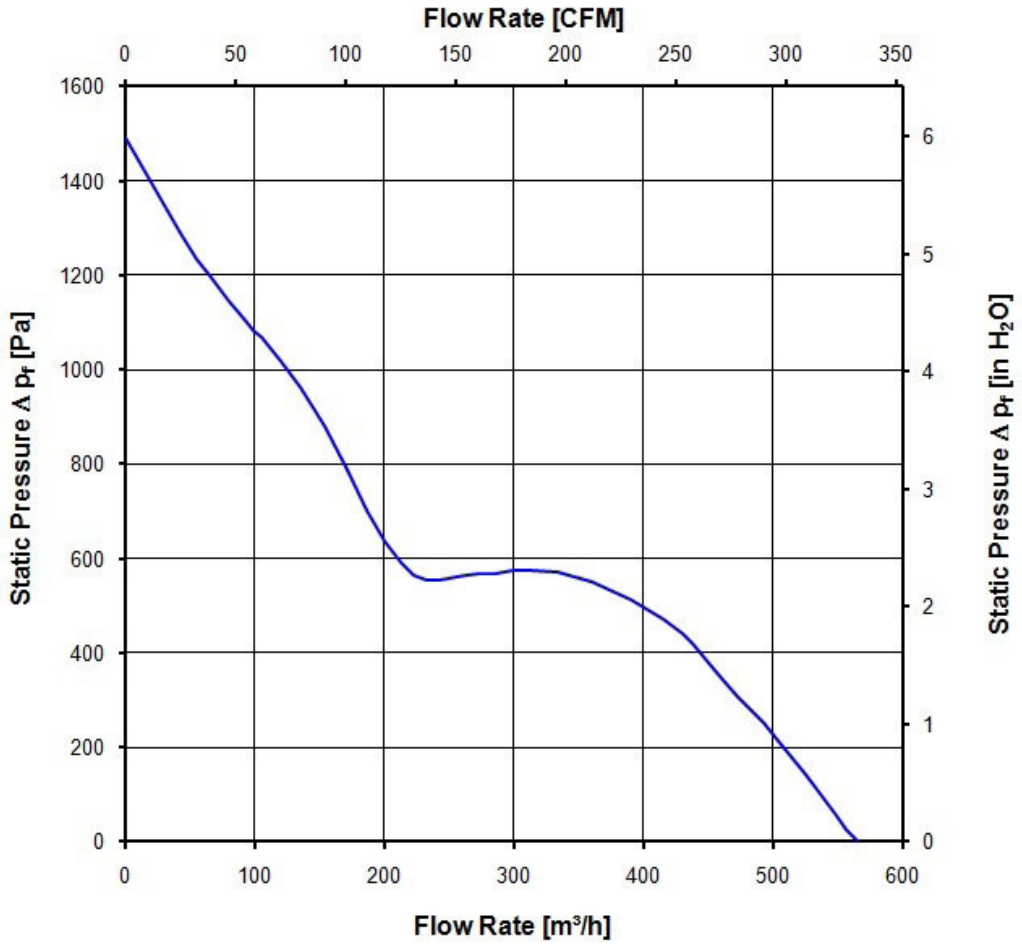

3.7 Sound Data

Measurement conditions:	Sound pressure level: 1 Meter distance between microphone and the air intake. Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A) For further measurement conditions see section 3.5

a.) Operation condition:

11.000 1/min at free air flow	PWM 95 %; f: 2 kHz	PWM min.:	PWM max.:

Optimal operating point	390,0 m3/h @ 485 Pa	
Sound power level at the optimal operating point	8,8 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	79,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	75 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

*) Permittet application area:
The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.
Pollution degree 1 (according DIN EN 60664-1)
There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.Please require severity levels and specification parameters from the responsible development departments

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	 1000 VAC / 1 Min. 1000 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	I	

5.2 Approval Tests

CE	No
UL	Yes / UL audited by CSA according to UL507, Electric Fans
VDE	Yes
CSA	Yes / C22.2 No. 113 Fans and Ventilators
CCC	Yes / GB 12350 Safety Requirements for small Power Motors

6 Reliability


6.1 General

Attention!
In order to achieve the specified life time figure, it is necessary to connect an external capacitor.

Complexity, connection, components and configuration must be checked at the project.

As a basis a capacitor of 220... 1000 uF to the supply voltage between plus and minus can be used. Max. lead length between fan and capacitor: 300 mm.

Life expectancy L10 at TU = 40 °C	55.000 h	
Life expectancy L10 at TU max.	22.500 h	
Life expectancy L10 Delta (40 °C)	110.000 h	

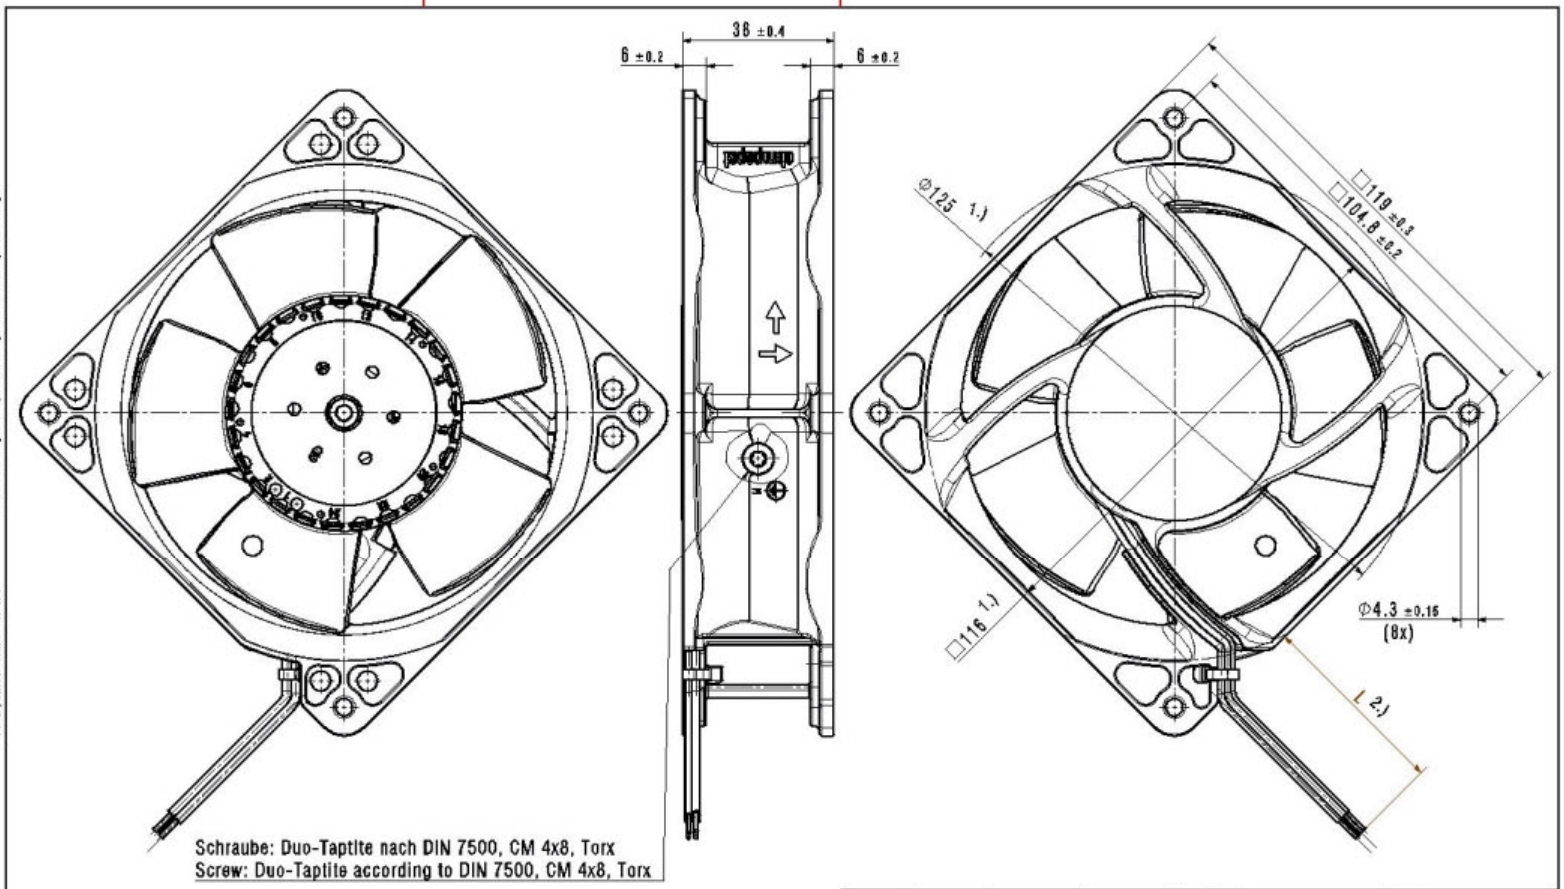

Schraube: Duo-Taptite nach DIN 7500, CM 4x8, Torx
Screw: Duo-Taptite according to DIN 7500, CM 4x8, Torx

1.) Maße für Montageausschnitt
2.) Anzahl und Länge der Litzen siehe BV - Blatt 1
- Axialspiel der Kugellager mit Feder spielfrei verspannt

1.) measures for mounting cut-out
2.) length and number of wires see design specification page 1
- ball bearing without axial clearance by a pre-loaded spring

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Reinvermerk nach ISO 2768 mittel / Standard tolerances to ISO 2768 medium
Refer to protection mark ISO 16016