

Schutzvermerk nach DIN ISO 16016 beachten/
Refer to protection notice DIN ISO 16016!

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

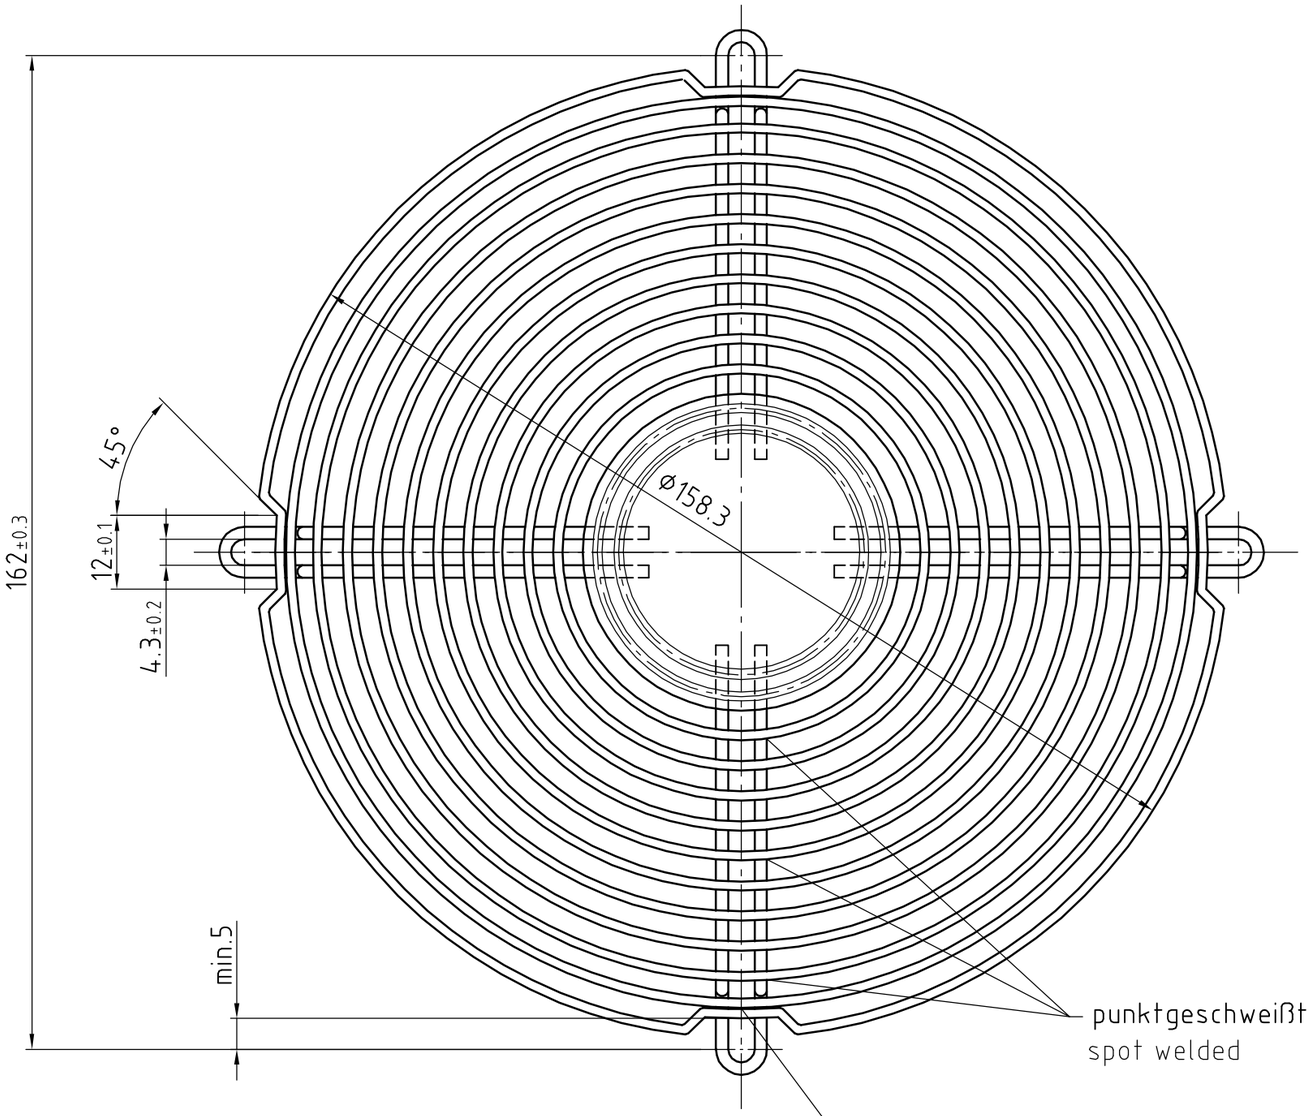

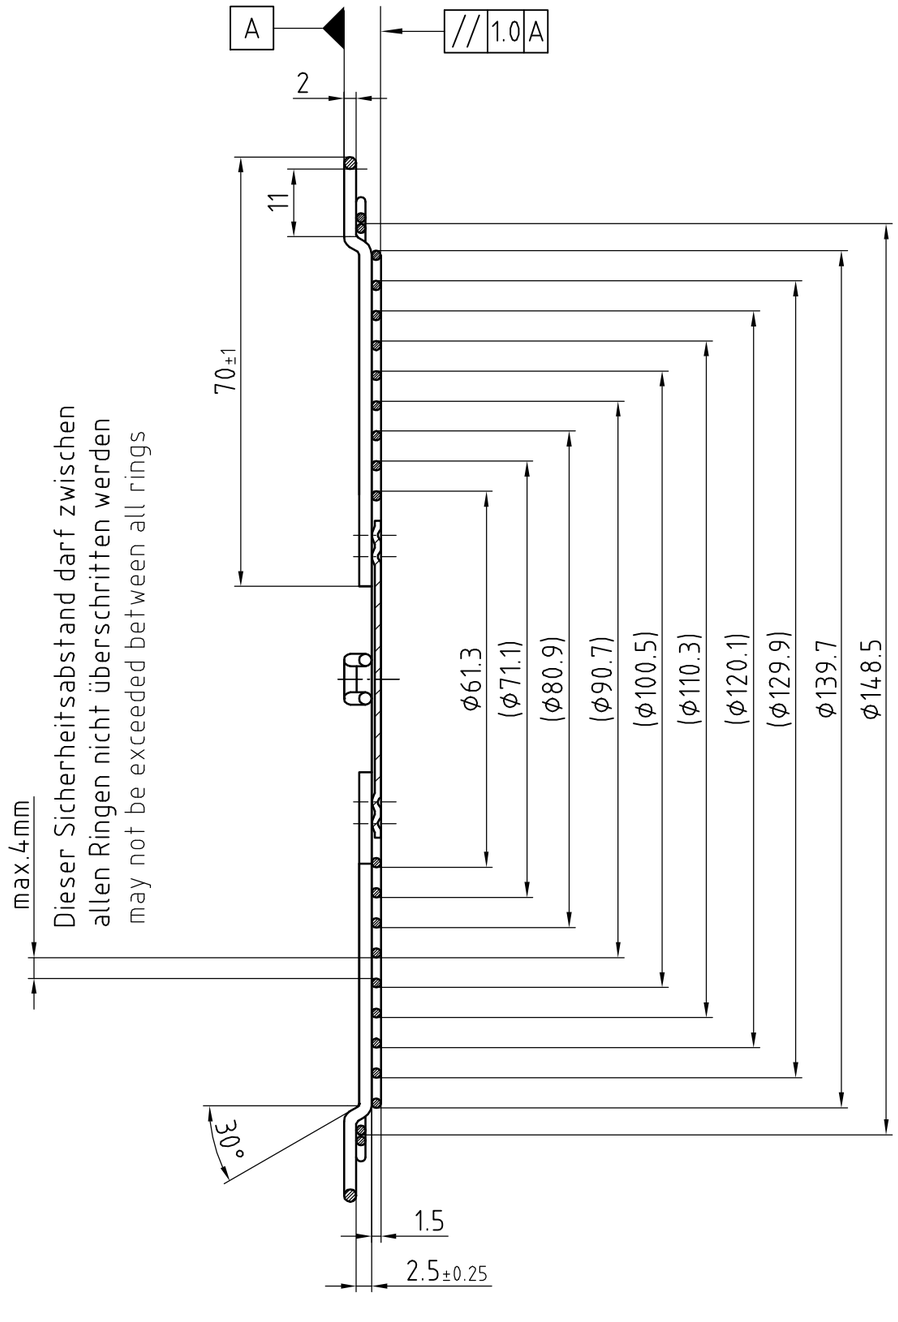

max.4mm
Dieser Sicherheitsabstand darf zwischen allen Ringen nicht überschritten werden
may not be exceeded between all rings

unbemaßte Radien R0,6
undimensioned radi R0,6

Tolerierung/Tolerances: DIN 7167 Allgemeintoleranzen/ Gen. tolerances:			Werkstoff/material: Stahldraht/steel wire DIN EN10016-1 Oberfläche: gal. glanzverzinkt blau chromatisiert Schichtstärke 8-10µm, alternativ vernickelt Schichtstärke 3µm surface: bright zincked, blue chromatised layer thickness 8-10µm, alternativ nickel-plated layer thickness 3µm	
AutoCAD 2002			Artikel/Title finger guard Schutzgitter LZ 37 accorling/nach DIN EN294	Massstab/scale 1:1
	Datum/Date	Name/Name		
Bearb./Drawn:	21.02.2002	Laufer U.		
	-		ebmpapst	Zchg.-Nr./ Dwg.-No.: 9920037000	Blatt/Page 001
	Index/Index	Aend.-Nr./Change-No.		
gepr. u. zur Verwendung freigegeben/Checked for release von/by KOLETZKI am/on 27.08.2006			ebm-papst St. Georgen GmbH & Co. KG	Ers.f.Zchg./ Replaces: 50952-2-4039 EBM	A3

Vertraulich / Confidential Information 12.02.2008