D4E146-LV19-14

AC centrifugal fan

forward curved, dual inlet

with housing (flange)



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

Type	**D4E146-LV19-14**
Motor	**M4E068-CF**

Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Type of data definition		fa	fa
Valid for approval / standard		CE	CE
Speed	min^{-1}	780	710
Power input	W	65	68
Current draw	A	0.29	0.3
Motor capacitor	µF	2	2
Capacitor voltage	VDB	400	400
Capacitor standard		P2 (CE)	P2 (CE)
Min. back pressure	Pa	0	0
Max. ambient temperature	°C	50	40
Starting current	A	0.33	0.33

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

AC centrifugal fan

forward curved, dual inlet

with housing (flange)

Technical features

Mass	2.5 kg
Size	146 mm
Surface of rotor	Uncoated
Material of terminal box	PP plastic, black
Material of impeller	Plastic PA6, fibreglass-reinforced
Housing material	Plastic, Polyfort PP-T20
Motor suspension	Motor mounted with anti-vibration on both sides
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 44
Insulation class	"F"
Humidity class	F0
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Speed steps	5
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	VDE; CCC


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

AC centrifugal fan

forward curved, dual inlet

with housing (flange)

Product drawing

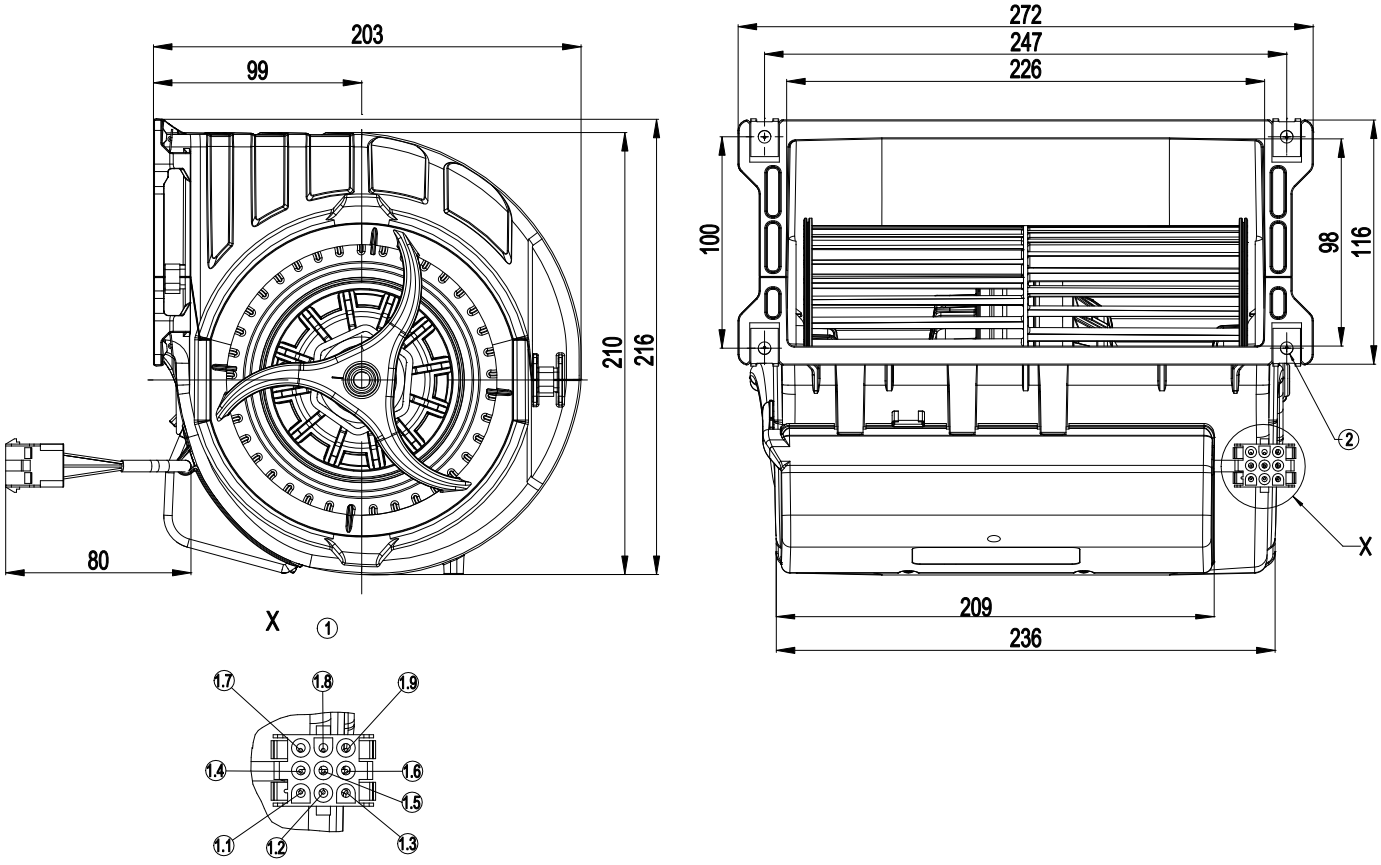

2	4x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus thickness of mounting material)
1	Connector housing AMP Universal Mate-N-Lok
1.1	Step 1 (min.)
1.2	Step 2
1.3	Step 3
1.4	Step 4
1.5	Step 5 (max.)
1.6	-
1.7	-
1.8	N
1.9	Protective earth


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

AC centrifugal fan

forward curved, dual inlet

with housing (flange)

Connection screen

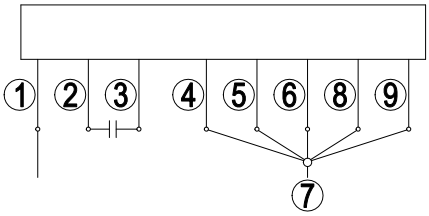

Note: Fast speed (step V); slow speed (step I)

1	= N = blue	2	brown	3	yellow
4	Step I white	5	Step II red	6	Step III grey
7	L1	8	Step IV orange	9	Step V black


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

AC centrifugal fan

forward curved, dual inlet

with housing (flange)

Charts: Air flow 50 Hz

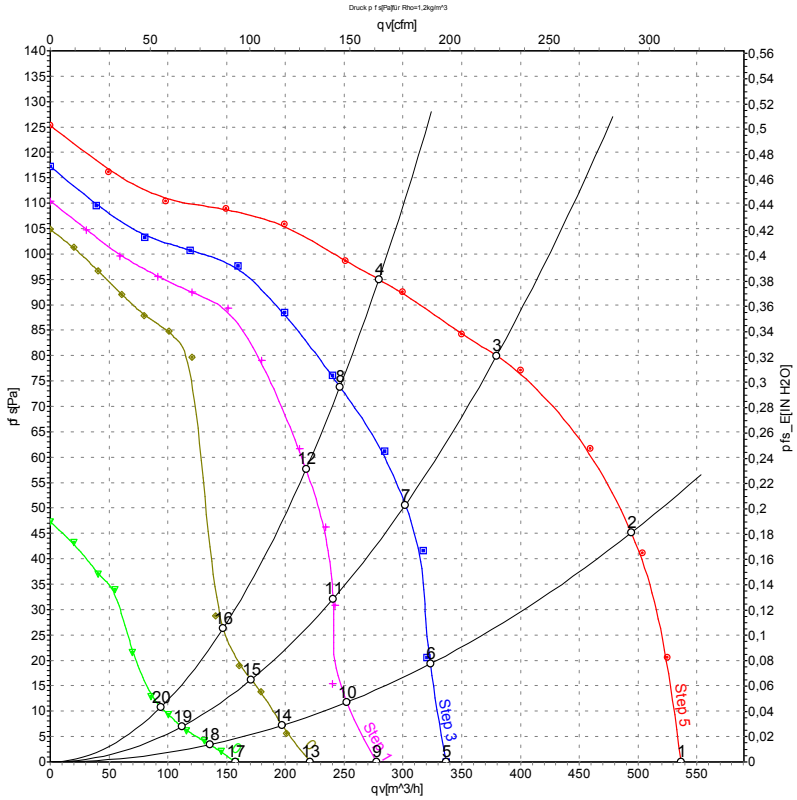

Measurement: LU-68469
Measurement: LU-68471
Measurement: LU-68472
Measurement: LU-68473
Measurement: LU-68474

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Stage	U	f	n	P_e	I	LwA_{in}	qv	p_{fs}
		V	Hz	min^{-1}	W	A	dB(A)	m^3/h	Pa
1	5	230	50	780	65	0.29	54	535	0
2	5	230	50	1075	58	0.26	56	495	45
3	5	230	50	1270	48	0.21	56	380	80
4	5	230	50	1335	44	0.20	56	280	95
5	4	230	50	495	54	0.24		335	0
6	4	230	50	685	52	0.23		325	17
7	4	230	50	1015	45	0.21		300	51
8	4	230	50	1190	40	0.19		245	74
9	3	230	50	390	50	0.22		275	0
10	3	230	50	555	48	0.22		250	10
11	3	230	50	630	48	0.22		240	15
12	3	230	50	1045	41	0.19		220	58
13	2	230	50	345	20	0.16		220	0
14	2	230	50	445	20	0.16		195	7
15	2	230	50	580	20	0.16		170	16
16	2	230	50	715	20	0.16		145	26
17	1	230	50	245	13	0.13		155	0
18	1	230	50	315	13	0.13		135	3
19	1	230	50	395	13	0.13		110	7
20	1	230	50	465	13	0.13		95	11

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LwA_{in} = Sound power level inlet side · qv = Air flow · p_{fs} = Pressure increase


ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

AC centrifugal fan

forward curved, dual inlet

with housing (flange)

Charts: Air flow 60 Hz

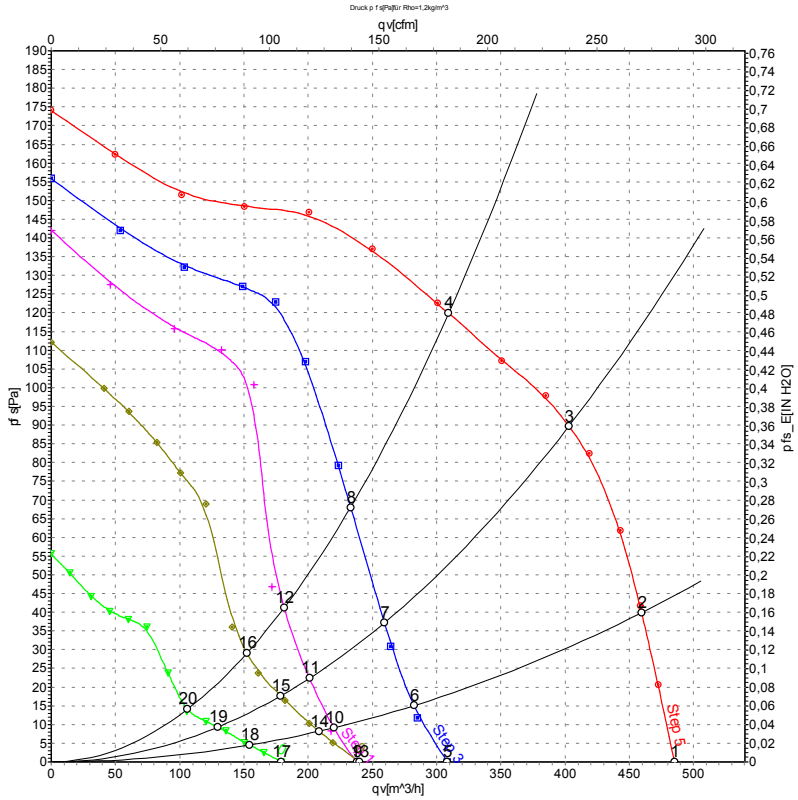

Measurement: LU-68484
Measurement: LU-68487
Measurement: LU-68490
Measurement: LU-68493
Measurement: LU-68495

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Stage	U	f	n	P_e	I	qv	p_{fs}
		V	Hz	min^{-1}	W	A	m^3/h	Pa
1	5	230	60	710	68	0.30	485	0
2	5	230	60	1010	66	0.29	460	40
3	5	230	60	1345	60	0.27	405	90
4	5	230	60	1505	54	0.25	310	120
5	4	230	60	465	52	0.24	310	0
6	4	230	60	625	51	0.24	280	14
7	4	230	60	870	50	0.24	260	37
8	4	230	60	1130	46	0.23	235	68
9	3	230	60	380	47	0.22	240	0
10	3	230	60	475	47	0.22	220	7
11	3	230	60	650	46	0.22	200	22
12	3	230	60	845	45	0.22	180	39
13	2	230	60	360	23	0.18	240	0
14	2	230	60	480	23	0.18	210	8
15	2	230	60	615	23	0.18	180	18
16	2	230	60	750	23	0.17	150	29
17	1	230	60	280	15	0.14	180	0
18	1	230	60	360	15	0.14	155	4
19	1	230	60	450	15	0.14	130	9
20	1	230	60	530	15	0.14	105	13

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com