**8300100509**

VWA0910BTTRS

# EC axial panel fan - AxiBlade

sickle-shaped blades (S series)

Fan housing with guide vanes

**ebm-papst Mulfingen GmbH & Co. KG**
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

| | |
|---|---|
| **Item** | **8300100509** |
| **Motor** | **E15037-120** |

| | | |
|---|---|---|
| Phase | | 3~ |
| Nominal voltage | VAC | 400 |
| Nominal voltage range | VAC | 380 .. 480 |
| Frequency | Hz | 50/60 |
| Method of obtaining data | | ml |
| Status | | prelim. |
| Speed (rpm) | $min^{-1}$ | 1100 |
| Power consumption | W | 3600 |
| Current draw | A | 5.2 |
| Max. back pressure | Pa | 300 |
| Max. back pressure | in. wg | 1.2 |
| Min. ambient temperature | °C | -40 |
| Max. ambient temperature | °C | 40 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

| | | Actual | Req. 2015 |
|---|---|---|---|
| 01 Overall efficiency $\eta_{es}$ | % | 56.3 | 37.2 |
| 02 Measurement category | | A | |
| 03 Efficiency category | | Static | |
| 04 Efficiency grade N | | 59.1 | 40 |
| 05 Variable speed drive | | Yes | |

| | | |
|---|---|---|
| 09 Power consumption $P_{ed}$ | kW | 3.62 |
| 09 Air flow $q_v$ | $m^3/h$ | 22750 |
| 09 Pressure increase $p_{fs}$ | Pa | 309 |
| 10 Speed (rpm) n | $min^{-1}$ | 1105 |
| 11 Specific ratio* | | 1.00 |

Data obtained at optimum efficiency level.

* Specific ratio = 1 + $p_{fs}$ / 100 000 Pa

LU-220279

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

**8300100509**

VWA0910BTTRS

# EC axial panel fan - AxiBlade

sickle-shaped blades (S series)

Fan housing with guide vanes

## Technical description

| | |
|---|---|
| **Weight** | 59.8 kg |
| **Size** | 910 mm |
| **Motor size** | 150 |
| **Rotor surface** | Painted black |
| **Electronics housing material** | Die-cast aluminum, painted gray |
| **Impeller material** | PP plastic |
| **Fan housing material** | Sheet steel, galvanized and coated with black plastic (RAL 9005) |
| **Material guide vanes** | PP plastic |
| **Guard grille material** | Steel, coated with black plastic (RAL 9005) |
| **Internal diffuser material including cover** | PP plastic |
| **Number of blades** | 5 |
| **Blade pitch** | 0° |
| **Airflow direction** | V |
| **Direction of rotation** | Clockwise, viewed toward rotor |
| **Degree of protection** | IP55 |
| **Insulation class** | "F" |
| **Moisture (F) / Environmental (H) protection class** | H2 |
| **Ambient temperature note** | Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings. |
| **Max. permitted ambient temp. for motor (transport/storage)** | +80 °C |
| **Min. permitted ambient temp. for motor (transport/storage)** | -40 °C |
| **Installation position** | Shaft horizontal or rotor on bottom; rotor on top on request |
| **Condensation drainage holes** | On rotor side |
| **Mode** | S1 |
| **Motor bearing** | Ball bearing; (sealed) |
| **Technical features** | - Operation and alarm display with LED<br>- External 15-50 VDC input (parameterization)<br>- Alarm relay<br>- Integrated PI controller<br>- Configurable inputs/outputs (I/O)<br>- MODBUS V6.4<br>- Motor current limitation<br>- PFC, active<br>- RS-485 MODBUS-RTU<br>- Soft start<br>- Voltage output 3.3-24 VDC, Pmax = 800 mW<br>- Control interface with SELV potential safely disconnected from the mains<br>- Thermal overload protection for electronics/motor<br>- Line undervoltage / phase failure detection<br>- Vibration sensor |
| **Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)** | <= 3.5 mA |
| **Electrical hookup** | Terminal box |



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

| | |
|---|---|
| **Protection class assignment** | I; If a protective earth is connected by the customer<br>This component for installation may have several local protection classes. This information relates to this component's basic design.<br>The final protection class is based on the component's intended installation and connection. |
| **Conformity with standards** | EN 61800-5-1; UKCA; CE |
| **Approval** | UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial panel fan - AxiBlade

sickle-shaped blades (S series)

Fan housing with guide vanes

## Product drawing

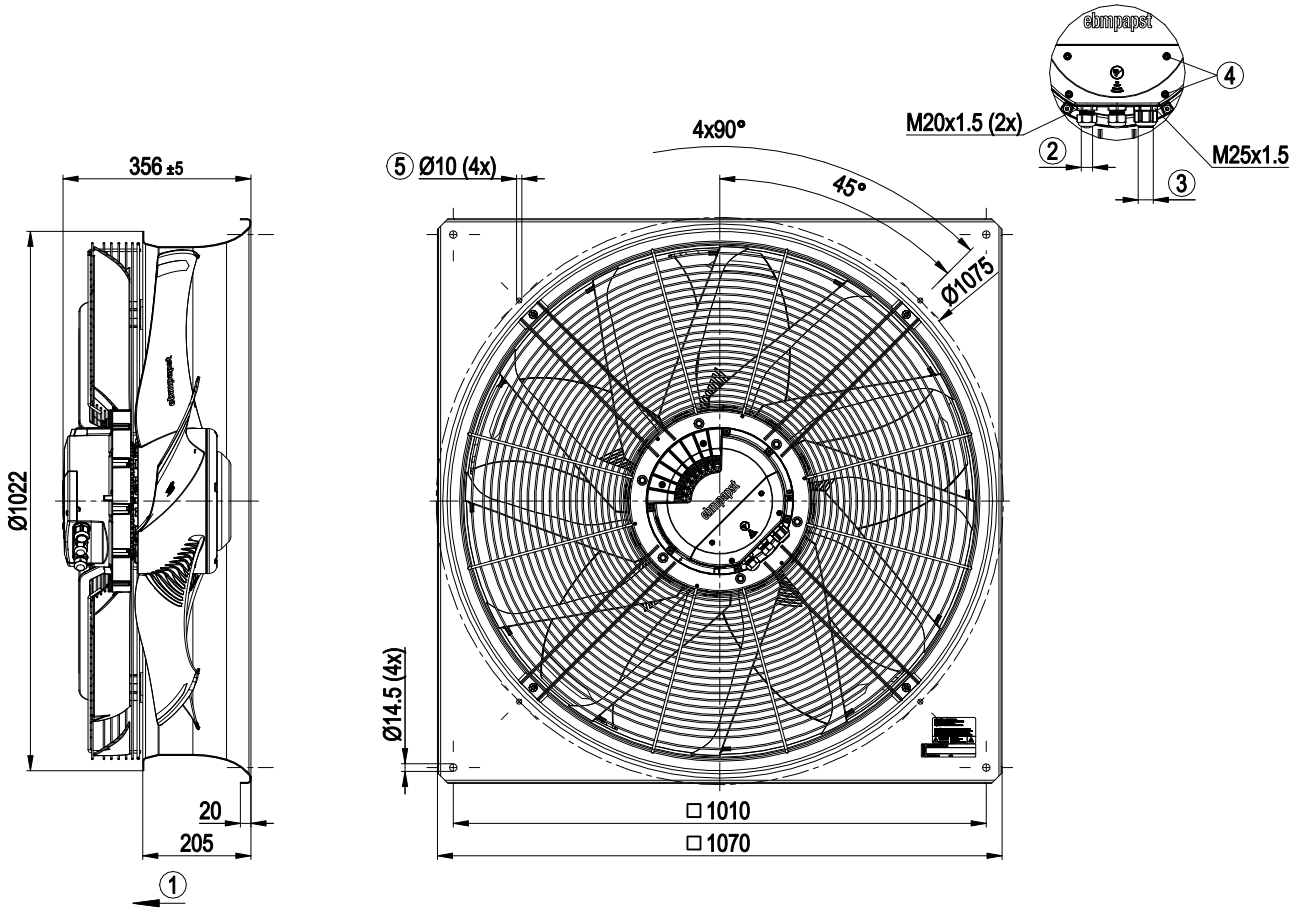


| | |
|---|---|
| 1 | Airflow direction "V" |
| 2 | Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm |
| 3 | Cable diameter min. 5 mm, max. 14 mm, tightening torque 6 ±0.9 Nm |
| | (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted) |
| 4 | Tightening torque 3 ± 0.3 Nm |
| 5 | Attachment holes for FlowGrid 91000-2-2957 (not included in scope of delivery) |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial panel fan - AxiBlade

sickle-shaped blades (S series)

Fan housing with guide vanes

## Mounting dimensions

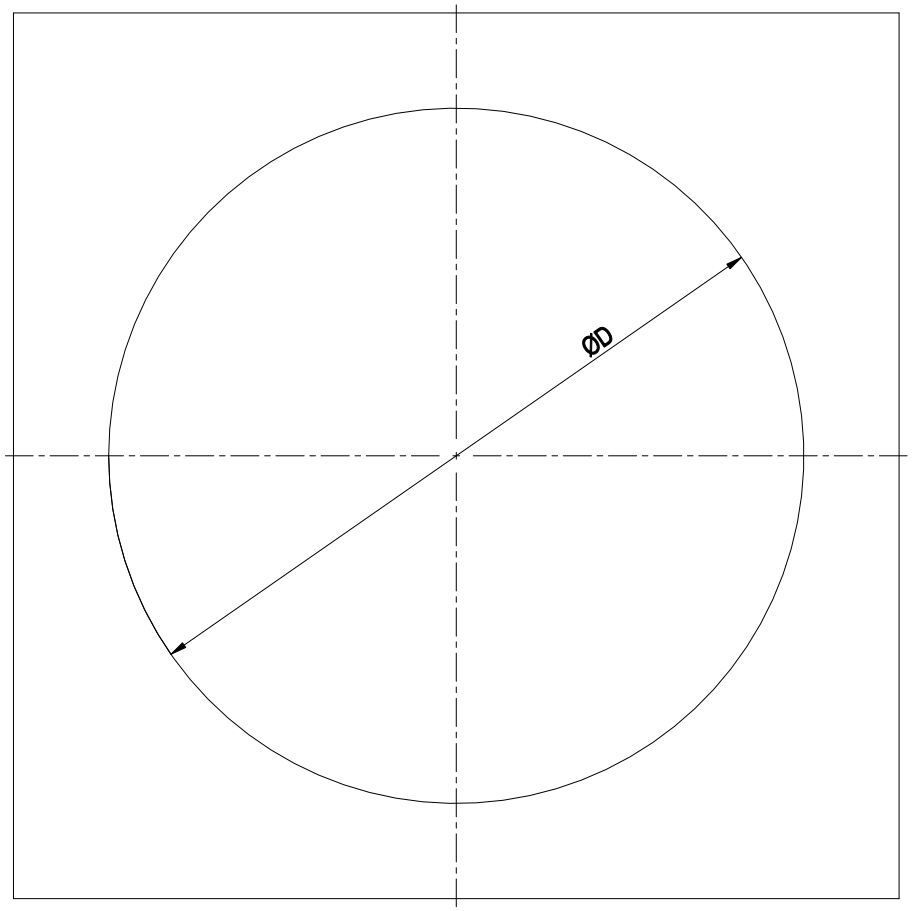


| | |
|---|---|
| | Diameter of the necessary recess for mounting the fan housing in the end device |
| | BG630: D = Ø785 mm |
| | BG710: D = Ø830 mm |
| | BG800: D = Ø950 mm |
| | BG910: D = Ø1050 mm |




ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial panel fan - AxiBlade

sickle-shaped blades (S series)
Fan housing with guide vanes

## Connection diagram

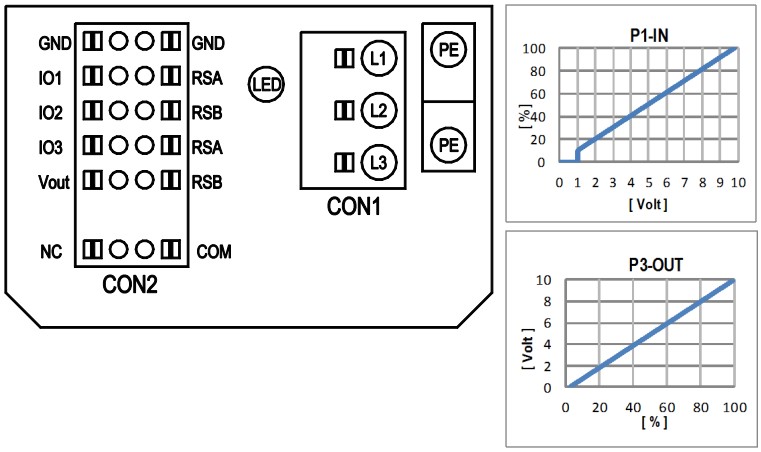


| No. | Conn. | Designation | Function/assignment |
|---|---|---|---|
| | CON1 | L1, L2, L3 | Power supply, phase, see nameplate for voltage range |
| | PE | PE | Protective earth |
| | CON2 | RSA | RS485 interface for MODBUS, RSA; SELV |
| | CON2 | RSB | RS485 interface for MODBUS, RSB; SELV |
| | CON2 | GND | Reference ground for control interface, SELV |
| | CON2 | IO1 | Function parameterizable (see “Optional interface functions” table)<br>Factory setting:<br>Digital input - high active, function: Disable input, SELV<br>- inactive: Pin open or applied voltage < 1.5 VDC<br>- active: applied voltage 3.5-50 VDC<br>Reset function: Triggering of error reset on change of state from "enabled" to "disabled" |
| | CON2 | IO2 | Function parameterizable (see “Optional interface functions” table)<br>Factory setting:<br>Analog input 0-10 V/PWM, Ri=100 kΩ, function: set value<br>Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV |
| | CON2 | IO3 | Function parameterizable (see “Optional interface functions” table)<br>Factory setting:<br>Analog output 0-10 V, max. 5 mA, function: Actual speed<br>Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV |
| | CON2 | Vout | Voltage output 3.3-24 VDC +/-5%, Pmax=800 mW, voltage parameterizable<br>Factory setting: 10 VDC<br>short-circuit-proof, supply for external devices, SELV<br>alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage |
| | CON2 | COM | Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side |
| | CON2 | NC | Status relay, floating status contact, break for failure |
| | | LED | green: status = good, ready for operation<br>orange: status = warning<br>red: status = failure |
| | | P1-IN | Input characteristic curve |
| | | P3-OUT | Output characteristic curve |



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

# EC axial panel fan - AxiBlade

sickle-shaped blades (S series)

Fan housing with guide vanes

## Terminal/plug assignment

| CON2 | configurable IO mode | electrical specification | MODBUS Register for IO mode configuration | configurable IO functions: normal / inverse | INPUT: source: set value D101 [...] | INPUT: source: sensor value D147 [...] | INPUT: switch: parameter set: #1 / #2 D104 [...] | INPUT: switch: control function: heating (pos.) / cooling (neg.) D12E [...] | INPUT: switch: direction of rotation: cw / ccw D148 [...] | INPUT: switch: set value source D16C [...] | INPUT: switch: fan enable / disable D16A [...] | OUTPUT: signal: tach out (selected directly via IO mode) | OUTPUT: signal: diagnostics out (selected directly via IO mode) | OUTPUT: signal: fan modulation level % D130 [0] | OUTPUT: signal: actual speed D130 [1] | OUTPUT: signal: system modulation level % D130 [2] | OUTPUT: signal: remote control output 0-10V D130 [5] | OUTPUT: pulse input for auto-adressing D00C [1] | OUTPUT: pulse output for auto-adressing D130 [4] |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| IO1 | ○ **Din1 (active high)**: digital input | active: applied voltage 3,5-50VDC, SELV<br>not active: pin open or applied voltage < 1,5VDC | D158 [0] | | | | ○ | ○ | ○ | ○ | ○ | | | | | | | | |
| | ○ **Ain1 0-10V/PWM**: analog input | Ri = 100K, characteristic curve parameterizable, $f_{PWM}$ = 1k..10KHz, SELV | D158 [2] | | ○ | | | | | | | | | | | | | | |
| | ○ **Tach out** (open collector output) | Umax = 50VDC, Imax = 20mA, SELV | D158 [5] | | | | | | | | | ○ | | | | | | | |
| | ○ **Diagnostics out** (open collector output) | Umax = 50VDC, Imax = 20mA, SELV | D158 [6] | | | | | | | | | | ○ | | | | | | |
| IO2 | ○ **Din2 (active high)**: digital input | active: applied voltage 3,5-50VDC, SELV<br>not active: pin open or applied voltage < 1,5VDC | D159 [0] | | | | ○ | ○ | ○ | ○ | ○ | | | | | | | | |
| | ○ **Ain2 0-10V/PWM**: analog input | Ri = 100K, characteristic curve parameterizable, $f_{PWM}$ = 1k..10KHz, SELV | D159 [2] | | | ○ | | | | | | | | | | | | | |
| | ○ **Ain2 4-20mA**: analog input | Ri = 125R, characteristic curve parameterizable, SELV | D159 [3] | | | ○ | | | | | | | | | | | | | |
| IO3 | ○ **Din3 (active high)**: digital input | active: applied voltage 3,5-50VDC, SELV<br>not active: pin open or applied voltage < 1,5VDC | D15A [0] | | | | ○ | ○ | ○ | ○ | ○ | | | | | | | | |
| | ○ **Din3 (active low)**: digital input | active: applied voltage < 1,5VDC, SELV<br>not active: pin open or applied voltage 3,5-50VDC | D15A [1] | | | | ○ | ○ | ○ | ○ | ○ | | | | | | | | |
| | ○ **PWMin3**: digital input idle level high | PWM = 40Hz- 10kHz, characteristics parameterizable<br>active: pin open or applied voltage 3,5-50VDC<br>not active: applied voltage < 1,5VDC, SELV | D15A [7] | | ○ | | | | | | | | | | | | | | |
| | ○ **PWMin3**: digital input idle level low | 40Hz- 10kHz, characteristics parameterizable<br>active: applied voltage 3,5-50VDC<br>not active: pin open or applied voltage < 1,5VDC, SELV | D15A [8] | | ○ | | | | | | | | | | | | | | |
| | ○ **Aout3 0-10V**: analog output | function parameterizable, max. 5mA, max output frequency 300Hz, SELV | D15A [4] | | | | | | | | | | | ○ | | ○ | ○ | | ○ |
| | ○ **Tacho out** (pulses), analog output | 0-10V/ max. 5mA, max output frequency 300Hz, SELV | D15A [5] | | | | | | | | | | ○ | | | | | | |
| | ○ **Diagnostics out** (pulses) | 0-10V/ max. 5mA, max output frequency 300Hz, SELV | D15A [6] | | | | | | | | | | | ○ | | | | | |
| RSA<br>RSB | RS485 bus connection, | MODBUS RTU, specification V6.4, SELV | | | ○ | | ○ | ○ | ○ | ○ | ○ | | | | | | | | |
| Vout | voltage output | voltage parameterizable 3,3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV | D16E [...] | | | | | | | | | | | | | | | | |
| | alternatively: Input auxillary power supply for parameterization via RS485/MODBUS RTU without line voltage | 15...50VDC | | | | | | | | | | | | | | | | | |

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.4



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

**8300100509**


VWA0910BTTRS

# EC axial panel fan - AxiBlade

sickle-shaped blades (S series)

Fan housing with guide vanes

## Curves: Air performance 50 Hz

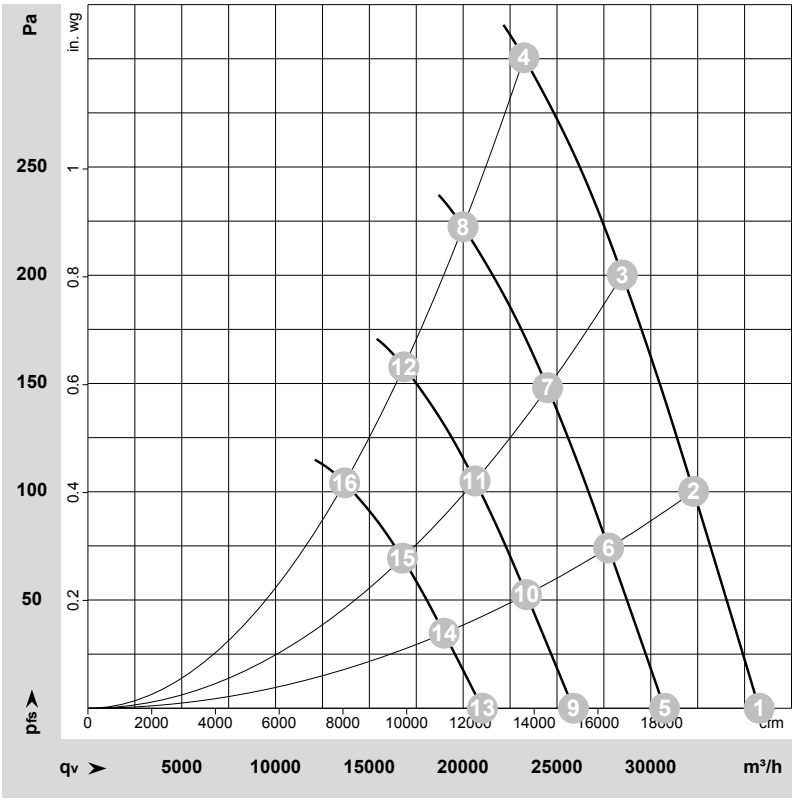


ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-220279-1
Date: 2022-04-11
Housing: 15953-2-4037

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

| | Wired | U | f | n | $P_e$ | I | $LpA_{in}$ | $LwA_{in}$ | $LwA_{out}$ | LwA | $q_V$ | $p_{fs}$ | $q_V$ | $p_{fs}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | V | Hz | $min^{-1}$ | W | A | dB(A) | dB(A) | dB(A) | dB | $m^3/h$ | Pa | cfm | in. wg |
| 1 | 3~ | 400 | 50 | 1100 | 2477 | 3.58 | 75 | 84 | 85 | 88 | 35780 | 0 | 21060 | 0.00 |
| 2 | 3~ | 400 | 50 | 1100 | 2915 | 4.21 | 74 | 83 | 84 | 87 | 32280 | 100 | 19000 | 0.40 |
| 3 | 3~ | 400 | 50 | 1100 | 3311 | 4.78 | 76 | 85 | 84 | 88 | 28480 | 200 | 16765 | 0.80 |
| 4 | 3~ | 400 | 50 | 1100 | 3600 | 5.20 | 81 | 89 | 89 | 92 | 23240 | 300 | 13680 | 1.20 |
| 5 | 3~ | 400 | 50 | 950 | 1570 | 2.27 | 71 | 80 | 81 | 84 | 30730 | 0 | 18090 | 0.00 |
| 6 | 3~ | 400 | 50 | 950 | 1851 | 2.67 | 70 | 80 | 80 | 83 | 27750 | 75 | 16335 | 0.30 |
| 7 | 3~ | 400 | 50 | 950 | 2108 | 3.04 | 72 | 81 | 81 | 84 | 24500 | 148 | 14420 | 0.59 |
| 8 | 3~ | 400 | 50 | 950 | 2298 | 3.32 | 78 | 85 | 85 | 88 | 19995 | 223 | 11765 | 0.90 |
| 9 | 3~ | 400 | 50 | 800 | 938 | 1.35 | 67 | 76 | 77 | 79 | 25880 | 0 | 15230 | 0.00 |
| 10 | 3~ | 400 | 50 | 800 | 1106 | 1.60 | 66 | 75 | 76 | 78 | 23370 | 53 | 13755 | 0.21 |
| 11 | 3~ | 400 | 50 | 800 | 1259 | 1.82 | 68 | 77 | 76 | 79 | 20630 | 105 | 12145 | 0.42 |
| 12 | 3~ | 400 | 50 | 800 | 1372 | 1.98 | 73 | 81 | 81 | 84 | 16835 | 158 | 9910 | 0.63 |
| 13 | 3~ | 400 | 50 | 650 | 503 | 0.73 | 62 | 70 | 72 | 74 | 21025 | 0 | 12375 | 0.00 |
| 14 | 3~ | 400 | 50 | 650 | 593 | 0.86 | 61 | 70 | 70 | 73 | 18990 | 35 | 11175 | 0.14 |
| 15 | 3~ | 400 | 50 | 650 | 675 | 0.97 | 63 | 71 | 71 | 74 | 16765 | 69 | 9865 | 0.28 |
| 16 | 3~ | 400 | 50 | 650 | 736 | 1.06 | 68 | 76 | 76 | 79 | 13680 | 104 | 8050 | 0.42 |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · $P_e$ = Power consumption · I = Current draw · $LpA_{in}$ = Sound pressure level intake side · $LwA_{in}$ = Sound power level intake side
$LwA_{out}$ = Sound power level outlet side · $q_V$ = Air flow · $p_{fs}$ = Pressure increase



ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com