8300100874

VBS0310CSPFS

EC centrifugal fan - RadiPac

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	**8300100874**
Motor	**E09002-28**

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min^{-1}	2590
Power consumption	W	500
Current draw	A	2.2
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	68.8	48.3
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		82.5	62
05 Variable speed drive		Yes	

09 Power consumption P_{ed}	kW	0.49
09 Air flow q_v	m^3/h	2495
09 Pressure increase p_{fs}	Pa	448
10 Speed (rpm) n	min^{-1}	2590
11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = 1 + p_{fs} / 100 000 Pa

LU-224424

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

Technical description

Weight	4.9 kg
Size	310 mm
Motor size	90
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display with LED - Locked-rotor detection - Speed control - External 15-30 VDC input (parameterization) - Alarm relay - Configurable inputs/outputs (I/O) - Power limiter - MODBUS V7.0 - Motor current limitation - PFC, active - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Lateral

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com


Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60335-1; EN 61800-5-1; CE; UKCA
Approval	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiPac

backward-curved, single-intake

Product drawing

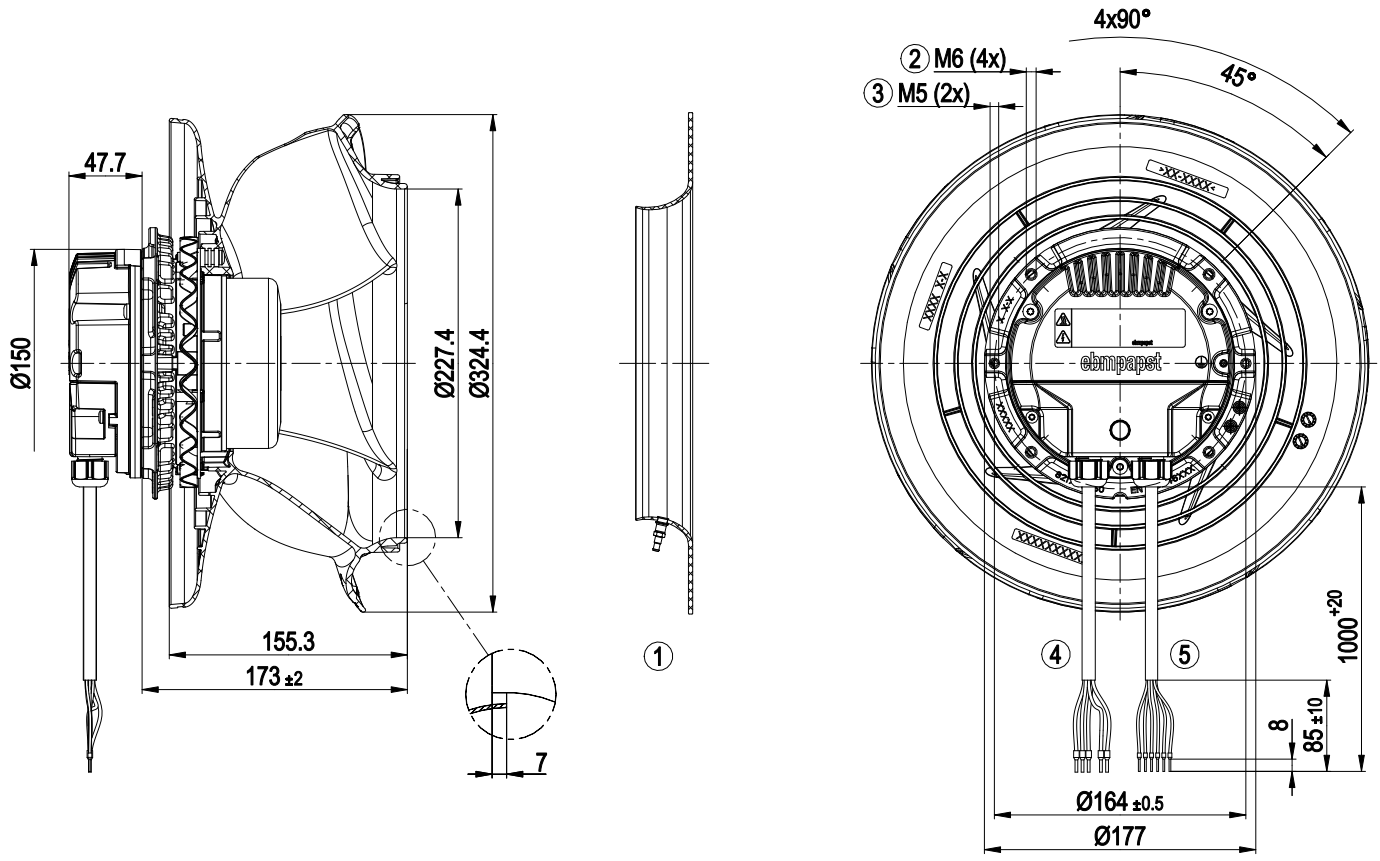


1	Accessory part: Inlet ring 8217102242 with pressure tap (k-factor: 115) (not included in scope of delivery)
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 10 mm
	The M5 tapped holes (2x) can be used to attach hoisting equipment.
4	Supply line (PWR) PVC AWG18
	5x wire-end ferrule
5	Control wire (CTRL) PVC AWG22
	6x wire-end ferrule

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

EC centrifugal fan - RadiPac

backward-curved, single-intake


Accessory part

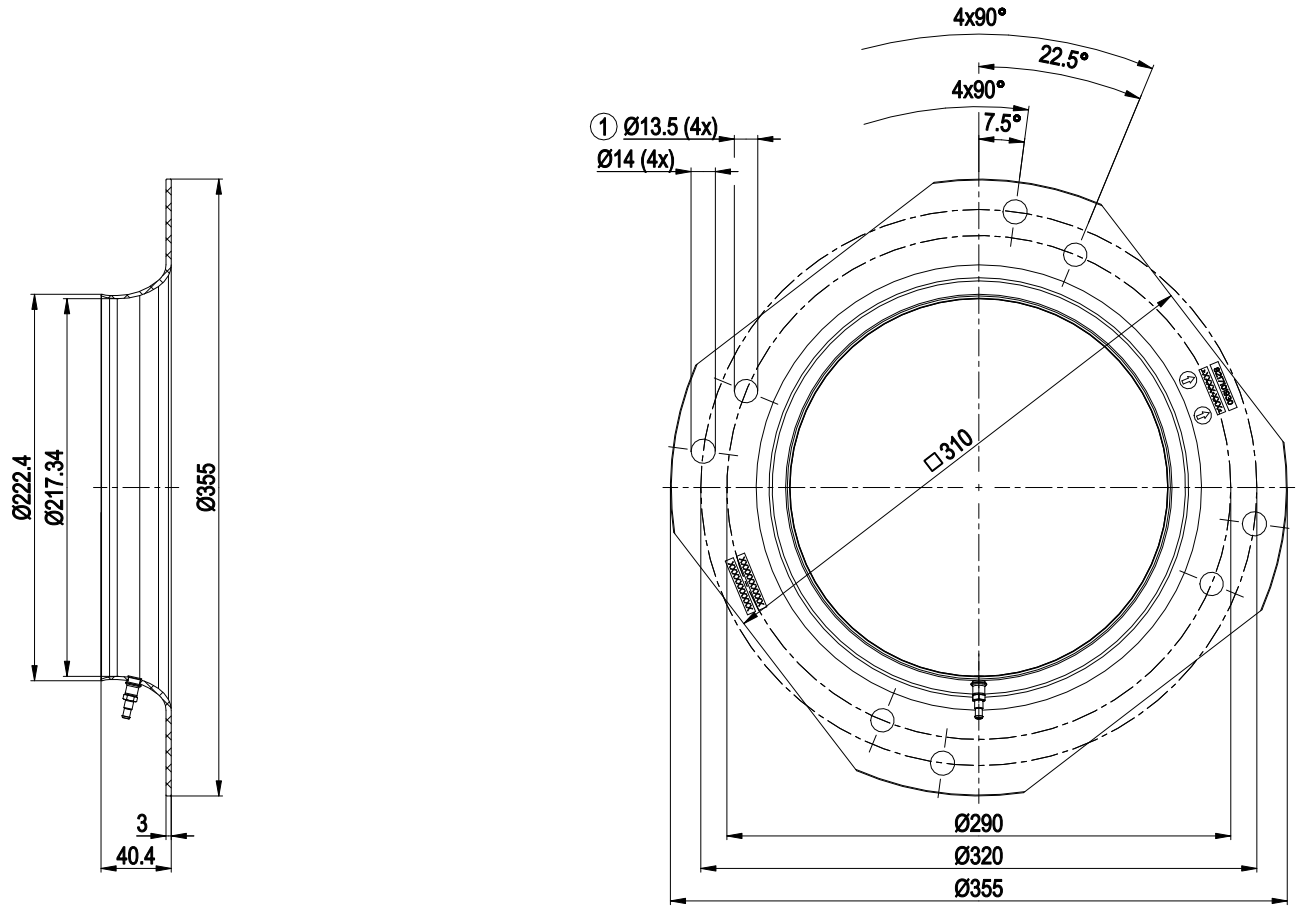

1	Fastening holes for FlowGrid 25310-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required
	Inlet ring 8217102242 with pressure tap (k-factor: 115)

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	PE	green/yellow	Protective earth
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	COM	orange	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	PWR	NC	orange	Status relay, floating status contact, break for failure
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV alternative: 15-30 VDC input for parameterization via MODBUS without line voltage
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable (see table Optional interface functions)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax=20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable (see table Optional interface functions)
	CTRL	RSA	gray	RS-485 interface for MODBUS RSA, SELV dielectric strength to MODBUS RSB +/-14 V, dielectric strength to GND +/-7 V
	CTRL	RSB	brown	RS-485 interface for MODBUS RSB, SELV dielectric strength to MODBUS RSA +/-14 V, dielectric strength to GND +/-7 V
		LED		green: status = good, ready for operation orange: status = warning red: status = failure

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com

Terminal/plug assignment

Medium (M2)

Functions and parameter description
MODBUS V7.0

○ *configurable function*
(○) *function to be activated via IO Mode*

configurable IO functions: normal / inverse

CON2	configurable IO mode	electrical specification	MODBUS Register for IO mode configuration	INPUT: source: set value (D101 [...])	INPUT: source: sensor value (D147 [...])	INPUT: switch: parameter set: #1 / #2 (D104 [...])	INPUT: switch: control function: heating (pos.) /cooling (neg.) (D12E [...])	INPUT: switch: direction of rotation: cw / ccw (D148 [...])	INPUT: switch: set value source (D16C [...])	INPUT: switch: fan enable / disable (D16A [...])	INPUT: source: input pulses autoaddressing (D00C [1])	INPUT: source: DCI in (D638 [...])	OUTPUT: signal: tach out (selection direct via IO)	OUTPUT: signal: diagnostics out (selection direct via IO)	OUTPUT: signal: alarm out (selection direct via IO)	OUTPUT: signal:l output pulses autoaddressing (D130 [4])	OUTPUT: signal: DCI out (D61B)	OUTPUT: signal: fan modulation level % (D130 [0])	OUTPUT: signal: actual speed 1/min (D130 [1])	OUTPUT: signal: system modulation level % (D130 [2])	OUTPUT: signal: remote control output 0-10 V (D130 [5])	OUTPUT: signal: run monitoring (D145)	OUTPUT: signal: status
IO1	○ **Din1 (active high):** digital input	active: applied voltage 3,5-50 VDC, SELV not active: pin open or applied voltage < 1,5 VDC SELV	D158 [0]			○	○	○	○	○	○	○											
	○ **Din1 (active low):** digital input	active: applied voltage < 1,5 VDC, SELV not active: pin open or applied voltage 3,5-50 VDC SELV	D158 [1]			○	○	○	○	○	○	○											
	○ **Ain1 0-10 V/PWM:** analog input	Ri = 100 kΩ, characteristic curve parameterizable, f_{PWM} = 1k..10 kHz, SELV	D158 [2]	○	○																		
	○ **Ain1 0-10 V/PWM (with pull up):** analog input	Ri = 100 kΩ, characteristic curve parameterizable, f_{PWM} = 1k..10 kHz, SELV	D158 [9]	○	○																		
IO2	○ **Din1 (active high):** digital input	active: applied voltage 3,5-50 VDC, SELV not active: pin open or applied voltage < 1,5 VDC SELV	D159 [0]			○	○	○	○	○													
	○ **Ain1 0-10 V/PWM:** analog input	Ri = 100 kΩ, characteristic curve parameterizable, f_{PWM} = 1k..10 kHz, SELV	D159 [2]	○	○																		
	○ **Tach out** (open collector)	Umax=50 VDC, Imax=20 mA, SELV	D159 [5]										(○)										
	○ **Diagnostics out** (open collector)	Umax=50 VDC, Imax=20 mA, SELV	D159 [6]											(○)									
	○ **Alarm out** (open collector)	Umax=50 VDC, Imax=20 mA, SELV	D159 [10]												(○)								
	○ **Test pulse output addressing** (open collector)	Umax=50 VDC, Imax=20 mA, SELV	D159 [11]													(○)							
	○ **DCI-output** (open collector)	Umax=50 VDC, Imax=20 mA, SELV	D159 [12]														(○)						
RSA RSB	**RS485 bus connection**	MODBUS RTU, parameter specification V7, SELV		○		○	○	○	○	○													
COM NC	**Relay**	250 VAC / 2 A (AC1)																				○	○
Vout	**Voltage output**	Voltage 10 VDC, SELV																					
	Alternatively: Input auxillary power supply for parameterization via RS485/MODBUS RTU without line voltage	15...30 VDC																					

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com


8300100874

VBS0310CSPFS

EC centrifugal fan - RadiPac

backward-curved, single-intake

Curves: Air performance 50 Hz

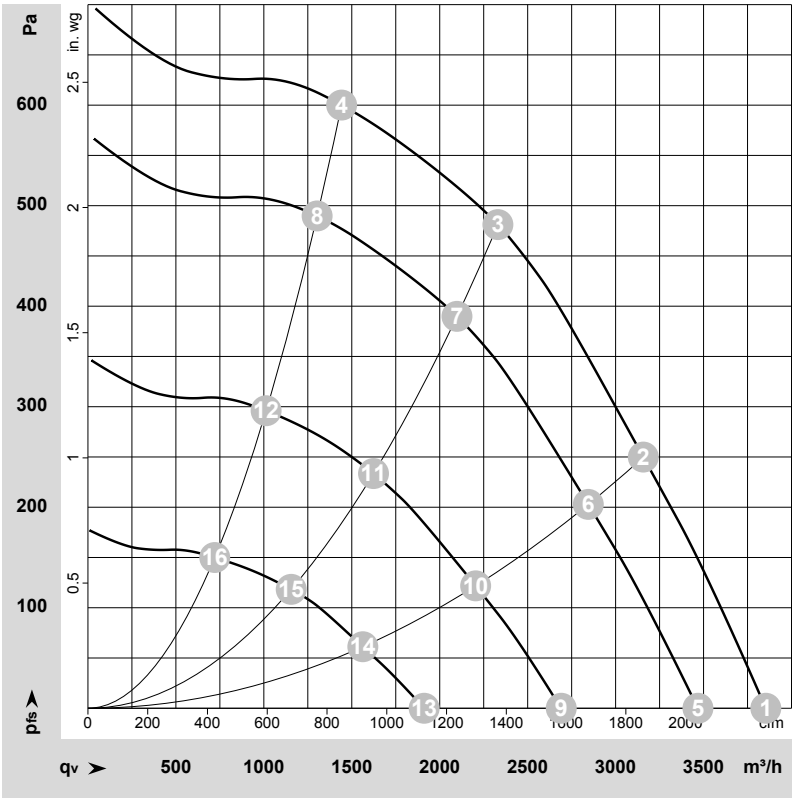

ρ = 1.15 kg/m³ ± 2 %

Measurement: LU-224424-1
Date: 2022-12-08
Nozzle: 8217101930

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P_e	I	LpA_{in}	LwA_{in}	LwA_{out}	LwA	q_V	p_{fs}	q_V	p_{fs}
		V	Hz	min^{-1}	W	A	dB(A)	dB(A)	dB(A)	dB	m^3/h	Pa	cfm	in. wg
1	1~	230	50	2590	353	1.57	73	81	85	87	3855	0	2270	0.00
2	1~	230	50	2590	432	1.91	66	74	79	80	3160	250	1860	1.00
3	1~	230	50	2590	500	2.20	63	70	77	77	2330	480	1370	1.93
4	1~	230	50	2590	471	2.08	68	75	79	81	1440	600	850	2.41
5	1~	230	50	2335	262	1.18	70	79	82	84	3470	0	2040	0.00
6	1~	230	50	2335	320	1.43	63	71	76	78	2845	203	1675	0.81
7	1~	230	50	2335	370	1.65	61	68	74	75	2100	390	1235	1.57
8	1~	230	50	2335	349	1.55	65	72	76	78	1305	491	765	1.97
9	1~	230	50	1820	134	0.63	64	72	76	77	2690	0	1585	0.00
10	1~	230	50	1815	160	0.74	57	66	70	71	2205	122	1295	0.49
11	1~	230	50	1815	183	0.83	55	62	68	69	1625	234	955	0.94
12	1~	230	50	1815	174	0.79	58	65	69	71	1015	297	595	1.19
13	1~	230	50	1295	59	0.34	57	65	69	70	1910	0	1125	0.00
14	1~	230	50	1300	68	0.37	50	58	63	64	1565	61	920	0.24
15	1~	230	50	1295	76	0.40	48	55	60	61	1155	118	680	0.47
16	1~	230	50	1300	73	0.39	49	56	60	62	720	150	425	0.60

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_V = Air flow · p_{fs} = Pressure increase

ebm-papst Mulfingen GmbH & Co. KG · Bachmühle 2 · D-74673 Mulfingen · Phone +49 (0) 7938 81-0 · Fax +49 (0) 7938 81-110 · info1@de.ebmpapst.com · www.ebmpapst.com