

DRAWING NO		REV.	A0

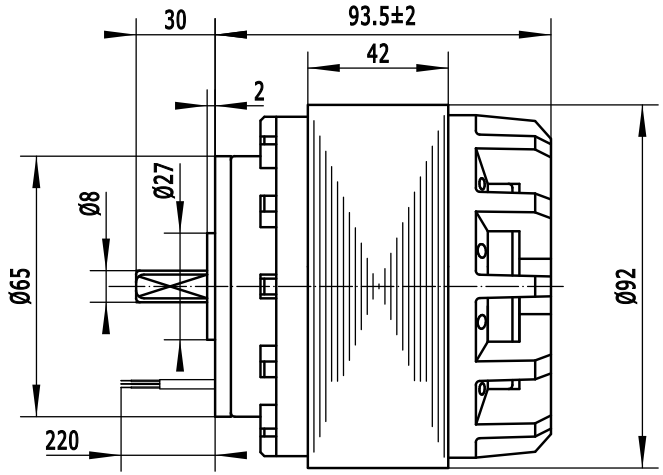

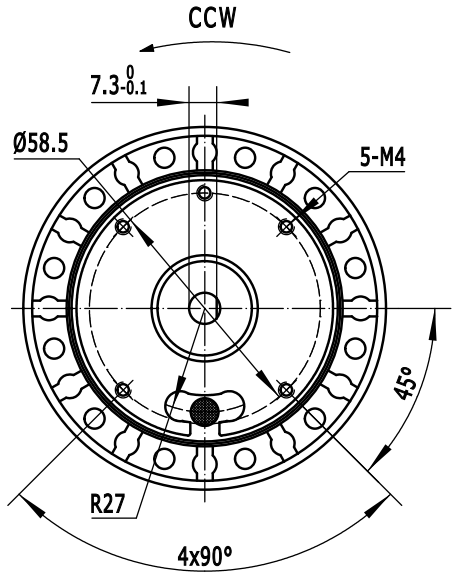

External Rotor Motor

Hangzhou Weiguang Electronic Co.,Ltd.

Unit: External Rotor Motor	Type:
Motor: single phase motor with capacitor	Customer:
Motor type: YWF2E-92/42B-K	Customer-type:

Type	Voltage v	Frequency Hz	Input power W	Current A	Speed r/min	capacitor μF/VAC
YWF4E-92/42B-K	230	50	200	1.1	2600	6μF

Insulation class : F	Operating type: S_1
Permissible ambient temperature : -30℃~60℃	Temperature increase:
Motor protection:thermocontact 150±5℃	Bearings: ball bearings
Type of protection:	License: CE

Model meanings: YWF2E 92 / 42 B - K


- YWF2E: External rotor motor
- 92: Motor poles
- 42: Single Phase, Rotor diameter
- B: The thickness of laminated core
- -: CW(From the rotor head)
- K: Leak out

Electrical connection:lead wire Silikon 4*0.5mm², Length 220±20mm

LABEL:

WEIGUANG® YWF2E-92/42B-K
230V 50Hz 1.1A 110/200W 2600r/min
6μF/450V CL.F IP23 XX/XX
CE

Wiring diagram:

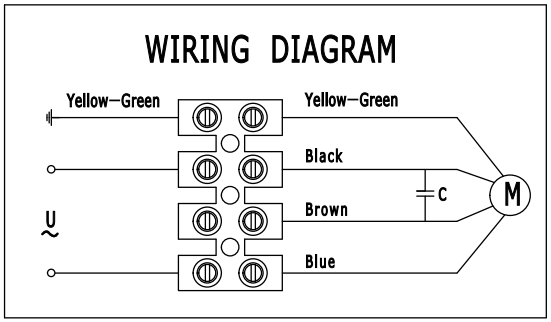

APPROX.WEIGHT	
MEANS	

				DECIMAL	TOLERANCE		SIGN	DATE
				X	±0.5	DRN.BY		
				X.X	±0.25	CHD.BY		
				X.XX	±0.15	ENG.BY		
REV.	DESCRIPTION	APPROVED	DATE	ANGLE	±3°	APP.BY		

TITLE: YWF2E-92/42B-K

PROJECTION

A4

SCALE

SHEET: 1 of 1